




Audio Processor with Sound Enhancement and TruSurround 5.1ch Virtualizer

■ GENERAL DESCRIPTION

The NJW1149 is an audio processor with BBE sound enhancement and SRS Labs' TruSurround 5.1 channel virtualizer. It includes all of functions processing audio signal for TV, such as volume, balance, mute, tone control, eala NJRC original surround and simulated stereo functions. All of internal status and variables are controlled by I²C BUS.

■ PACKAGE OUTLINE




NJW1149FC2


■ FEATURES

- Operating Voltage 8 to 10 V
- I²C BUS Interface
- TruSurround 5.1ch. / 4ch. / 2ch. Inputs
- BBE 0dB to +15dB(0.5dB/step)
- eala (surround effect ; 2 steps) and Simulated Stereo
- Volume 0 to -80dB, MUTE (0.33dB/step)
- Balance 0 to -30dB, MUTE (1dB/step)
- Tone Control -15dB to +15dB(0.5dB/step)
- Bi-CMOS Technology
- Package Outline QFP64-C2

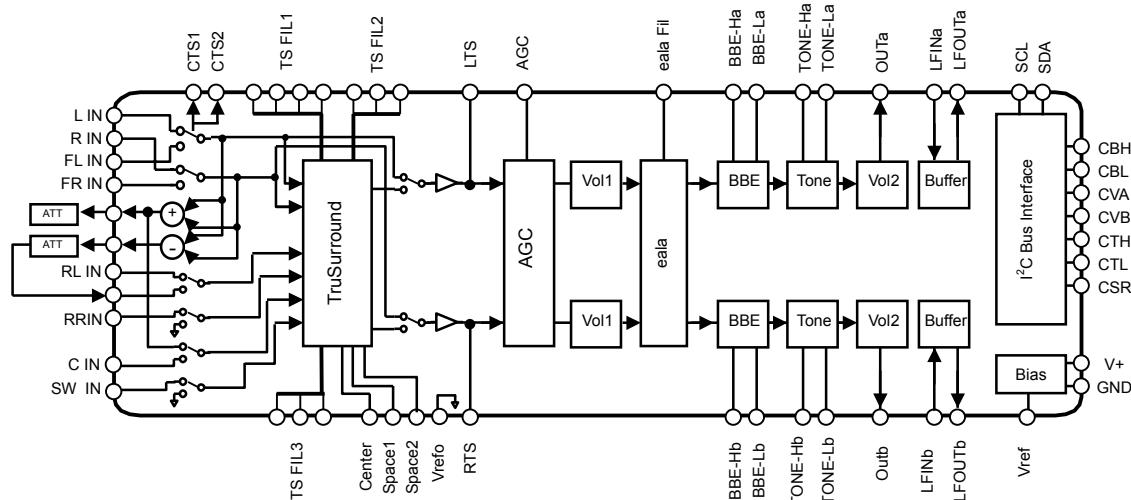■ BLOCK DIAGRAM



■ PIN FUNCTION

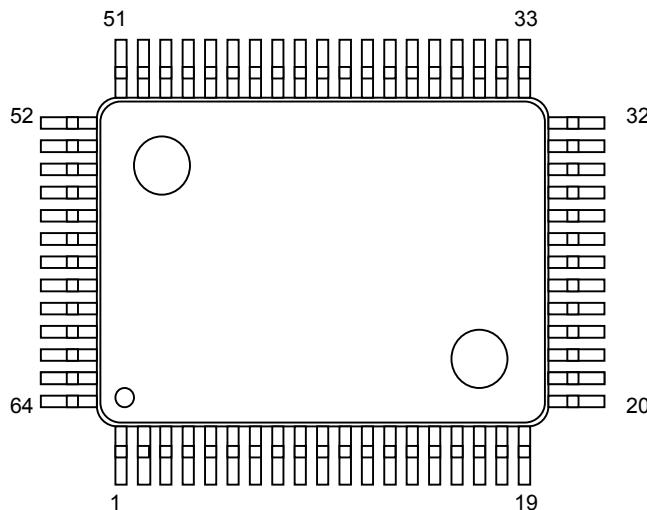

| No. | SYMBOL | FUNCTION | No. | SYMBOL | FUNCTION |
|-----|---------|---|-----|---------|---|
| 1 | TS11 | TruSurround Filter Capacitor 11 | 33 | CBH | BBE High switching noise rejection Capacitor |
| 2 | TS12 | TruSurround Filter Capacitor 12 | 34 | LFOUTb | Buffer Output for Bch Low Pass Filter |
| 3 | TS13 | TruSurround Filter Capacitor 13 | 35 | LFINb | Buffer Input for Bch Low Pass Filter |
| 4 | TS14 | TruSurround Filter Capacitor 14 | 36 | OUTb | Bch Output |
| 5 | SPACE1 | SPACE Volume1 | 37 | TONE-Lb | Bch TONE Bass Filter Capacitor |
| 6 | SPACE2 | SPACE Volume2 | 38 | TONE-Hb | Bch TONE Treble Filter Capacitor |
| 7 | CENTER | CENTER Volume | 39 | BBE2b | Bch BBE Low-Pass Filter Capacitor |
| 8 | VREFO | Reference Voltage Output Capacitor | 40 | BBE1b | Bch BBE High-Pass Filter Capacitor |
| 9 | N.C. | No Connection | 41 | CSR | eala switching noise rejection Capacitor |
| 10 | LTS | Lch TruSurround Output | 42 | RTS | Rch TruSurround Output |
| 11 | ealaFil | eala Filter Capacitor | 43 | N.C. | No Connection |
| 12 | BBE1a | Ach BBE High-Pass Filter Capacitor | 44 | CTS2 | TruSurround switching noise rejection Capacitor 2 |
| 13 | BBE2a | Ach BBE Low-Pass Filter Capacitor | 45 | CTS1 | TruSurround switching noise rejection Capacitor 1 |
| 14 | TONE-Ha | Ach TONE Treble Filter Capacitor | 46 | N.C. | No Connection |
| 15 | TONE-La | Ach TONE Bass Filter Capacitor | 47 | TS33 | TruSurround Filter Capacitor 33 |
| 16 | OUTa | Ach Output | 48 | TS32 | TruSurround Filter Capacitor 32 |
| 17 | LFINA | Buffer Input for Ach Low Pass Filter | 49 | TS31 | TruSurround Filter Capacitor 31 |
| 18 | LFOUTa | Buffer Output for Ach Low Pass Filter | 50 | N.C. | No Connection |
| 19 | AGC | AGC Smoothing Filter Capacitor | 51 | ATTC | Center Attenuation Resistor |
| 20 | CVA | Ach Volume switching noise rejection Capacitor | 52 | ATTS2 | Surround Attenuation Resistor 2 |
| 21 | CVB | Bch Volume switching noise rejection Capacitor | 53 | ATTS1 | Surround Attenuation Resistor 1 |
| 22 | SDA | I ² C Data Input | 54 | TS23 | TruSurround Filter Capacitor 23 |
| 23 | SCL | I ² C Clock Input | 55 | TS22 | TruSurround Filter Capacitor 22 |
| 24 | GND | Ground | 56 | TS21 | TruSurround Filter Capacitor 21 |
| 25 | N.C. | No Connection | 57 | SWIN | SW ch Input |
| 26 | N.C. | No Connection | 58 | CIN | C ch Input |
| 27 | N.C. | No Connection | 59 | RRIN | Rear-R ch Input |
| 28 | V+ | Power Supply | 60 | RLIN | Rear-L ch Input |
| 29 | VREF | Reference Voltage stabilizing Capacitor | 61 | FRIN | Front-R ch Input |
| 30 | CTL | Tone Control Bass switching noise rejection Capacitor | 62 | FLIN | Front-L ch Input |
| 31 | CTH | Tone Control Treble switching noise rejection Capacitor | 63 | RIN | R ch Input |
| 32 | CBL | BBE Low switching noise rejection Capacitor | 64 | LIN | L ch Input |

■ ABSOLUTE MAXIMUM RATING (Ta=25°C)

| PARAMETER | SYMBOL | RATING | UNIT |
|-----------------------------|------------------|-------------|------|
| Supply Voltage | V ⁺ | 12 | V |
| Power Dissipation | P _D | 1000 | mW |
| Operating Temperature Range | T _{opr} | -20 to +75 | °C |
| Storage Temperature Range | T _{stg} | -40 to +125 | °C |

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, V⁺=9V, R_L=47kΩ, Vin=100mVrms/1kHz
MODE ; VOL=0dB, BAL=0dB, TS=By-Pass, AGC=OFF, BBE=OFF, Tone=0dB, eala=By-Pass)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------|-------------------|-----------------------------------|------|---------------|---------------|----------------|
| Operating Voltage | V ⁺ | | 8.0 | 9.0 | 10.0 | V |
| Supply Current | I _{CC} | No Signal | - | 30 | 45 | mA |
| Reference Voltage | V _{REF} | No Signal | 4.0 | 4.5 | 5.0 | V |
| Maximum Input Voltage | V _{IM} | VOL=-20dB, THD=10% | 2.8 | 3.0 | - | Vrms |
| Maximum Output Voltage | V _{OM} | OUTPUT VOL=0dB, THD=1% | - | 2.5 | - | Vrms |
| Channel Balance | G _{CB} | VOL=0dB | -1.5 | 0.0 | 1.5 | dB |
| Balance Boost A | G _{BBA} | CHS="0", BAL=Mute | -2.0 | 0.0 | 2.0 | dB |
| Balance Cut A | G _{BCA} | CHS="1", BAL=Mute Vin = 1Vrms | - | - | -70 | dB |
| Balance Boost B | G _{BBB} | CHS="1", BAL=Mute | -2.0 | 0.0 | 2.0 | dB |
| Balance Cut B | G _{BCB} | CHS="0", BAL=Mute Vin = 1Vrms | - | - | -70 | dB |
| Total Harmonic Distortion | THD | Vo=0.5Vrms BW=400Hz to 30kHz | - | - | 0.5 | % |
| Maximum Voltage Gain | G _{VMAX} | VOL= 0dB | -2.0 | 0.0 | 2.0 | dB |
| Minimum Voltage Gain | G _{VMIN} | VOL= Mute | - | - | -70 | dB |
| Channel Separation | CS | Vin = 1Vrms | - | - | -70 | dB |
| Output Noise 1 | V _{NO1} | VOL = 0dB BW=400Hz to 30kHz | - | -90 (31.6) | -85 (56.2) | dBV (μVrms) |
| Output Noise 2 | V _{NO2} | VOL = Mute BW = 400Hz to 30kHz | - | -106 (5.0) | -96 (15.8) | dBV (μVrms) |

BW : Band Width

◆ TONE CONTROL CHARACTERISTICS (Ta=25°C, V⁺=9V, R_L=47kΩ, Vin=100mVrms/1kHz
MODE ; VOL=0dB, BAL=0dB, TS=By-Pass, AGC=OFF, BBE=OFF, eala=By-Pass)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-------------------|--------------------|---------------------|-------|-------|-------|------|
| Treble Boost Gain | G _{HFBST} | TREB=+15dB, f=10kHz | 12.5 | 15.0 | 17.5 | dB |
| Treble Boost Flat | G _{HFFLT} | TREB=0dB, f=10kHz | -2.0 | 0.0 | 2.0 | dB |
| Treble Boost Cut | G _{HFCUT} | TRBE=-15dB, f=10kHz | -17.5 | -15.0 | -12.5 | dB |
| Bass Boost Gain | G _{LFBST} | BASS=+15dB, f=100Hz | 12.5 | 15.0 | 17.5 | dB |
| Bass Boost Flat | G _{LFFLT} | BASS=0dB, f=100Hz | -2.0 | 0.0 | 2.0 | dB |
| Bass Boost Cut | G _{LFCUT} | BASS=-15dB, f=100Hz | -17.5 | -15.0 | -12.5 | dB |

◆AGC CHARACTERISTICS (Ta=25°C, V⁺=9V, R_L=47kΩ
MODE ; VOL=0dB, BAL=0dB, TS=By-Pass, AGC=ON, BBE=OFF, Tone=0dB, eala=By-Pass)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|------------|----------------------|----------------------|------|------|------|------|
| AGC Boost | G _{AGCBST} | Vin=50mVrms, f=1kHz | 1.5 | 3.5 | 5.5 | dB |
| AGC Flat 1 | G _{AGCFLT1} | Vin=300mVrms, f=1kHz | -2.5 | 0.0 | 2.5 | dB |
| AGC Flat 2 | G _{AGCFLT2} | Vin=400mVrms, f=1kHz | -2.5 | 0.0 | 2.5 | dB |
| AGC Flat 3 | G _{AGCFLT3} | Vin=500mVrms, f=1kHz | -2.5 | 0.0 | 2.5 | dB |
| AGC Flat 4 | G _{AGCFLT4} | Vin=600mVrms, f=1kHz | -2.5 | 0.0 | 2.5 | dB |
| AGC Cut | G _{AGCCUT} | Vin=2Vrms, f=1kHz | -14 | -10 | -6.0 | dB |

◆BBE CHARACTERISTICS (Ta=25°C, V⁺=9V, R_L=47kΩ, Vin=100mVrms/1kHz
MODE ; VOL=0dB, BAL=0dB, TS=By-Pass, AGC=OFF, Tone=0dB, eala=By-Pass)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-----------------|-----------------------|--------------------------|------|------|------|------|
| Low Boost Gain | G _{B BELOW} | BBE-LOW =+15dB, f=50Hz | 12.5 | 15 | 17.5 | dB |
| High Boost Gain | G _{B BEHIGH} | BBE-HIGH =+15dB, f=10kHz | 12.5 | 15 | 17.5 | dB |

◆eala CHARACTERISTICS (Ta=25°C, V⁺=9V, R_L=47kΩ, Vin=100mVrms/1kHz
MODE ; VOL=0dB, BAL=0dB, TS=By-Pass, AGC=OFF, BBE=0dB, Tone=0dB)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------|-------------------|---------------------------|------|------|------|------|
| Simulated Stereo A | G _{SIMA} | LIN+RIN→OUTa, f=1KHz, SIM | 1.0 | 3.0 | 5.0 | dB |
| Simulated Stereo B | G _{SIMB} | LIN+RIN→OUTb, f=1KHz, SIM | 1.0 | 3.0 | 5.0 | dB |
| Surround 3D1 | G _{3D1} | LIN→OUTa, f=100Hz, SR2 | 5.5 | 7.5 | 9.5 | dB |
| Surround 3D2 | G _{3D2} | LIN→OUTa, f=10KHz, SR2 | -2.0 | 0.0 | 2.0 | dB |
| Surround 3D3 | G _{3D3} | LIN→OUTb, f=100Hz, SR2 | 0.5 | 2.5 | 4.5 | dB |
| Surround 3D4 | G _{3D4} | LIN→OUTa, f=100Hz, SR1 | 3.5 | 5.5 | 7.5 | dB |


◆TruSurround CHARACTERISTICS (Ta=25°C, V⁺=9V, R_L=47kΩ, Vin=100mVrms/1kHz
MODE; VOL=0dB, BAL=0dB, AGC=OFF, BBE=OFF, Tone=0dB, eala=By-Pass)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-------------------|----------------------|---|------|------|------|------|
| Mix Down Gain | G _{TSMX} | FLIN→LTS, f=1KHz Mix Down | -5 | -3 | -1 | dB |
| By-Pass Gain | G _{TSBP} | LIN→LTS, f=1KHz By-Pass | -2 | 0 | 2 | dB |
| Tru Front Gain | G _{TSF} | FLIN→LTS, f=125Hz TS5.1ch | -0.5 | 1.5 | 3.5 | dB |
| Tru Rear Gain 1 | G _{TSR1} | RLIN→LTS, f=125Hz TS5.1ch | 1 | 3 | 5 | dB |
| Tru Rear Gain 2 | G _{TSR2} | RLIN→LTS, f=125Hz TS4ch | 2 | 4 | 6 | dB |
| Center Gain | G _{TSC} | CIN→LTS, f=1KHz TS4ch | -5 | -3 | -1 | dB |
| Sub Woofer Gain | G _{TSS} | SWIN→LTS, f=1KHz TS4ch | -2 | 0 | 2 | dB |
| Feed Through Gain | G _{THROUGH} | LIN→LTS, f=1KHz SRS 3D, Space=Min, Center=Min | -20 | -18 | -16 | dB |
| L+R Gain | G _{L+R} | LIN→RTS, f=1KHz SRS 3D, Space=Min, Center=Max | -15 | -13 | -11 | dB |
| L-R Gain | G _{L-R} | LIN→LTS, f=125Hz SRS 3D, Space=Max, Center=Min | -2 | 0 | 2 | dB |
| Passive Gain 1 | G _{TSP1} | LIN→LTS, f=125Hz TS2ch, Space=Max, Center=Max | 4.0 | 6.0 | 8.0 | dB |
| Passive Gain 2 | G _{TSP2} | LIN→RTS, f=125Hz TS2ch, Space=Max, Center=Max | -5.5 | -3.5 | -1.5 | dB |


■ I²C BUS CHARACTERISTICS (SDA, SCL)

I²C BUS Load Conditions: Pull up resistance 4kΩ (Connected to +5V), Load capacitance 200pF (Connected to GND)


| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|---|--------------|------|------|------|------|
| High Level Input Voltage | V_{IH} | 3.0 | - | 5.0 | V |
| Low Level Input Voltage | V_{IL} | 0 | - | 1.5 | V |
| High Level Input Current | I_{IH} | - | - | 10 | μA |
| Low Level Input Current | I_{IL} | - | - | 10 | μA |
| Low Level Output Voltage (3mA at SDA pin) | V_{OL} | 0 | - | 0.4 | V |
| Maximum Output Current | I_{OL} | -3.0 | - | - | mA |
| Maximum Clock Frequency | f_{SCL} | 0 | - | 100 | kHz |
| Data Change Minimum Waiting Time | t_{BUF} | 4.7 | - | - | μs |
| Data Transfer Start Minimum Waiting Time | $t_{HD:STA}$ | 4.0 | - | - | μs |
| Low Level Clock Pulse Width | t_{LOW} | 4.7 | - | - | μs |
| High Level Clock Pulse Width | t_{HIGH} | 4.0 | - | - | μs |
| Minimum Start Preparation Waiting Time | $t_{SU:STA}$ | 4.7 | - | - | μs |
| Minimum Data Hold Time | $t_{HD:DAT}$ | 5.0 | - | - | μs |
| Minimum Data Preparation Time | $t_{SU:DAT}$ | 250 | - | - | ns |
| Rise Time | t_R | - | - | 1.0 | μs |
| Fall Time | t_F | - | - | 300 | ns |
| Minimum Stop Preparation Waiting Time | $t_{SU:STO}$ | 4.7 | - | - | μs |

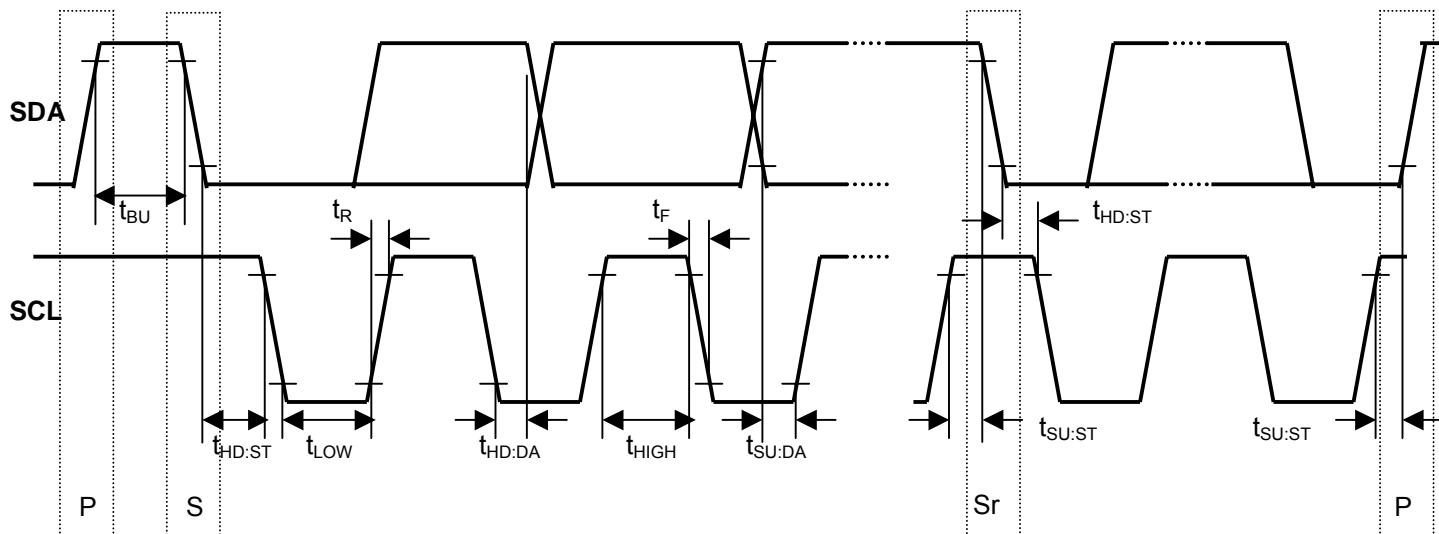

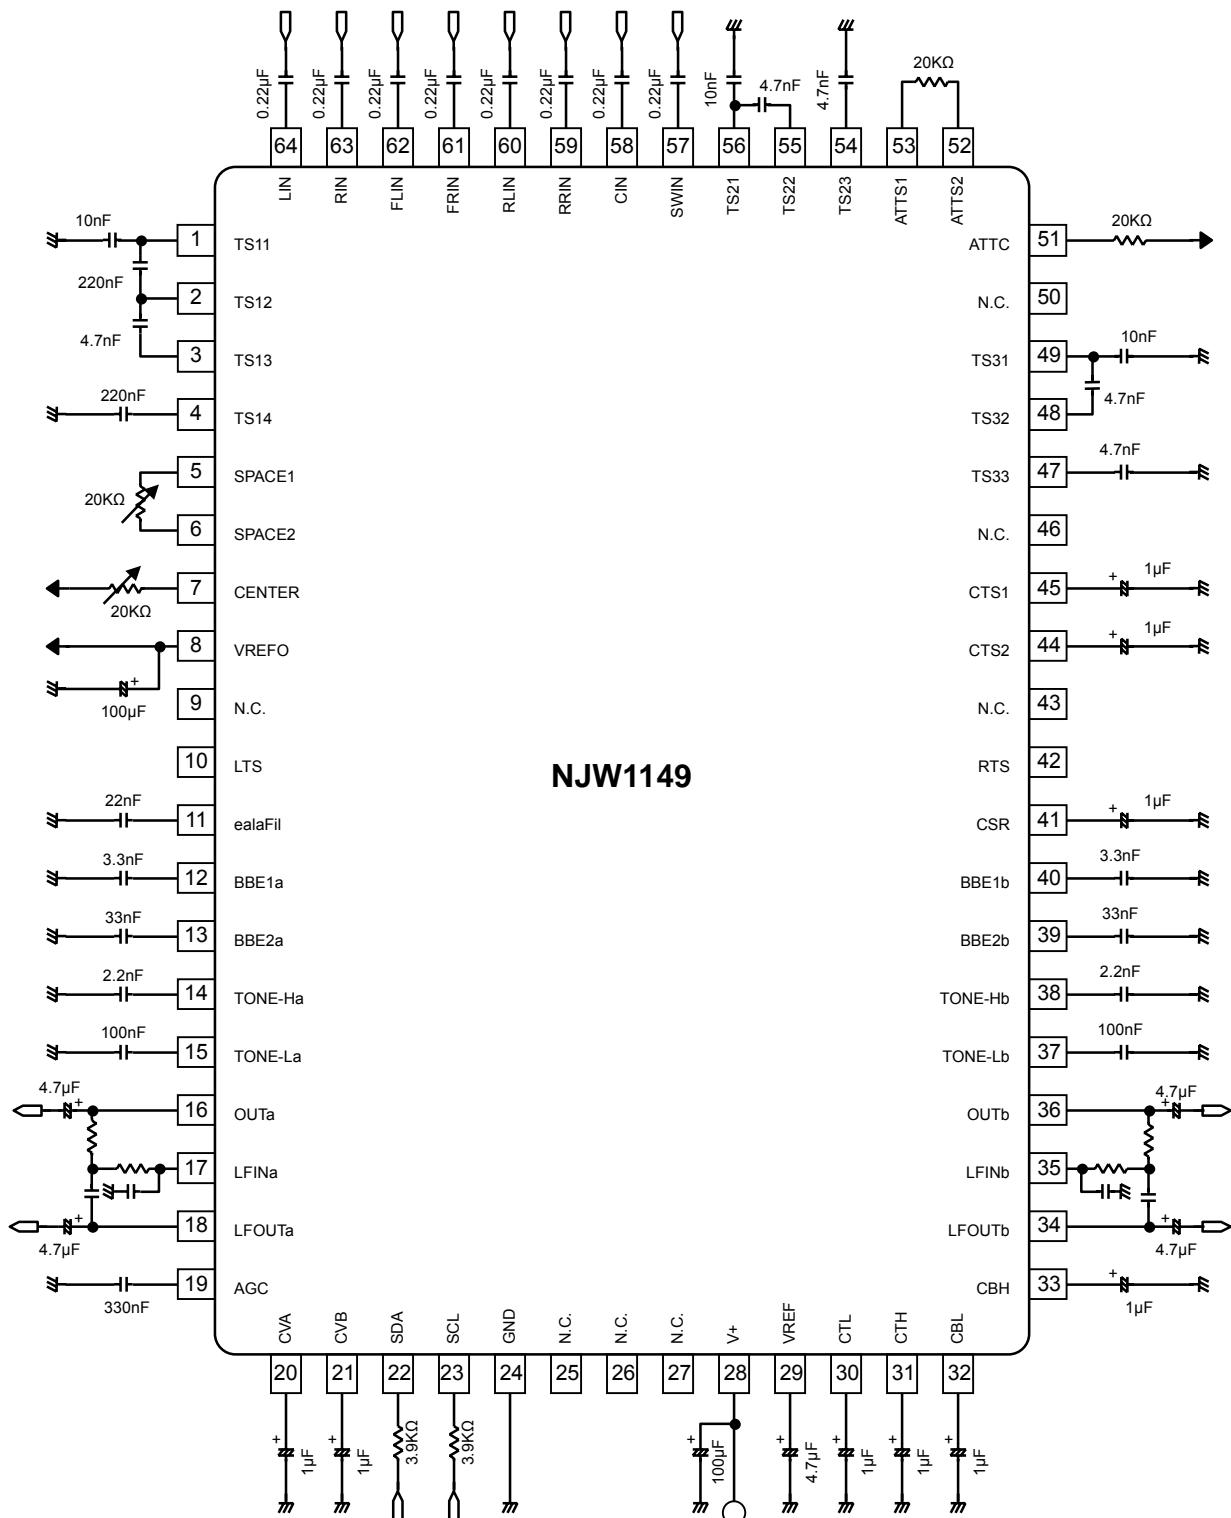■ APPLICATION CIRCUIT 1 (Bi-Amp outputs)



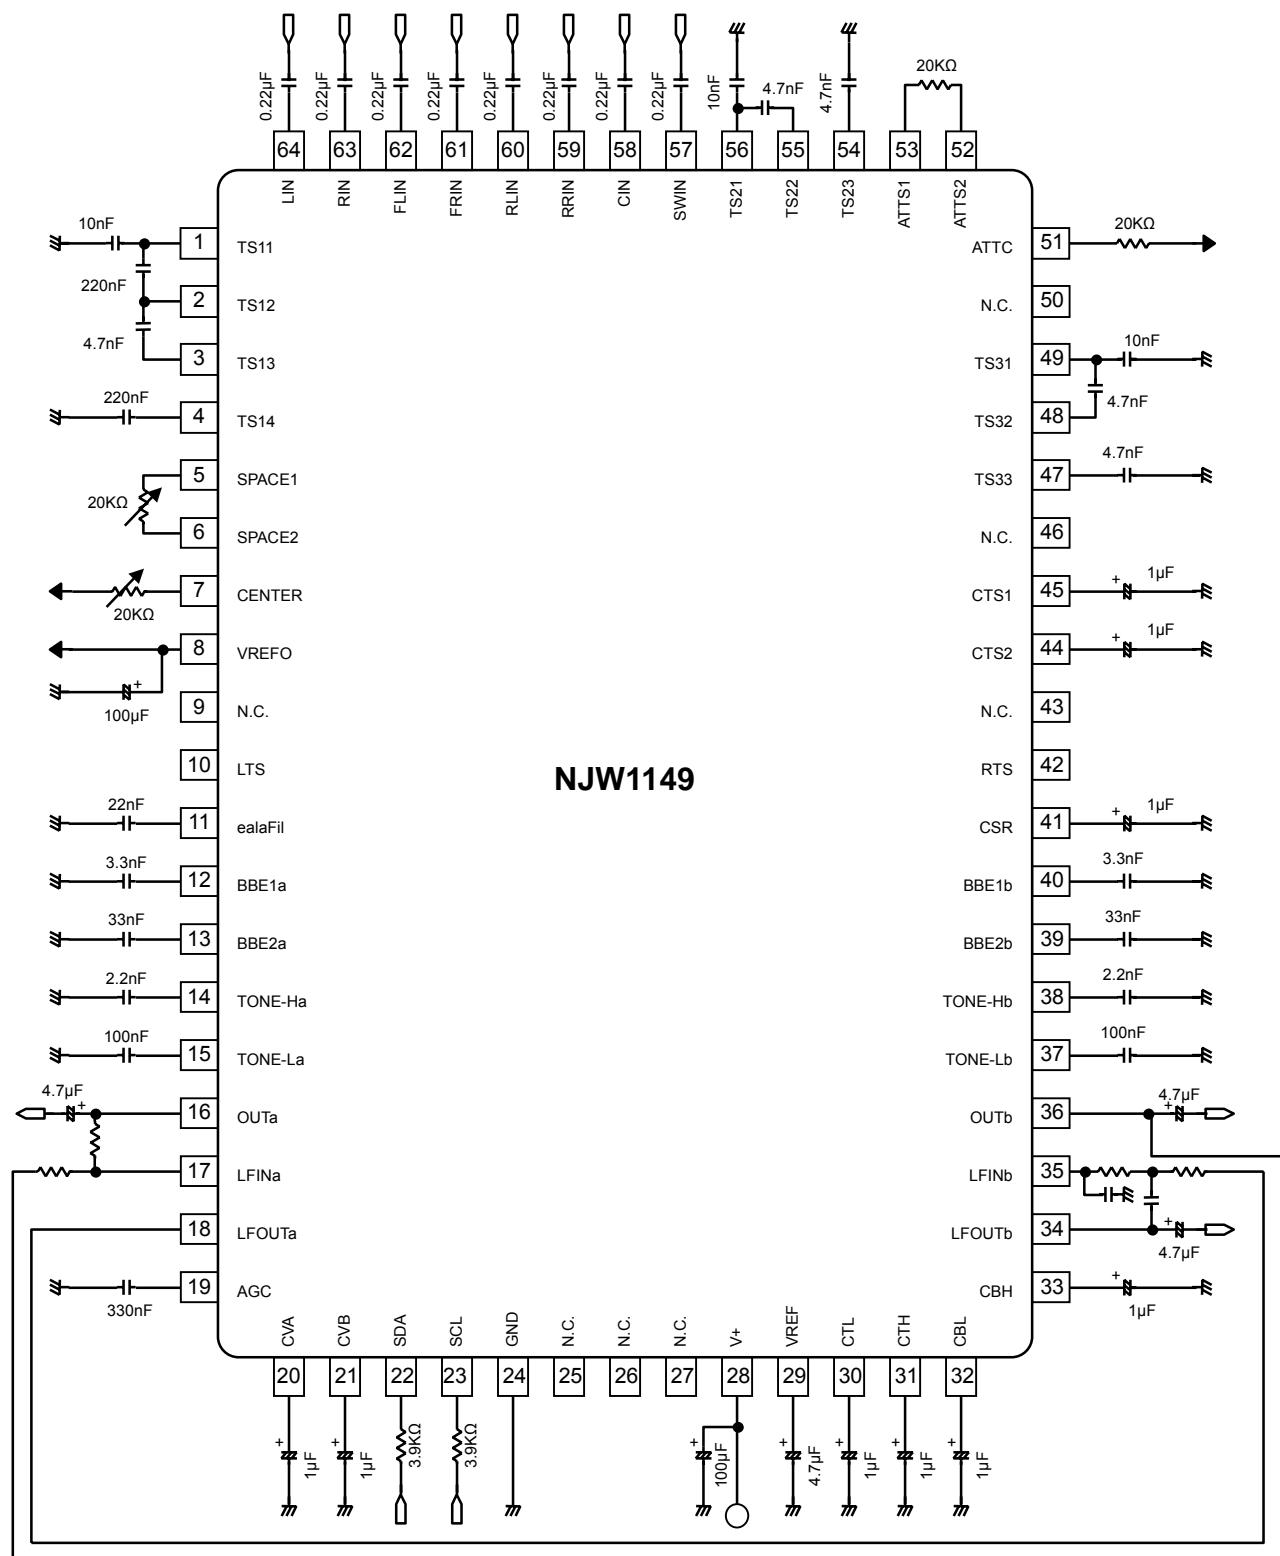■ APPLICATION CIRCUIT 2 (Sub-Woofe output)



< Output Type >

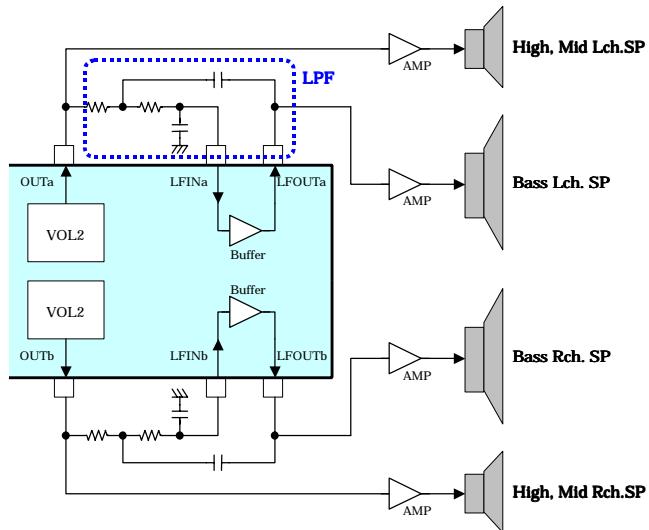


Fig 1. Bi-Amp


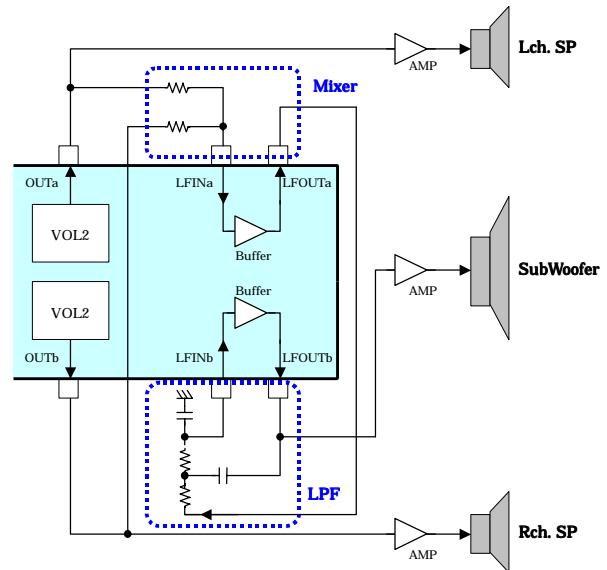


Fig 2. Sub-Woofe

< OUT, LFIN, LFOOUT Low Pass Filter Setting >




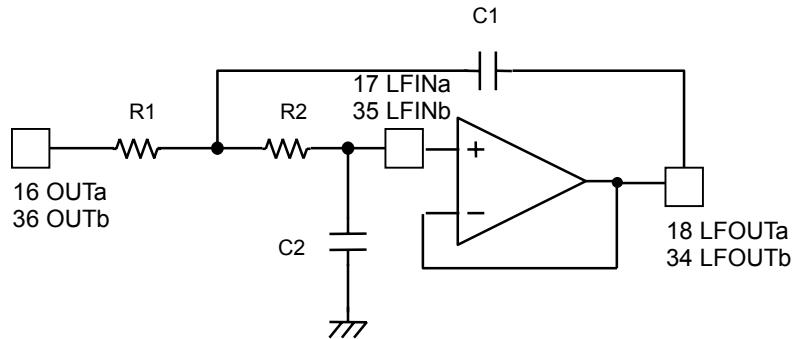
LPF cut off frequency and quality factor are adjusted by the external parts and given by the following functions.










$$f_c = \frac{1}{2\pi\sqrt{R_1 \cdot R_2 \cdot C_1 \cdot C_2}} \text{ (Hz)}$$



$$Q = \sqrt{\frac{C_2 \cdot R_1}{C_1 \cdot R_2}} + \sqrt{\frac{C_1 \cdot R_2}{C_2 \cdot R_1}}$$




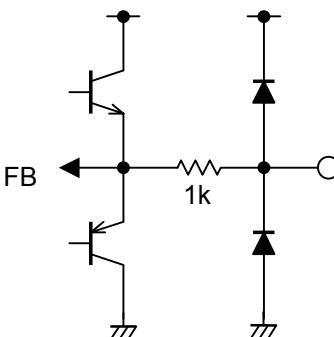
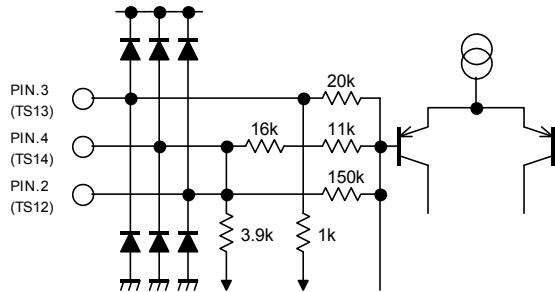
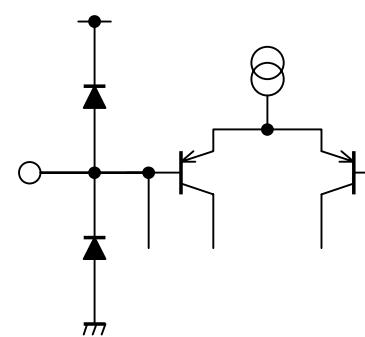
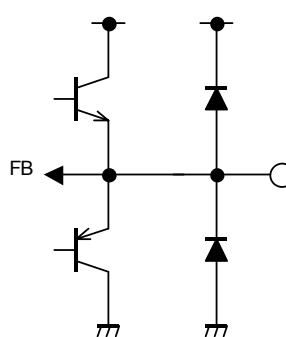
■ TERMINAL DESCRIPTION

| PIN NO. | SYMBOL | FUNCTION | EQUIVALENT CIRCUIT | TERMINAL VOLTAGE |
|---------|--------|------------------------------------|--|------------------|
| 1 | TS11 | TruSurround Filter Capacitor 11 |  | V+/2 |
| 2 | TS12 | TruSurround Filter Capacitor 12 | | |
| 3 | TS13 | TruSurround Filter Capacitor 13 | | |
| 4 | TS14 | TruSurround Filter Capacitor 14 |  | V+/2 |
| 5 | SPACE1 | SPACE Volume1 | | |
| 53 | ATTS1 | Surround Attenuation Resistor 1 |  | V+/2 |
| 6 | SPACE2 | SPACE Volume2 | | |
| 8 | VREFO | Reference Voltage Output Capacitor | | |
| 52 | ATTS2 | Surround Attenuation Resistor 2 |  | V+/2 |
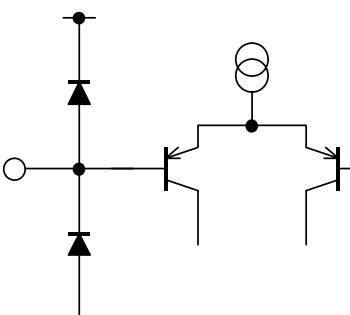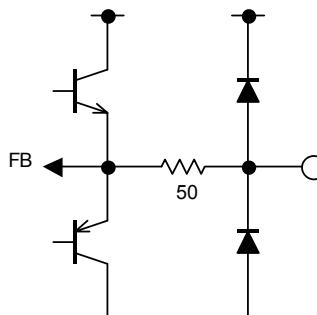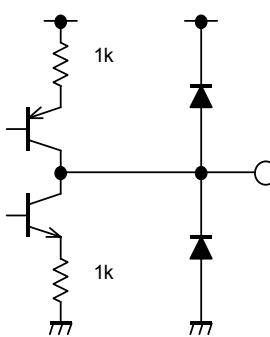
| PIN NO. | SYMBOL | FUNCTION | EQUIVALENT CIRCUIT | TERMINAL VOLTAGE |
|---|--|--|--|------------------|
| 7 11 17 35 51 57 58 59 60 61 62 63 64 | CENTER ealaFil LFINa LFINb ATTC SWIN CIN RRIN RLIN FRIN FLIN RIN LIN | CENTER Volume eala Filter Capacitor Buffer Input for Ach Low Pass Filter Buffer Input for Bch Low Pass Filter Center Attenuation Resistor SW ch Input C ch Input Rear-R ch Input Rear-L ch Input Front-R ch Input Front-L ch Input R ch Input L ch Input |  | V+/2 |
| 9 25 26 27 43 46 50 | N.C. N.C. N.C. N.C. N.C. N.C. N.C. | No Connection No Connection No Connection No Connection No Connection No Connection No Connection | - | - |
| 10 16 18 34 36 42 | LTS OUTa LFOUTa LFOUTb OUTb RTS | Lch TruSurround Output Ach Output Buffer Output for Ach Low Pass Filter Buffer Output for Bch Low Pass Filter Bch Output Rch TruSurround Output |  | V+/2 |
| 12 13 39 40 | BBE1a BBE2a BBE2b BBE1b | Ach BBE High-Pass Filter Capacitor Ach BBE Low-Pass Filter Capacitor Bch BBE Low-Pass Filter Capacitor Bch BBE High-Pass Filter Capacitor |  | V+/2 |
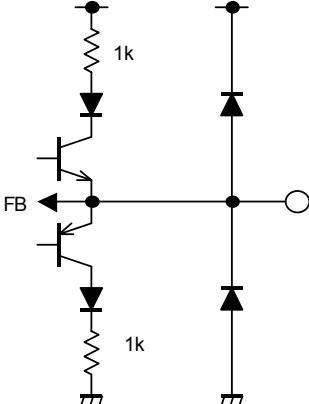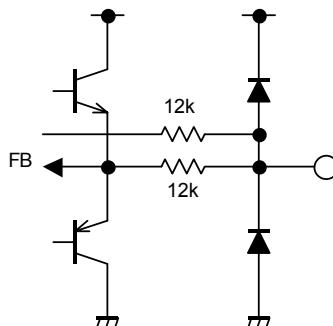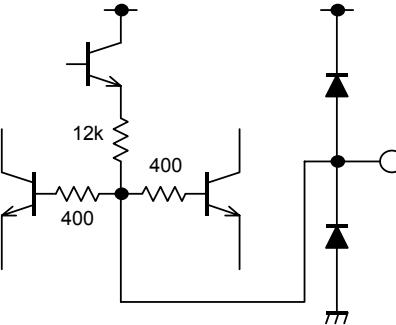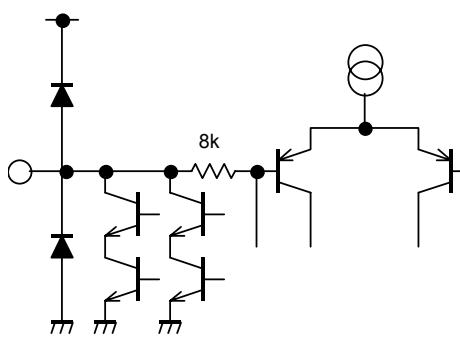
| PIN NO. | SYMBOL | FUNCTION | EQUIVALENT CIRCUIT | TERMINAL VOLTAGE |
|----------|--------------------|--|--|------------------|
| 14 38 | TONE-Ha TONE-Hb | Ach TONE Treble Filter Capacitor Bch TONE Treble Filter Capacitor |  | V+/2 |
| 15 37 | TONE-La TONE-Lb | Ach TONE Bass Filter Capacitor Bch TONE Bass Filter Capacitor |  | V+/2 |
| 19 | AGC | AGC Smoothing Filter Capacitor |  | - |
| 20 21 | CVA CVB | Ach Volume switching noise rejection Capacitor Bch Volume switching noise rejection Capacitor |  | VREF-0.7V |
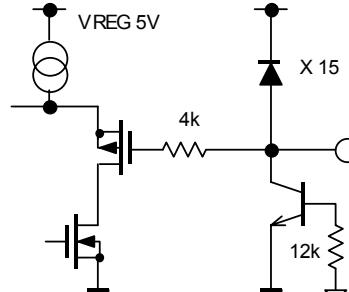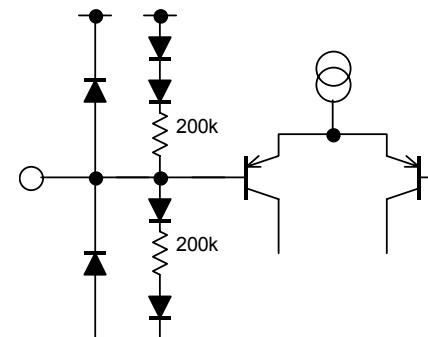
| PIN NO. | SYMBOL | FUNCTION | EQUIVALENT CIRCUIT | TERMINAL VOLTAGE |
|----------|------------|---|--|------------------|
| 22 23 | SDA SCL | I ² C Data Input I ² C Clock Input |  | - |
| 24 | GND | Ground | - | - |
| 28 | V+ | Power Supply | - | V+ |
| 29 | VREF | Reference Voltage Capacitor |  | V+/2 |
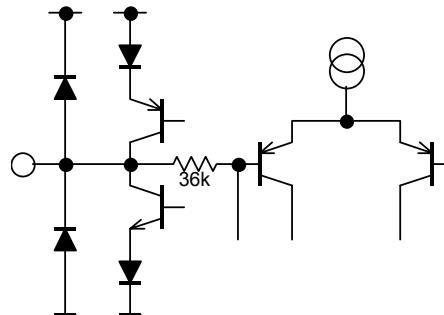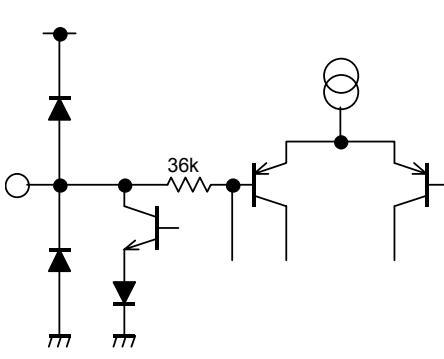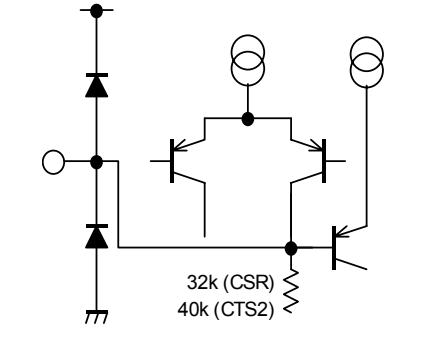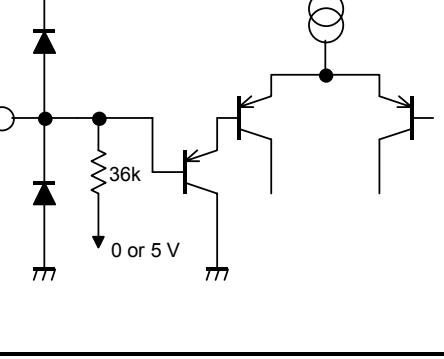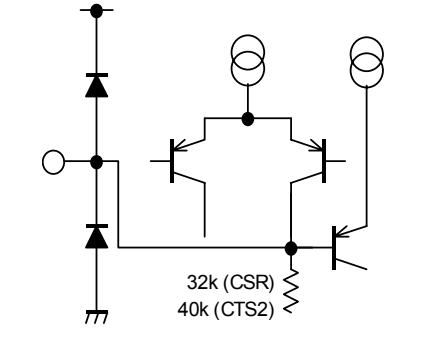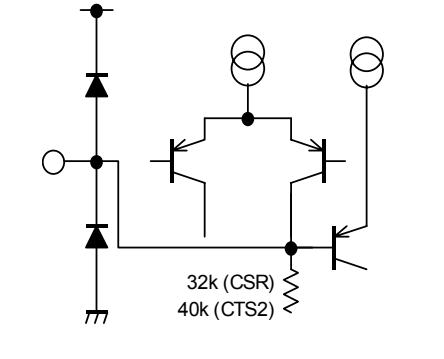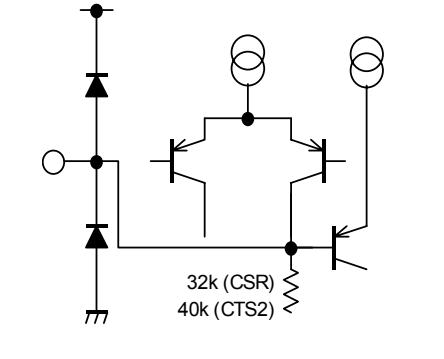
| PIN NO. | SYMBOL | FUNCTION | EQUIVALENT CIRCUIT | TERMINAL VOLTAGE |
|---------|--------|---|--|--------------------------|
| 30 | CTL | Tone Control Bass switching noise rejection Capacitor |  | |
| 31 | CTH | Tone Control Treble switching noise rejection Capacitor |  | VREF-0.7V |
| 32 | CBL | BBE Low switching noise rejection Capacitor |  | |
| 33 | CBH | BBE High switching noise rejection Capacitor |  | VREF-0.7V |
| 41 | CSR | eala switching noise rejection Capacitor |  | |
| 44 | CTS2 | TruSurround switching noise rejection Capacitor 2 |  | 0.54V(CSR) 1.4V(CTS2) |
| 45 | CTS1 | TruSurround switching noise rejection Capacitor 1 |  | - 0 or 5 V |

| PIN NO. | SYMBOL | FUNCTION | EQUIVALENT CIRCUIT | TERMINAL VOLTAGE |
|---------|--------|---------------------------------|--------------------|------------------|
| 47 | TS33 | TruSurround Filter Capacitor 33 | | |
| 48 | TS32 | TruSurround Filter Capacitor 32 | | |
| 49 | TS31 | TruSurround Filter Capacitor 31 | | |
| 54 | TS23 | TruSurround Filter Capacitor 23 | | |
| 55 | TS22 | TruSurround Filter Capacitor 22 | | |
| 56 | TS21 | TruSurround Filter Capacitor 21 | | V+/2 |

■ DEFINITION OF I²C REGISTER

● I²C BUS FORMAT

| S | Slave Address | A | Select Address | A | Data | A | P |
|------|---------------|------|----------------|------|------|------|------|
| 1bit | 8bit | 1bit | 8bit | 1bit | 8bit | 1bit | 1bit |

S: Starting Term

A: Acknowledge Bit

P: Ending Term

● SLAVE ADDRESS

| MSB | 1 | 0 | 0 | 0 | 0 | 1 | 0 | LSB |
|-----|---|---|---|---|---|---|---|-----|
| | | | | | | | | |

● CONTROL REGISTER TABLE

The select address sets each function (Volume, Balance, AGC, Surround, BBE, Tone Control).

The auto-increment function cycles the select address as follows.

00H→01H→02H→03H→04H→05H→06H→00H

| Select Address | BIT | | | | | | | |
|----------------|------|------|---------|----|----|-----|------------|------------|
| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 00H | VOL | | | | | | | |
| 01H | CHS | BAL | | | | | | Don't Care |
| 02H | BCB | BASS | | | | | | Don't Care |
| 03H | BCT | TREB | | | | | | Don't Care |
| 04H | BBEL | | | | | BBE | Don't Care | |
| 05H | BBEH | | | | | AGC | AGC LVL | |
| 06H | eala | | TS MODE | | | | | Don't Care |

● CONTROL REGISTER DEFAULT VALUE

Control register default value is all "0".

| Select Address | BIT | | | | | | | |
|----------------|-----|----|----|----|----|----|----|----|
| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 00H | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 01H | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 02H | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 03H | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 04H | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 05H | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 06H | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

● CONTROL COMMAND TABLE

a) Master Volume

| Select Address | BIT | | | | | | | |
|----------------|-----|----|----|----|----|----|----|----|
| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 00H | VOL | | | | | | | |

•VOL : Master Volume

Attenuation level : 0 to -80dB(0.33dB/step), MUTE

The volume is consisted of VOL1 and VOL2 and the level is divided into half to each VOL1 and VOL2.

ex) Volume setting is -2dB ; VOL1 and VOL2 is set -1dB each.

b) Balance

| Select Address | BIT | | | | | | | |
|----------------|-----|-----|----|----|----|----|----|------------|
| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 01H | CHS | BAL | | | | | | Don't Care |

•CHS : Balance channel select

"0" : Ach "Bch is attenuated"

"1" : Bch "Ach is attenuated"

•BAL : Ach and Bch Balance

Balance Level : 0 to -30dB (1dB/Step) , MUTE

c) Tone Control BASS

| Select Address | BIT | | | | | | | |
|----------------|-----|------|----|----|----|----|----|------------|
| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 03H | BCB | BASS | | | | | | Don't Care |

•BCB : Bass Boost or Cut

"0" : Cut

"1" : Boost

•BASS : BASS Level

Cut Level : -15 to 0dB(0.5dB/Step)

Boost Level : 0 to +15dB(0.5dB/Step)

e) Tone Control TREBLE

| Select Address | BIT | | | | | | | |
|----------------|-----|------|----|----|----|----|----|------------|
| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 04H | BCT | TREB | | | | | | Don't Care |

•BCT : Treble Boost or Cut

"0" : Cut

"1" : Boost

•TREB : Treble Level

Cut Level : -15 to 0dB(0.5dB/Step)

Boost Level : 0 to +15dB(0.5dB/Step)

f) BBE-Low

| Select Address | BIT | | | | | | | |
|----------------|------|----|----|----|----|----|-----|------------|
| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 05H | BBEL | | | | | | BBE | Don't Care |

•BBEL:BBE-LOW Level

0dB to 15dB (0.5dB/step)

All bit "0"(00H)= BBE OFF

•BBE : BBE ON or OFF

g) BBE-High

| Select Address | BIT | | | | | | | |
|----------------|------|----|----|----|----|-----|---------|----|
| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 05H | BBEH | | | | | AGC | AGC LVL | |

•BBEH: BBE-HIGH Level

0dB to 15dB (0.5dB/step)

All bit "0"(00H)= BBE OFF

•AGC : AGC ON or OFF

•AGC LVL : AGC Level

300mVrms, 400mVrms, 500mVrms, 600mVrms

h) Surround (eala, TruSurround)

| Select Address | BIT | | | | | | | |
|----------------|------|----|---------|----|----|----|----|------------|
| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 06H | eala | | TS MODE | | | | | Don't Care |

•eala : eala mode

Surround effect small (SR1), large (SR2), Simulated Stereo (SIM), By-Pass

•TS MODE : TruSurround mode

By-Pass, SRS 3D, TS2ch (Passive Matrix TruSurround), TS4ch (for Dolby Pro Logic),
TS5.1ch (for Dolby Digital), Mix Down

■ Master Volume (Select Address: 00H)

| | | VOL | | | | | | | |
|----------|-----|-----|----|----|----|----|----|----|----|
| Gain(dB) | HEX | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 0 | FF | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| -1 | FC | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 |
| -2 | F9 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 1 |
| -3 | F6 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 0 |
| -4 | F3 | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 1 |
| -5 | F0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 |
| -6 | ED | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 1 |
| -7 | EA | 1 | 1 | 1 | 0 | 1 | 0 | 1 | 0 |
| -8 | E7 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | 1 |
| -9 | E4 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 0 |
| -10 | E1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 1 |
| -11 | DE | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 0 |
| -12 | DB | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 |
| -13 | D8 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 0 |
| -14 | D5 | 1 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| -15 | D2 | 1 | 1 | 0 | 1 | 0 | 0 | 1 | 0 |
| -16 | CF | 1 | 1 | 0 | 0 | 1 | 1 | 1 | 1 |
| -17 | CC | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 |
| -18 | C9 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 1 |
| -19 | C6 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | 0 |
| -20 | C3 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 |
| -21 | C0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| -22 | BD | 1 | 0 | 1 | 1 | 1 | 1 | 0 | 1 |
| -23 | BA | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 0 |
| -24 | B7 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 1 |
| -25 | B4 | 1 | 0 | 1 | 1 | 0 | 1 | 0 | 0 |
| -26 | B1 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 1 |
| -27 | AE | 1 | 0 | 1 | 0 | 1 | 1 | 1 | 0 |
| -28 | AB | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 1 |
| -29 | A8 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 0 |
| -30 | A5 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 1 |
| -31 | A2 | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 0 |
| -32 | 9F | 1 | 0 | 0 | 1 | 1 | 1 | 1 | 1 |
| -33 | 9C | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 0 |
| -34 | 99 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 |
| -35 | 96 | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 0 |
| -36 | 93 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 1 |
| -37 | 90 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |
| -38 | 8D | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 1 |
| -39 | 8A | 1 | 0 | 0 | 0 | 1 | 0 | 1 | 0 |
| -40 | 87 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 |
| -41 | 84 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| -42 | 81 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

| | | VOL | | | | | | | |
|----------|-----|-----|----|----|----|----|----|----|----|
| Gain(dB) | HEX | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| -43 | 7E | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 |
| -44 | 7B | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 1 |
| -45 | 78 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 |
| -46 | 75 | 0 | 1 | 1 | 1 | 0 | 1 | 0 | 1 |
| -47 | 72 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 0 |
| -48 | 6F | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 1 |
| -49 | 6C | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 |
| -50 | 69 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 1 |
| -51 | 66 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 |
| -52 | 63 | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 1 |
| -53 | 60 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |
| -54 | 5D | 0 | 1 | 0 | 1 | 1 | 1 | 0 | 1 |
| -55 | 5A | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 0 |
| -56 | 57 | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 1 |
| -57 | 54 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 0 |
| -58 | 51 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 1 |
| -59 | 4E | 0 | 1 | 0 | 0 | 1 | 1 | 1 | 0 |
| -60 | 4B | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 1 |
| -61 | 48 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 |
| -62 | 45 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 1 |
| -63 | 42 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 |
| -64 | 3F | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| -65 | 3C | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 |
| -66 | 39 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 1 |
| -67 | 36 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 0 |
| -68 | 33 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 |
| -69 | 30 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 |
| -70 | 2D | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 1 |
| -71 | 2A | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| -72 | 27 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 1 |
| -73 | 24 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 |
| -74 | 21 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 |
| -75 | 1E | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 |
| -76 | 1B | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 1 |
| -77 | 18 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| -78 | 15 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 1 |
| -79 | 12 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 0 |
| -80 | 0F | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| Mute | 00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

■ Balance (Select Address: 01H)

| Channel Setting (CHS) | D7 |
|-----------------------|----|
| Attenuated Bch Gain | 0 |
| Attenuated Ach Gain | 1 |

| Gain(dB) | BAL | | | | |
|----------|-----|----|----|----|----|
| | D6 | D5 | D4 | D3 | D2 |
| 0 | 0 | 0 | 0 | 0 | 0 |
| -1 | 0 | 0 | 0 | 0 | 1 |
| -2 | 0 | 0 | 0 | 1 | 0 |
| -3 | 0 | 0 | 0 | 1 | 1 |
| -4 | 0 | 0 | 1 | 0 | 0 |
| -5 | 0 | 0 | 1 | 0 | 1 |
| -6 | 0 | 0 | 1 | 1 | 0 |
| -7 | 0 | 0 | 1 | 1 | 1 |
| -8 | 0 | 1 | 0 | 0 | 0 |
| -9 | 0 | 1 | 0 | 0 | 1 |
| -10 | 0 | 1 | 0 | 1 | 0 |
| -11 | 0 | 1 | 0 | 1 | 1 |
| -12 | 0 | 1 | 1 | 0 | 0 |
| -13 | 0 | 1 | 1 | 0 | 1 |
| -14 | 0 | 1 | 1 | 1 | 0 |
| -15 | 0 | 1 | 1 | 1 | 1 |
| -16 | 1 | 0 | 0 | 0 | 0 |
| -17 | 1 | 0 | 0 | 0 | 1 |
| -18 | 1 | 0 | 0 | 1 | 0 |
| -19 | 1 | 0 | 0 | 1 | 1 |
| -20 | 1 | 0 | 1 | 0 | 0 |
| -21 | 1 | 0 | 1 | 0 | 1 |
| -22 | 1 | 0 | 1 | 1 | 0 |
| -23 | 1 | 0 | 1 | 1 | 1 |
| -24 | 1 | 1 | 0 | 0 | 0 |
| -25 | 1 | 1 | 0 | 0 | 1 |
| -26 | 1 | 1 | 0 | 1 | 0 |
| -27 | 1 | 1 | 0 | 1 | 1 |
| -28 | 1 | 1 | 1 | 0 | 0 |
| -29 | 1 | 1 | 1 | 0 | 1 |
| -30 | 1 | 1 | 1 | 1 | 0 |
| MUTE | 1 | 1 | 1 | 1 | 1 |

■ Tone Control Bass (Select Address: 02H)

| | |
|--------------|-----|
| Bass | BCB |
| Cut or Boost | D7 |
| Cut | 0 |
| Boost | 1 |

| Cut Gain(dB) | Boost Gain(dB) | BASS | | | | |
|--------------|----------------|------|----|----|----|----|
| | | D6 | D5 | D4 | D3 | D2 |
| -15 | 15 | 1 | 1 | 1 | 1 | 0 |
| -14 | 14 | 1 | 1 | 1 | 0 | 0 |
| -13 | 13 | 1 | 1 | 0 | 1 | 0 |
| -12 | 12 | 1 | 1 | 0 | 0 | 0 |
| -11 | 11 | 1 | 0 | 1 | 1 | 0 |
| -10 | 10 | 1 | 0 | 1 | 0 | 0 |
| -9 | 9 | 1 | 0 | 0 | 1 | 0 |
| -8 | 8 | 1 | 0 | 0 | 0 | 0 |
| -7 | 7 | 0 | 1 | 1 | 1 | 0 |
| -6 | 6 | 0 | 1 | 1 | 0 | 0 |
| -5 | 5 | 0 | 1 | 0 | 1 | 0 |
| -4 | 4 | 0 | 1 | 0 | 0 | 0 |
| -3 | 3 | 0 | 0 | 1 | 1 | 0 |
| -2 | 2 | 0 | 0 | 1 | 0 | 0 |
| -1 | 1 | 0 | 0 | 0 | 1 | 0 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 |

■ Tone Control Treble (Select Address: 03H)

| | |
|--------------|-----|
| Treble | BCT |
| Cut or Boost | D7 |
| Cut | 0 |
| Boost | 1 |

| Cut Gain(dB) | Boost Gain(dB) | TREB | | | | |
|--------------|----------------|------|----|----|----|----|
| | | D6 | D5 | D4 | D3 | D2 |
| -15 | 15 | 1 | 1 | 1 | 1 | 0 |
| -14 | 14 | 1 | 1 | 1 | 0 | 0 |
| -13 | 13 | 1 | 1 | 0 | 1 | 0 |
| -12 | 12 | 1 | 1 | 0 | 0 | 0 |
| -11 | 11 | 1 | 0 | 1 | 1 | 0 |
| -10 | 10 | 1 | 0 | 1 | 0 | 0 |
| -9 | 9 | 1 | 0 | 0 | 1 | 0 |
| -8 | 8 | 1 | 0 | 0 | 0 | 0 |
| -7 | 7 | 0 | 1 | 1 | 1 | 0 |
| -6 | 6 | 0 | 1 | 1 | 0 | 0 |
| -5 | 5 | 0 | 1 | 0 | 1 | 0 |
| -4 | 4 | 0 | 1 | 0 | 0 | 0 |
| -3 | 3 | 0 | 0 | 1 | 1 | 0 |
| -2 | 2 | 0 | 0 | 1 | 0 | 0 |
| -1 | 1 | 0 | 0 | 0 | 1 | 0 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 |

■ BBE-LOW Gain Code (Select Address: 04H)

| Gain(dB) | BBEL | | | | |
|----------|------|----|----|----|----|
| | D7 | D6 | D5 | D4 | D3 |
| 15 | 1 | 1 | 1 | 1 | 0 |
| 14 | 1 | 1 | 1 | 0 | 0 |
| 13 | 1 | 1 | 0 | 1 | 0 |
| 12 | 1 | 1 | 0 | 0 | 0 |
| 11 | 1 | 0 | 1 | 1 | 0 |
| 10 | 1 | 0 | 1 | 0 | 0 |
| 9 | 1 | 0 | 0 | 1 | 0 |
| 8 | 1 | 0 | 0 | 0 | 0 |
| 7 | 0 | 1 | 1 | 1 | 0 |
| 6 | 0 | 1 | 1 | 0 | 0 |
| 5 | 0 | 1 | 0 | 1 | 0 |
| 4 | 0 | 1 | 0 | 0 | 0 |
| 3 | 0 | 0 | 1 | 1 | 0 |
| 2 | 0 | 0 | 1 | 0 | 0 |
| 1 | 0 | 0 | 0 | 1 | 0 |
| 0 | 0 | 0 | 0 | 0 | 0 |

■ BBE (Select Address: 04H)

| BBE ON/OFF | BBE |
|------------|-----|
| | D2 |
| OFF | 0 |
| ON | 1 |

■ BBE-HIGH Gain Code (Select Address: 05H)

| Gain(dB) | BBEH | | | | |
|----------|------|----|----|----|----|
| | D7 | D6 | D5 | D4 | D3 |
| 15 | 1 | 1 | 1 | 1 | 0 |
| 14 | 1 | 1 | 1 | 0 | 0 |
| 13 | 1 | 1 | 0 | 1 | 0 |
| 12 | 1 | 1 | 0 | 0 | 0 |
| 11 | 1 | 0 | 1 | 1 | 0 |
| 10 | 1 | 0 | 1 | 0 | 0 |
| 9 | 1 | 0 | 0 | 1 | 0 |
| 8 | 1 | 0 | 0 | 0 | 0 |
| 7 | 0 | 1 | 1 | 1 | 0 |
| 6 | 0 | 1 | 1 | 0 | 0 |
| 5 | 0 | 1 | 0 | 1 | 0 |
| 4 | 0 | 1 | 0 | 0 | 0 |
| 3 | 0 | 0 | 1 | 1 | 0 |
| 2 | 0 | 0 | 1 | 0 | 0 |
| 1 | 0 | 0 | 0 | 1 | 0 |
| 0 | 0 | 0 | 0 | 0 | 0 |

■ AGC (Select Address: 05H)

| | |
|------------|-----|
| AGC ON/OFF | AGC |
| | D2 |
| OFF | 0 |
| ON | 1 |

■ AGC Level (Select Address: 05H)

| AGC Level | AGC LVL | |
|-----------|---------|----|
| | D1 | D0 |
| 300mVrms | 0 | 0 |
| 400mVrms | 0 | 1 |
| 500mVrms | 1 | 0 |
| 600mVrms | 1 | 1 |

■ eala mode (Select Address: 06H)


| eala MODE | eala | |
|------------------|------|----|
| | D7 | D6 |
| By-Pass | 0 | 0 |
| Simulated Stereo | 0 | 1 |
| 3D Effect Large | 1 | 0 |
| 3D Effect Small | 1 | 1 |

■ TruSurround mode(Select Address: 06H)


| TruSurround MODE | TS MODE | | | |
|---------------------|---------|----|----|----|
| | D5 | D4 | D3 | D2 |
| By-Pass | 0 | 0 | 0 | 0 |
| SRS 3D | 0 | 0 | 1 | 1 |
| TS2ch | 0 | 1 | 0 | 1 |
| TS4ch | 1 | 0 | 0 | 0 |
| TS5.1ch | 1 | 1 | 0 | 0 |
| Mix Down | 1 | 1 | 1 | 0 |

■ TruSurround Input Signal Root

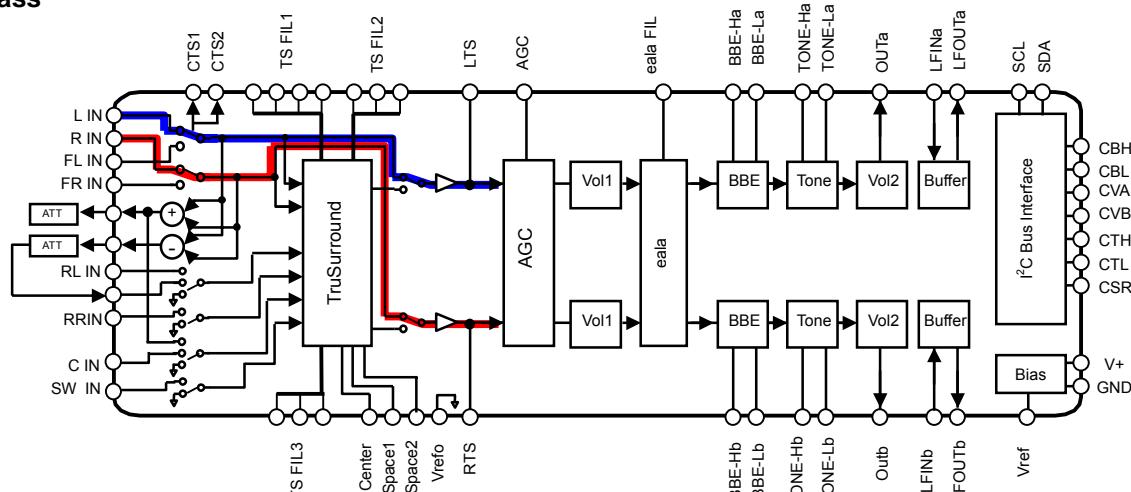
● By-Pass




● SRS 3D

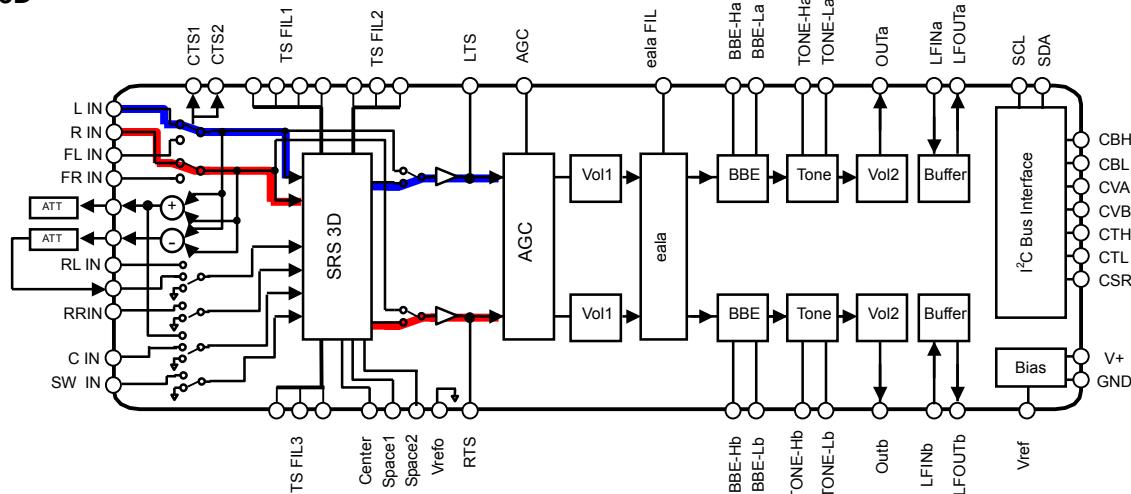


● TS 2ch

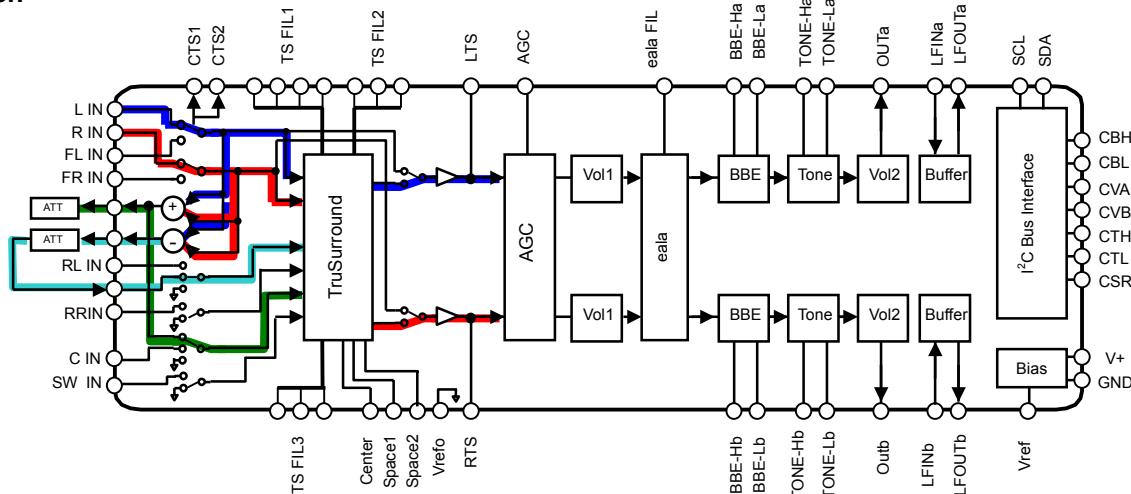


● TS 4ch

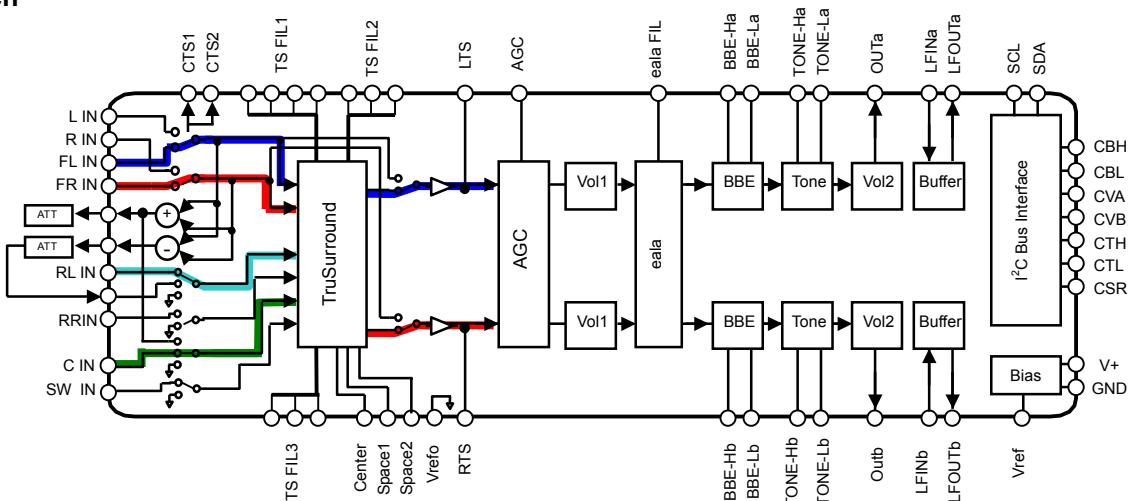

● TS 5.1ch

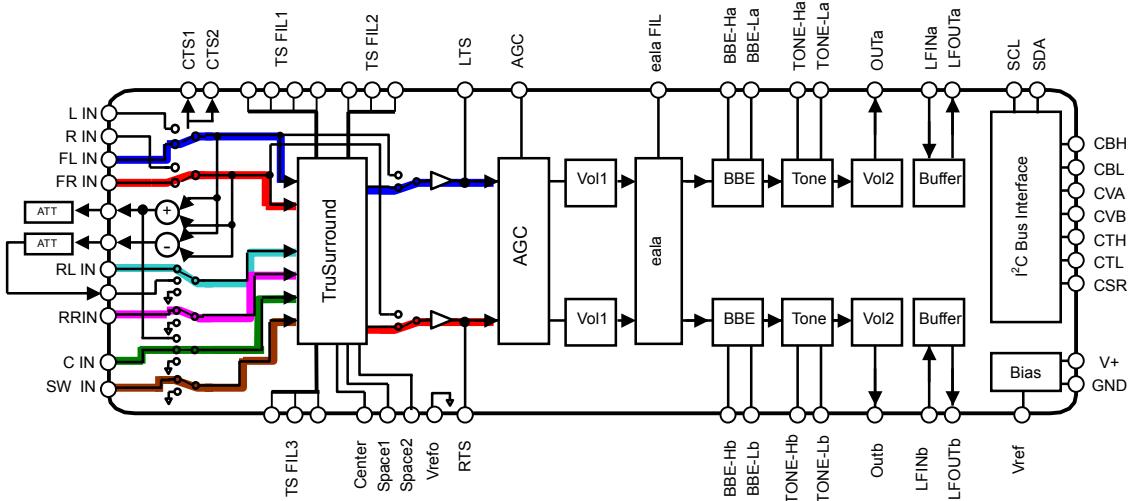

● Mix Down

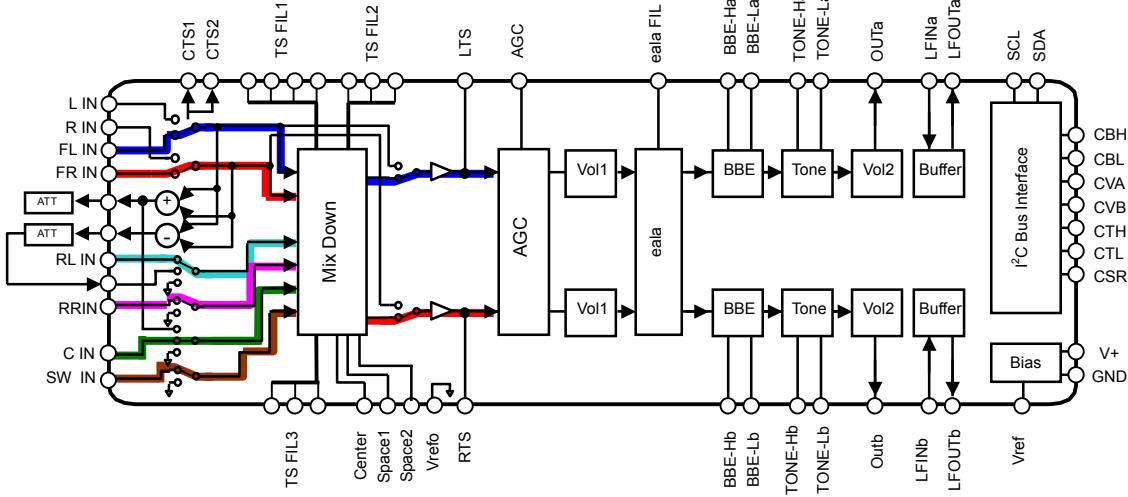

■NOTE

The **NJW1149** is manufactured by New Japan Radio Co., Ltd. under license from BBE Sound Inc. BBE is a registered trademark of BBE Sound Inc. A license from BBE Sound Inc. is required before the **NJW1149** can be purchased from New Japan Radio Co.,Ltd.

BBE Sound, Inc.
5381 Production Drive
Huntington Beach, CA 92649
Tel:(714) 897-6766
Fax:(714) 896-0736

The TruSurround technology right incorporated in the **NJW1149** are owned by SRS Labs, a U.S. Corporation and licensed to New Japan Radio Co., Ltd. Purchaser of **NJW1149** must sign a license for use of the chip and display of the SRS Labs trademarks. Any products incorporating the **NJW1149** must be sent to SRS Labs for review. TruSurround is protected under U.S. and foreign patents issued and/or pending. TruSurround, SRS and the  symbol are trademarks of SRS Labs, Inc. in the United States and selected foreign countries. Neither the purchase of the **NJW1149**, nor the corresponding sale of audio enhancement equipment conveys the right to sell commercialized recordings made with any SRS technology.

SRS Labs requires all set makers to comply with all rules and regulations as outlined in the SRS Trademark Usage Manual separately provided.

For further information, please contact:
SRS Labs, Inc.
2909 Daimler Street. Santa Ana, CA 92705 USA
Tel: 949-442-1070 Fax: 949-852-1099 <http://www.srslabs.com>

Purchase of I²C components of New Japan Radio Co., Ltd or one of its sublicensed Associated Companies conveys a license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.

[CAUTION]
The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.