



# FSEZ1216 — Primary-Side-Regulation PWM Integrated Power MOSFET

## Features

- Constant-Voltage (CV) and Constant-Current (CC) Control without Secondary-Feedback Circuitry
- Green Mode: Frequency Reduction at Light-Load
- Fixed PWM Frequency at 42kHz with Frequency Hopping to Reduce EMI
- Cable Voltage Drop Compensation in CV Mode
- Low Startup Current: 10μA
- Low Operating Current: 3.5mA
- Peak-Current-Mode Control in CV Mode
- Cycle-by-Cycle Current Limiting
- V<sub>DD</sub> Over-Voltage Protection with Auto-Restart
- V<sub>DD</sub> Under-Voltage Lockout (UVLO)
- Gate Output Maximum Voltage Clamped at 18V
- Fixed Over-Temperature Protection with Latch
- DIP-8 Package Available

## Applications

- Battery Chargers for Cellular Phones, Cordless Phones, PDA, Digital Cameras, Power Tools
- Replaces Linear Transformer and RCC SMPS
- Offline High Brightness (HB) LED Drivers

## Description

The primary-side PWM integrated Power MOSFET, FSEZ1216, significantly simplifies power supply design that requires CV and CC regulation capabilities. FSEZ1216 controls the output voltage and current precisely only with the information in the primary side of the power supply, not only removing the output current sensing loss, but also eliminating all secondary feedback circuitry.

The green-mode function with a low startup current (10μA) maximizes the light load efficiency so the power supply can meet stringent standby power regulations.

Compared with conventional secondary side regulation approach, the FSEZ1216 can reduce total cost, component count, size, and weight, while simultaneously increasing efficiency, productivity, and system reliability.

A typical output CV/CC characteristic envelope is shown in Figure 1.

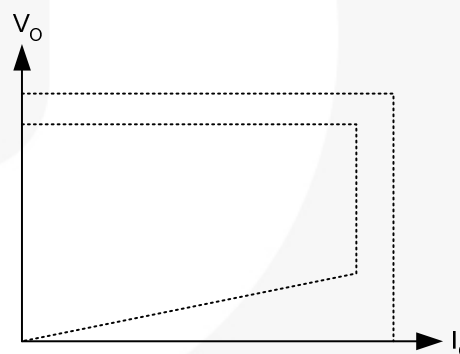


Figure 1. Typical Output V-I Characteristic


## Ordering Information

Part Number	Operating Temperature Range	MOSFET BV <sub>DSS</sub>	MOSFET R <sub>DS,ON</sub>	Eco Status	Package	Packing Method
FSEZ1216NY	-40°C to +105°C	600V	9.3Ω (Typical)	Green	8-Lead, Dual Inline Package (DIP-8)	Tube

For Fairchild's definition of Eco Status, please visit: [http://www.fairchildsemi.com/company/green/rohs\\_green.html](http://www.fairchildsemi.com/company/green/rohs_green.html).



## Marking Information

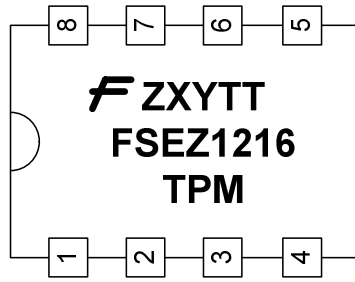

F- Fairchild Logo  
 Z- Plant Code  
 X- 1-Digit Year Code  
 Y- 1-Digit Week Code  
 TT- 2-Digits Die Run Code  
 T- Package Type (N=DIP)  
 P- Z: Pb Free, Y: Green Package  
 M- Manufacture Flow Code

Figure 4. Top Mark

## Pin Configuration

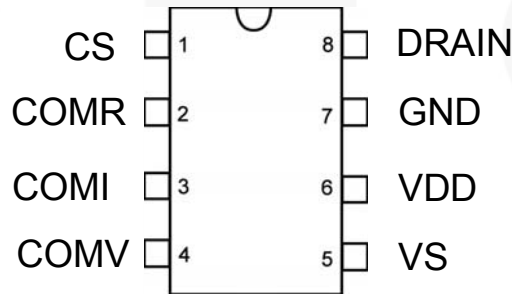


Figure 5. Pin Configuration

## Pin Definitions

Pin #	Name	Description
1	CS	<b>Current Sense.</b> This pin connects a current-sense resistor to sense the MOSFET current for peak-current-mode control in CV mode and provides for output-current regulation in CC mode.
2	COMR	<b>Cable Compensation.</b> This pin connects a capacitor between COMR and GND for compensation voltage drop due to output cable loss in CV mode.
3	COMI	<b>Constant Current Loop Compensation.</b> This pin connects a capacitor and a resistor between COMI and GND for compensation current loop gain.
4	COMV	<b>Constant Voltage Loop Compensation.</b> This pin connects a capacitor and a resistor between COMV and GND for compensation voltage loop gain.
5	VS	<b>Voltage Sense.</b> This pin detects the output voltage information and discharge time based on voltage of auxiliary winding. This pin connects two divider resistors and one capacitor.
6	VDD	<b>Power Supply.</b> The power supply pin for the IC operating current and MOSFET driving current. This pin is connects to an external $V_{DD}$ capacitor (typically 10 $\mu$ F). The threshold voltages for startup and turn-off are 16V and 5V, respectively.
7	GND	<b>Ground.</b>
8	DRAIN	<b>Drain.</b> This pin is the high-voltage power MOSFET drain.

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Min.	Max.	Unit
V <sub>VDD</sub>	DC Supply Voltage <sup>(1)</sup>		30	V
V <sub>VS</sub>	VS Pin Input Voltage	-0.3	7.0	V
V <sub>CS</sub>	CS Pin Input Voltage	-0.3	7.0	V
V <sub>COMV</sub>	Voltage Error Amplifier Output Voltage	-0.3	7.0	V
V <sub>COMI</sub>	Voltage Error Amplifier Output Voltage	-0.3	7.0	V
V <sub>DS</sub>	Drain-Source Voltage		600	V
I <sub>D</sub>	Continuous Drain Current	T <sub>C</sub> =25°C	1.0	A
		T <sub>C</sub> =100°C	0.6	
I <sub>DM</sub>	Pulsed Drain Current		4	A
E <sub>AS</sub>	Single Pulse Avalanche Energy		33	mJ
I <sub>AR</sub>	Avalanche Current		1	A
P <sub>D</sub>	Power Dissipation (T <sub>A</sub> < 50°C)		800	mW
θ <sub>JA</sub>	Thermal Resistance Junction-to-Air		113	°C/W
θ <sub>JC</sub>	Thermal Resistance Junction-to-Case		67	°C/W
T <sub>J</sub>	Operating Junction Temperature		+150	°C
T <sub>STG</sub>	Storage Temperature Range	-55	+150	°C
T <sub>L</sub>	Lead Temperature (Wave Soldering or IR, 10 Seconds)		+260	°C
ESD	Electrostatic Discharge Capability, Human Body Model, JEDEC: JESD22-A114		2.5	KV
	Electrostatic Discharge Capability, Charged Device Model, JEDEC: JESD22-C101		1250	V

### Note:

- All voltage values, except differential voltages, are given with respect to GND pin.

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
T <sub>A</sub>	Operating Ambient Temperature		-40		+105	°C

## Electrical Characteristics

$V_{DD}=15V$  and  $T_A=25^\circ C$  unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units	
<b>V<sub>DD</sub> Section</b>							
V <sub>OP</sub>	Continuously Operating Voltage				25	V	
V <sub>DD-ON</sub>	Turn-On Threshold Voltage		15	16	17	V	
V <sub>DD-OFF</sub>	Turn-Off Threshold Voltage		4.5	5.0	5.5	V	
I <sub>DD-ST</sub>	Startup Current	$0 < V_{DD} < V_{DD-ON} - 0.16V$	0	1.6	10.0	μA	
I <sub>DD-OP</sub>	Operating Current	$V_{DD}=20V, f_S=f_{OSC}, V_{VS}=2V, V_{CS}=3V, C_L=1nF$		3.5	5.0	mA	
I <sub>DD-GREEN</sub>	Green Mode Operating Supply Current	$V_{DD}=20V, V_{VS}=2.7V, f_S=f_{OSC-N-MIN}, V_{CS}=0V, C_L=1nF, V_{COMV}=0V$		1	2	mA	
V <sub>DD-OVP</sub>	V <sub>DD</sub> Over-Voltage Protection Level	$V_{CS}=3V, V_{VS}=2.3V,$	27	28	29	V	
t <sub>D-VDDOVP</sub>	V <sub>DD</sub> Over-Voltage Protection Debounce Time	$f_S=f_{OSC}, V_{VS}=2.3V$	100	250	400	μs	
<b>Oscillator Section</b>							
f <sub>OSC</sub>	Frequency	Center Frequency	$T_A=25^\circ C$	39	42	45	KHz
		Frequency Hopping Range	$T_A=25^\circ C$	±1.8	±2.6	±3.6	
t <sub>FHR</sub>	Frequency Hopping Period	$T_A=25^\circ C$		3		ms	
f <sub>OSC-N-MIN</sub>	Minimum Frequency at No Load	$V_{VS}=2.7V, V_{COMV}=0V$		550		Hz	
f <sub>OSC-CM-MIN</sub>	Minimum Frequency at CCM	$V_{VS}=2.3V, V_{CS}=0.5V$		20		KHz	
f <sub>DV</sub>	Frequency Variation vs. V <sub>DD</sub> Deviation	$V_{DD}=10V$ to $25V$			5	%	
f <sub>DT</sub>	Frequency Variation vs. Temperature Deviation	$T_A=-40^\circ C$ to $+85^\circ C$			15	%	
<b>Voltage-Sense Section</b>							
I <sub>VS-UVP</sub>	Sink Current for Brownout Protection	$R_{VS}=20K\Omega$		180		μA	
I <sub>tc</sub>	IC Compensation Bias Current			9.5		μA	
V <sub>BIAS-COMV</sub>	Adaptive Bias Voltage Dominated by V <sub>COMV</sub>	$V_{COMV}=0V, T_A=25^\circ C, R_{VS}=20K\Omega$		1.4		V	
<b>Current-Sense Section</b>							
t <sub>PD</sub>	Propagation Delay to GATE Output			100	200	ns	
t <sub>MIN-N</sub>	Minimum On Time at No Load	$V_{VS}=-0.8V, R_S=2K\Omega, V_{COMV}=1V$		1100		ns	
t <sub>MINCC</sub>	Minimum On Time in CC Mode	$V_{VS}=0V, V_{COMV}=2V$		400		ns	
D <sub>SAW</sub>	Duty Cycle of SAW Limiter			40		%	
V <sub>TH</sub>	Threshold Voltage for Current Limit			1.3		V	

Continued on following page...

## Electrical Characteristics


$V_{DD}=15V$  and  $T_A=25^{\circ}C$  unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
<b>Voltage-Error-Amplifier Section</b>						
$V_{VR}$	Reference Voltage		2.475	2.500	2.525	V
$V_N$	Green Mode Starting Voltage on COMV Pin	$f_S=f_{OSC}=2KHz, V_{VS}=2.3V$		2.8		V
$V_G$	Green Mode Ending Voltage on COMV Pin	$f_S=1KHz$		0.8		V
$I_{V-SINK}$	Output Sink Current	$V_{VS}=3V, V_{COMV}=2.5V$		90		$\mu A$
$I_{V-SOURCE}$	Output Source Current	$V_{VS}=2V, V_{COMV}=2.5V$		90		$\mu A$
$V_{V-HGH}$	Output High Voltage	$V_{VS}=2.3V$	4.5			V
<b>Current-Error-Amplifier Section</b>						
$V_{IR}$	Reference Voltage		2.475	2.500	2.525	V
$I_{I-SINK}$	Output Sink Current	$V_{CS}=3V, V_{COMI}=2.5V$		55		$\mu A$
$I_{I-SOURCE}$	Output Source Current	$V_{CS}=0V, V_{COMI}=2.5V$		55		$\mu A$
$V_{I-HGH}$	Output High Voltage	$V_{CS}=0V$	4.5			V
<b>Cable Compensation Section</b>						
$V_{COMR}$	Variation Test Voltage on COMR Pin for Cable Compensation	$R_{COMR}=100k$		0.735		V
<b>Internal MOSFET Section</b>						
$DCY_{MAX}$	Maximum Duty Cycle			75		%
$BV_{DSS}$	Drain-Source Breakdown Voltage	$I_D=250\mu A, V_{GS}=0V$	600			V
$\Delta BV_{DSS} / \Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D=250\mu A$ , Referenced to $25^{\circ}C$		0.6		$V/^{\circ}C$
$I_S$	Maximum Continuous Drain-Source Diode Forward Current				1	A
$I_{SM}$	Maximum Pulsed Drain-Source Diode Forward Current				4	A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$I_D=0.5A, V_{GS}=10V$		9.3	11.5	$\Omega$
$I_{DSS}$	Drain-Source Leakage Current	$V_{DS}=600V, V_{GS}=0V, T_C=25^{\circ}C$			1	$\mu A$
		$V_{DS}=480V, V_{GS}=0V, T_C=100^{\circ}C$			10	
$t_{D-ON}$	Turn-On Delay Time <sup>(2,3)</sup>	$V_{DS}=300V, I_D=1.1A, R_G=25\Omega$		7	24	ns
$t_r$	Rise Time			21	52	ns
$t_{D-OFF}$	Turn-Off Delay Time			13	36	ns
$t_f$	Fall Time			27	64	ns
$C_{ISS}$	Input Capacitance	$V_{GS}=0V, V_{DS}=25V, f_S=1MHz$		130	170	pF
$C_{OSS}$	Output Capacitance			19	25	pF
<b>Over-Temperature-Protection Section</b>						
$T_{OTP}$	Threshold Temperature for OTP <sup>(4)</sup>			+140		$^{\circ}C$


### Notes:

2. Pulse test: pulse width  $\leq 300\mu s$ , duty cycle  $\leq 2\%$ .
3. Essentially independent of operating temperature.
4. When over-temperature protection is activated, the power system enters latch mode and output is disabled.


## Typical Performance Characteristics

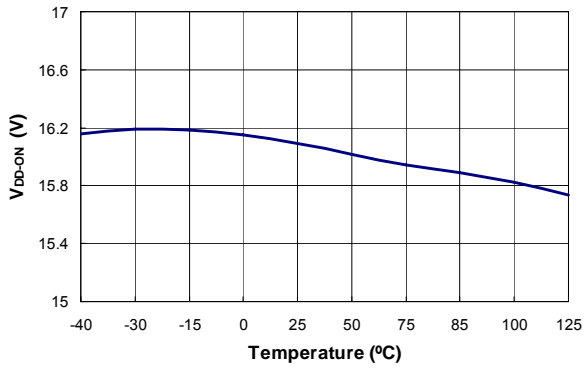


**Figure 6. Turn-On Threshold Voltage ( $V_{DD-ON}$ ) vs. Temperature**

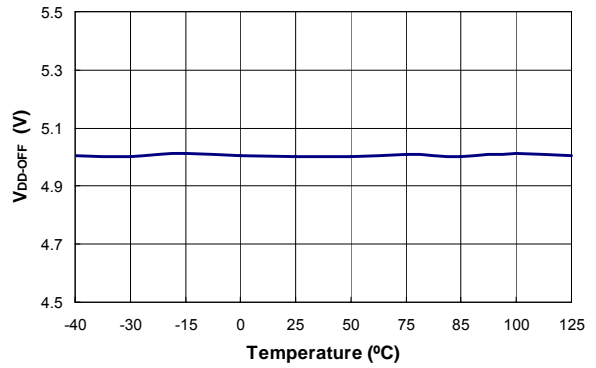


**Figure 7. Turn-Off Threshold Voltage ( $V_{DD-OFF}$ ) vs. Temperature**

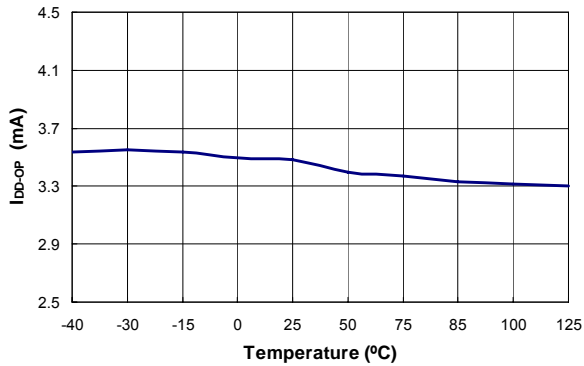


**Figure 8. Operating Current ( $I_{DD-OP}$ ) vs. Temperature**

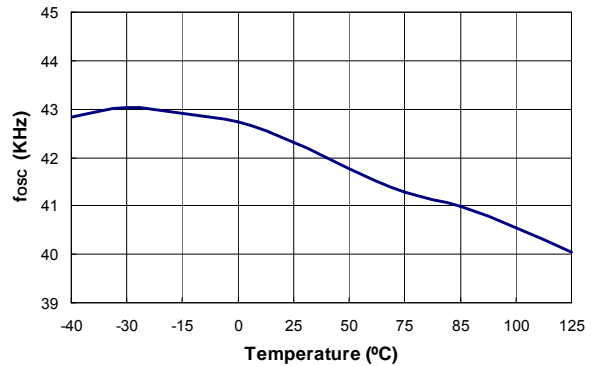

**Figure 9. Center Frequency ( $f_{OSC}$ ) vs. Temperature**

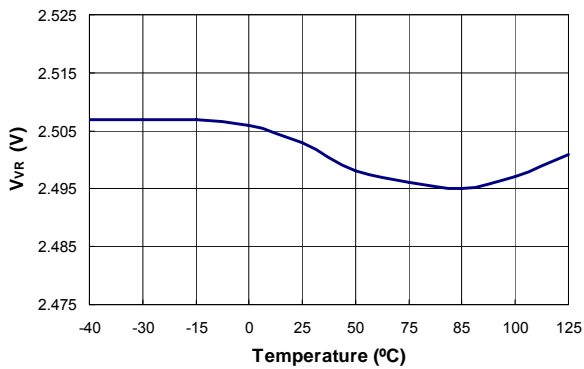


**Figure 10. Reference Voltage ( $V_{VR}$ ) vs. Temperature**

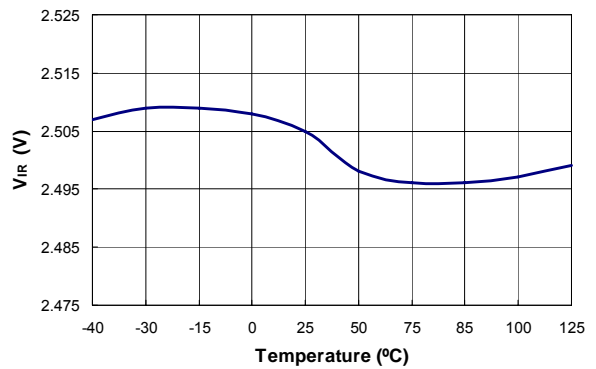


**Figure 11. Reference Voltage ( $V_{IR}$ ) vs. Temperature**


**Typical Performance Characteristics (Continued)**

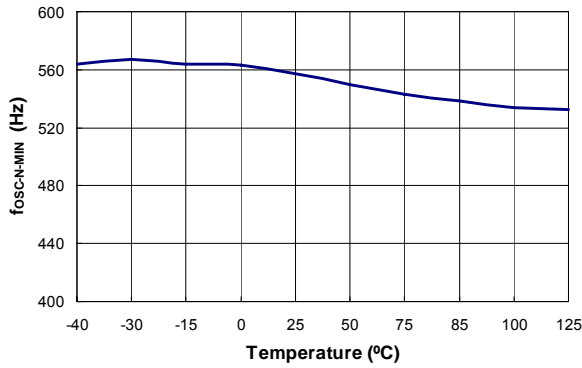


**Figure 12. Minimum Frequency at No Load (f<sub>OSC-N-MIN</sub>) vs. Temperature**

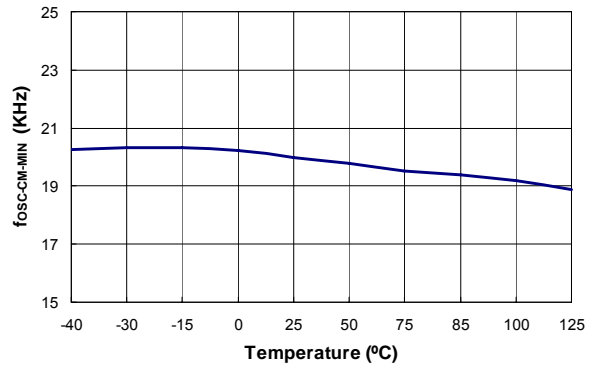


**Figure 13. Minimum Frequency at CCM (f<sub>OSC-CM-MIN</sub>) vs. Temperature**

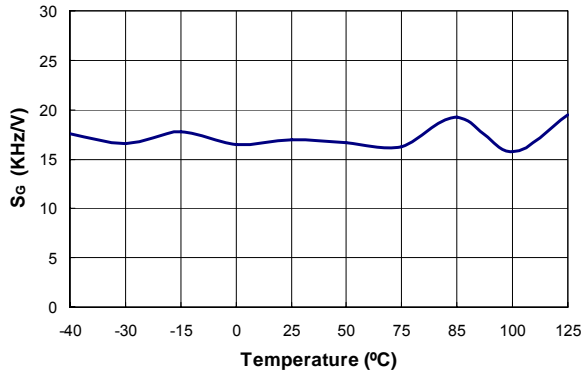


**Figure 14. Green Mode Frequency Decreasing Rate (S<sub>G</sub>) vs. Temperature**

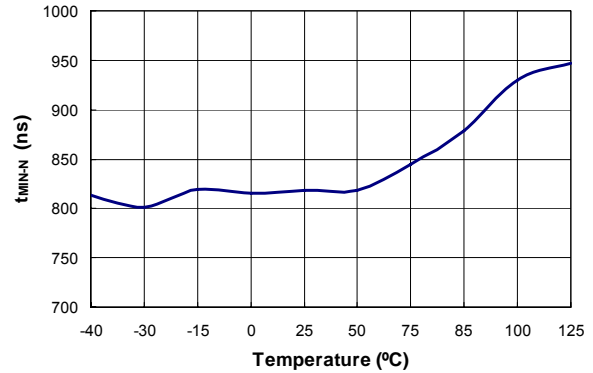

**Figure 15. Minimum On Time at No Load (t<sub>MIN-N</sub>) vs. Temperature**

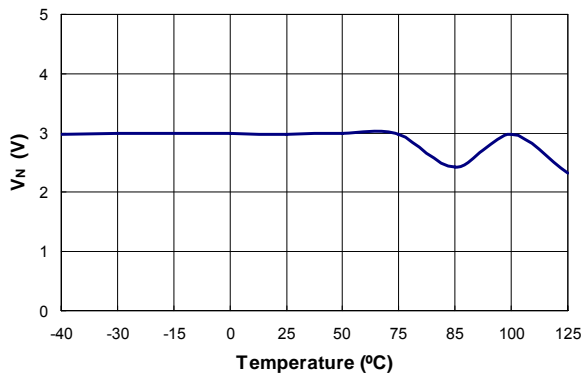


**Figure 16. Green Mode Starting Voltage on COMV Pin (V<sub>N</sub>) vs. Temperature**

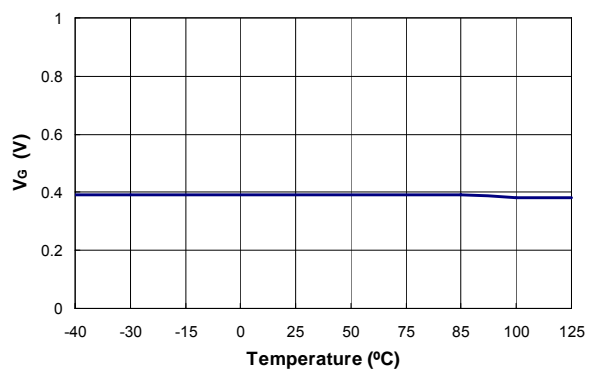


**Figure 17. Green Mode Ending Voltage on COMV Pin (V<sub>G</sub>) vs. Temperature**




## Typical Performance Characteristics (Continued)

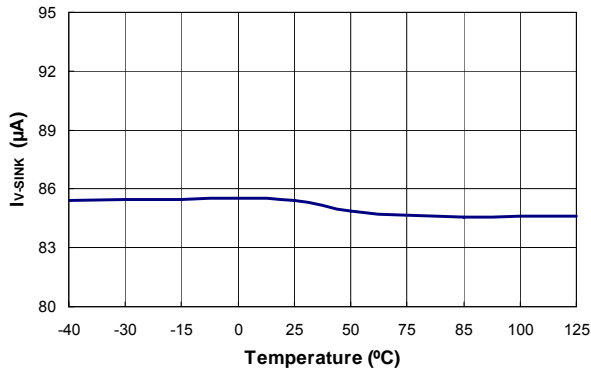


**Figure 18. Output Sink Current ( $I_{V-SINK}$ ) vs. Temperature**

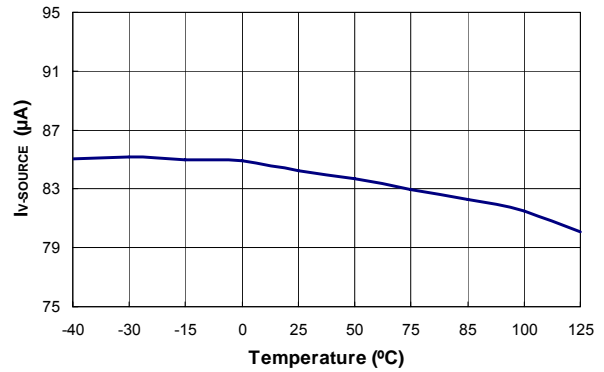


**Figure 19. Output Source Current ( $I_{V-SOURCE}$ ) vs. Temperature**

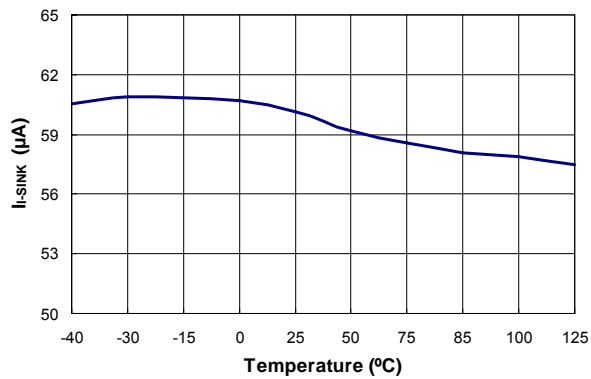


**Figure 20. Output Sink Current ( $I_{i-SINK}$ ) vs. Temperature**

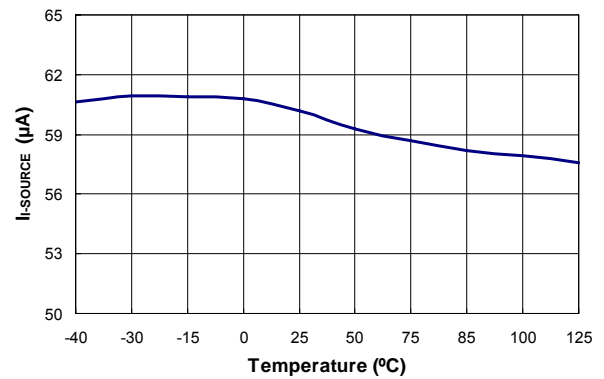

**Figure 21. Output Source Current ( $I_{i-SOURCE}$ ) vs. Temperature**

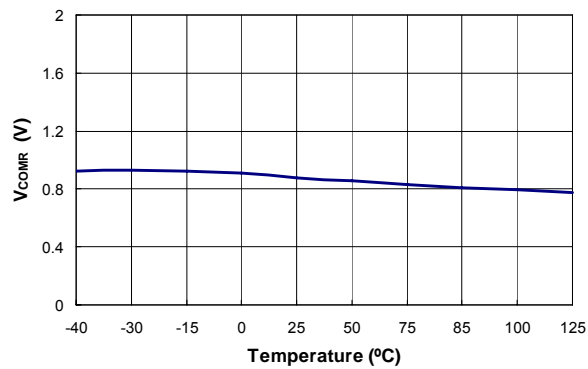

**Figure 22. Variation Test Voltage on COMR Pin for Cable Compensation ( $V_{COMR}$ ) vs. Temperature**

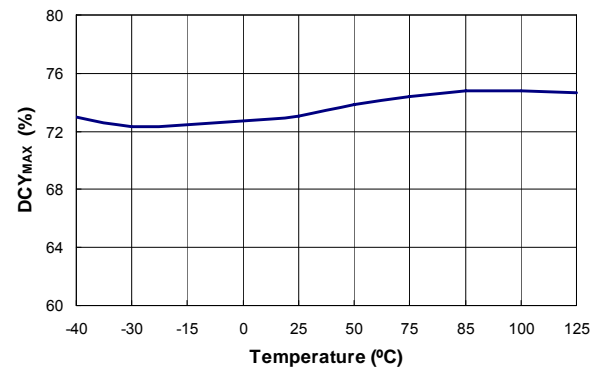

**Figure 23. Maximum Duty Cycle ( $DCY_{MAX}$ ) vs. Temperature**



### Cable Voltage Drop Compensation

When it comes to cellular phone charger applications, the actual battery is located at the end of cable, which causes, typically, several percent of voltage drop on the actual battery voltage. FSEZ1216 has a programmable cable voltage drop compensation, which provides a constant output voltage at the end of the cable over the entire load range in CV mode. As load increases, the voltage drop across the cable is compensated by increasing the reference voltage of voltage regulation error amplifier. The amount of compensation is programmed by the resistor on the COMR pin. The relationship between the amount of compensation and the COMR resistor is shown in Figure 26.

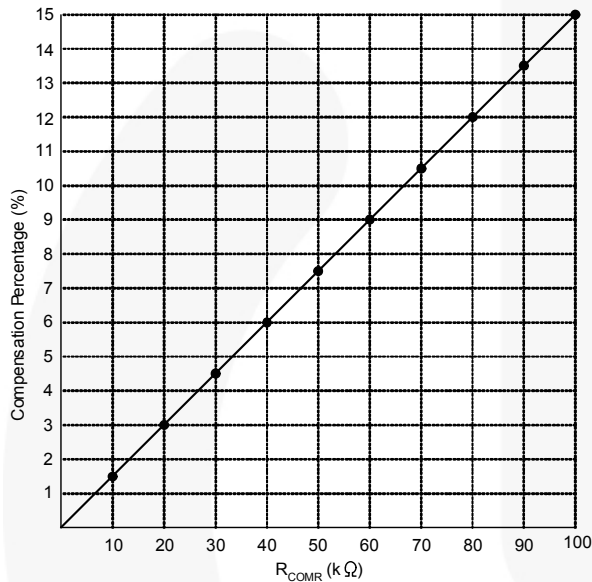


Figure 26. Cable Voltage Drop Compensation

### Temperature Compensation

Built-in temperature compensation provides constant voltage regulation over wide a range of temperature variation. This internal compensation current compensates the forward-voltage drop variation of the secondary-side rectifier diode.

### Green-Mode Operation

The FSEZ1216 uses voltage regulation error amplifier output ( $V_{COMV}$ ) as an indicator of the output load and modulates the PWM frequency, as shown in Figure 27, such that the switching frequency decreases as load decreases. In heavy load conditions, the switching frequency is fixed at 42KHz. Once  $V_{COMV}$  decreases below 2.8V, the PWM frequency starts to linearly decrease from 42KHz to 550Hz to reduce the switching losses. As  $V_{COMV}$  decreases below 0.8V, the switching frequency is fixed at 550Hz and FSEZ1216 enters deep green mode, where the operating current reduces to 1mA, further reducing the standby power consumption.

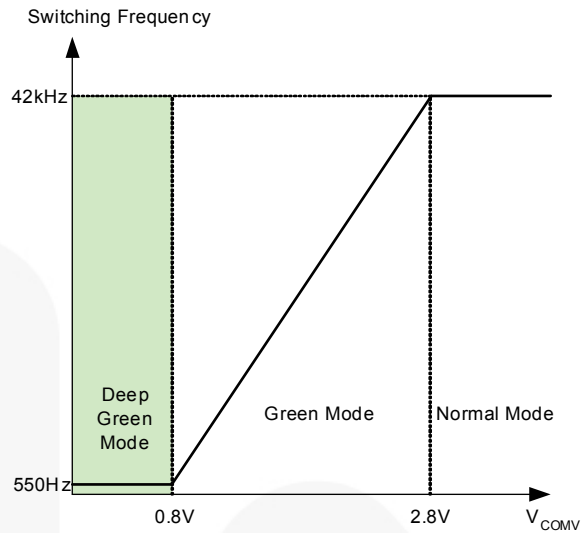


Figure 27. Switching Frequency in Green Mode

### Frequency Hopping

EMI reduction is accomplished by frequency hopping, which spreads the energy over a wider frequency range than the bandwidth measured by the EMI test equipment. FSEZ1216 has an internal frequency hopping circuit that changes the switching frequency between 39.4kHz and 44.6kHz with a period of 3ms, as shown in Figure 28.

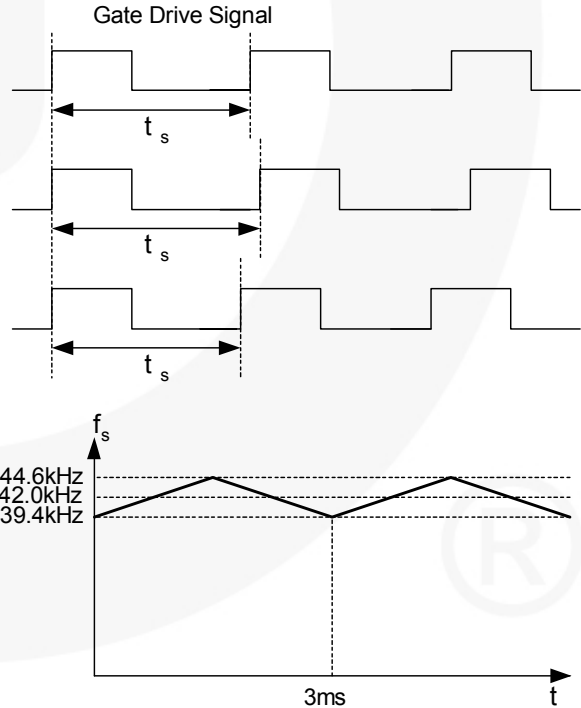


Figure 28. Frequency Hopping



## Typical Application Circuit (Primary-Side Regulated Flyback Charger)

Application	Fairchild Devices	Input Voltage Range	Output
Cell Phone Charger	FSEZ1216	90~265V <sub>AC</sub>	5V/0.78A (3.9W)

### Features

- High efficiency (>66% at full load) meeting Energy Star<sup>SM</sup> V2.0 and CEC regulation
- Low standby power consumption (Pin=0.095W for 115V<sub>AC</sub> and Pin=0.138W for 230V<sub>AC</sub>)
- Tight output regulation (CV:±5%, CC:±7%)

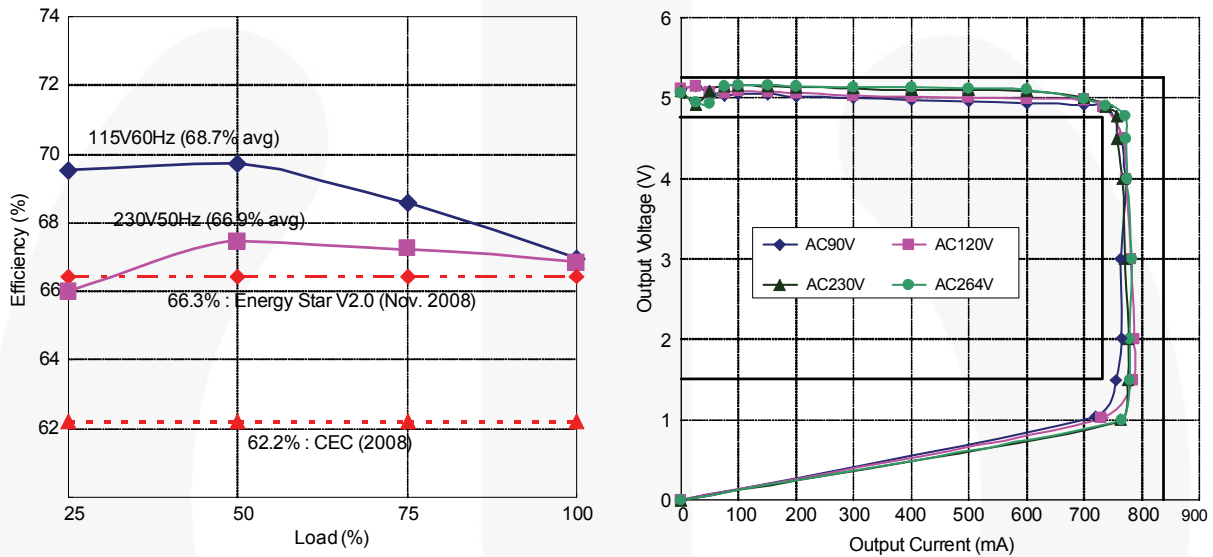


Figure 31. Measured Efficiency and Output Regulation


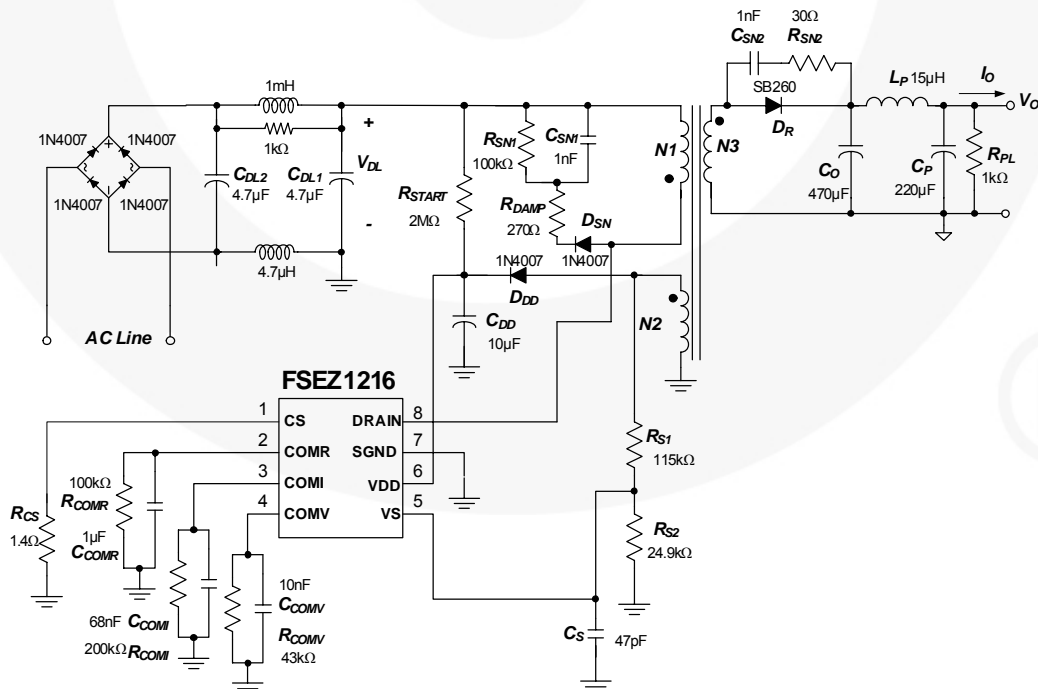


Figure 32. Schematic of Typical Application Circuit

### Typical Application Circuit (Continued)


#### Transformer specification

- Core: EE16
- Bobbin: EE16

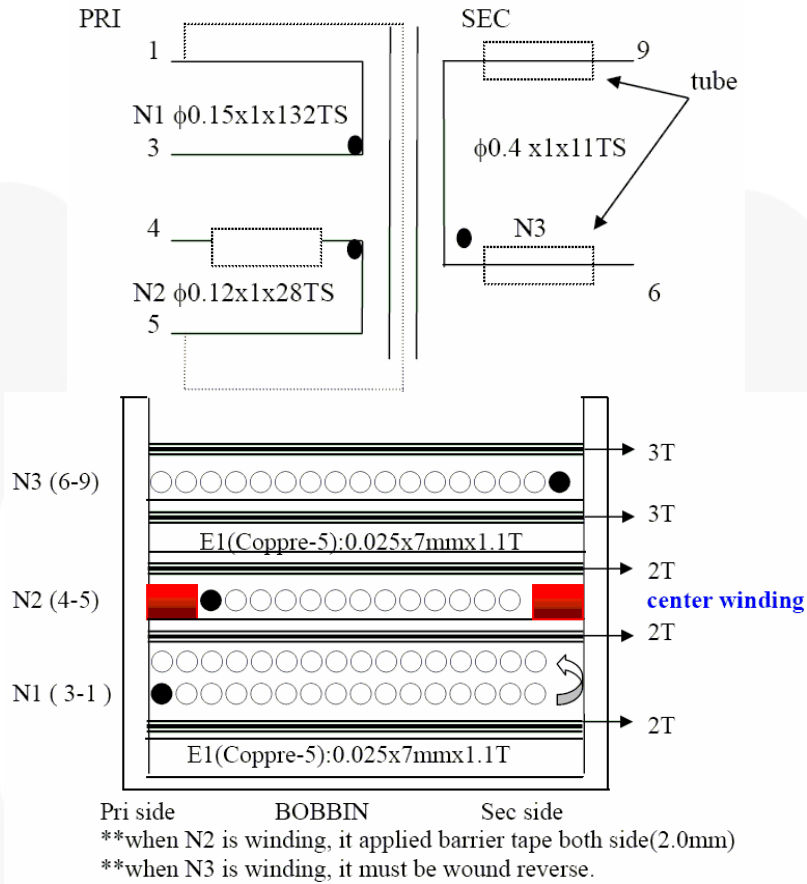

	Pin	Specifications	Remark
Primary-Side Inductance	1 – 3	2.3mH ± 5%	100kHz, 1V
Primary-Side Effective Leakage	1 – 8	65μH ± 5%.	Short one of the secondary windings

## Physical Dimensions

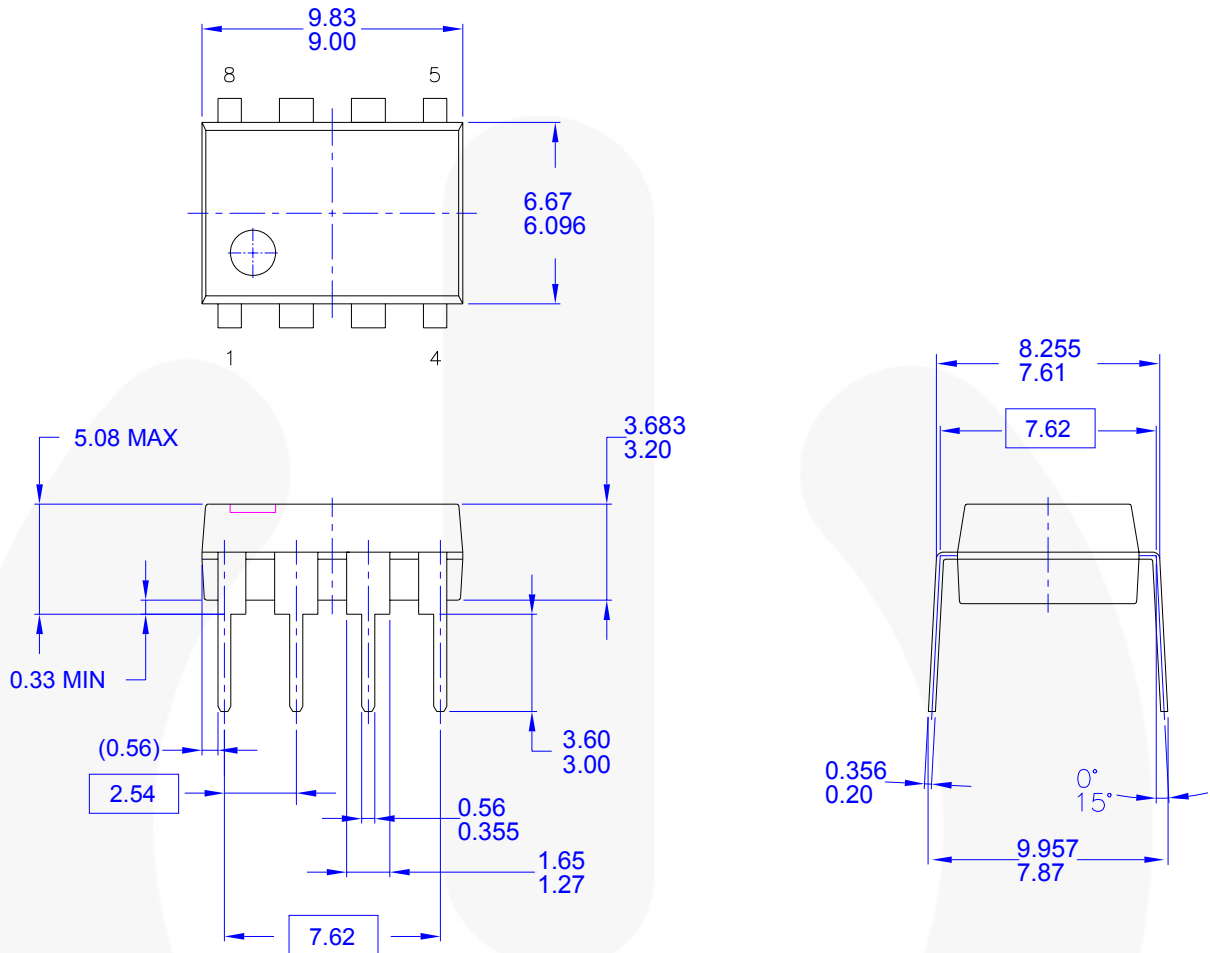

- NOTES: UNLESS OTHERWISE SPECIFIED
- A) THIS PACKAGE CONFORMS TO JEDEC MS-001 VARIATION BA
  - B) ALL DIMENSIONS ARE IN MILLIMETERS.
  - C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
  - D) DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994
  - E) DRAWING FILENAME AND REVISON: MKT-N08FREV2.

**Figure 33. 8-Lead, Dual Inline Package (DIP-8)**

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.








Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:  
<http://www.fairchildsemi.com/packaging/>





**TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

- |   |   |   |   |
|---|---|---|---|
| Auto-SPM™   | F-PFET™   | PowerTrench®  | The Power Franchise®  |
| Build it Now™   | FRFET®  | PowerXS™  |  |
| CorePLUS™   | Global Power Resource™  | Programmable Active Droop™  | TinyBoost™  |
| CorePOWER™  | Green FPST™   | QFET®   | TinyBuck™   |
| CROSSVOLT™  | Green FPST™ e-Series™   | QST™  | Quiet Series™   |
| CTL™  | Gmax™   | RapidConfigure™   | TinyLogic®  |
| Current Transfer Logic™   | GTO™  |  | TINYOPTO™   |
| EcoSPARK®   | IntelliMAX™   | Saving our world, 1mW/W at a time™  | TinyPower™  |
| EfficientMax™   | ISOPLANAR™  | SmartMax™   | TinyPWM™  |
| EZSWITCH™   | MegaBuck™   | SMART START™  | TinyWire™   |
|  | MICROCOUPLER™   | SPM®  | TriFault Detect™  |
|  | MicroFET™   | STEALTH™  | TRUECURRENT™  |
| Fairchild®  | MicroPak™   | SuperFET™   | μSerDes™  |
| Fairchild Semiconductor®  | MillerDrive™  | SuperSOT™.3   |  |
| FACT Quiet Series™  | MotionMax™  | SuperSOT™.6   | UHC®  |
| FACT®   | Motion-SPM™   | SuperSOT™.8   | Ultra FRFET™  |
| FAST®   | OPTOLOGIC®  | SupreMOS™   | UniFET™   |
| FastvCore™  | OPTOPLANAR®   | SyncFET™  | VCX™  |
| FETBench™   |  | Sync-Lock™  | VisualMax™  |
| FlashWriter®  | PDP SPM™  |  | XST™  |
| FPS™  | Power-SPM™  |   |   |

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

**DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**ANTI-COUNTERFEITING POLICY**

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

**PRODUCT STATUS DEFINITIONS**

**Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 140