



MOTOROLA

MC33502

Prototype Information One Volt SMARTMOS™ Rail-to-Rail Operational Amplifier


The MC33502 operational amplifier provides rail-to-rail operation on both the input and output. The output can swing within 50 mV of each rail. This rail-to-rail operation enables the user to make full use of the entire supply voltage range available. It is designed to work at very low supply voltages (1.0V and ground), yet can operate with a supply of up to +7 V and ground. Output current boosting techniques provide high output current capability while keeping the drain current of the amplifier to a minimum.

- Low Voltage, Single Supply Operation. (+ 1.0V and Gnd to +7V and Gnd).
- High input impedance: Less than 40 fA input current.
- Typical Unity Gain Bandwidth @ 5V = 5 MHz, @ 1V = 4 MHz.
- High Output Current (I_{SC} = 50 mA @ 5V, 10mA @ 1V)
- Output Voltage Swings within 50 mV of both Rails.
- Input Voltage Range Includes both Supply Rails.
- High Voltage Gain: 100dB.
- No Phase Reversal on the Output for Over-driven Input Signals.
- Input Offset Trimmed to <500µV Typical.
- Low Supply Current (I_D = 1.2 mA, Typ).
- 600 Ohm Drive Capability.
- Extended Operating Temperature Range (-40° to +105°C)

APPLICATIONS

- Single Cell NiCd / Ni MH Powered Systems
- Single Cell Lithium Powered Systems
- Portable Communication Devices
- Low Voltage Active Filters
- General Systems Requiring Battery Power

Simplified Block Diagram

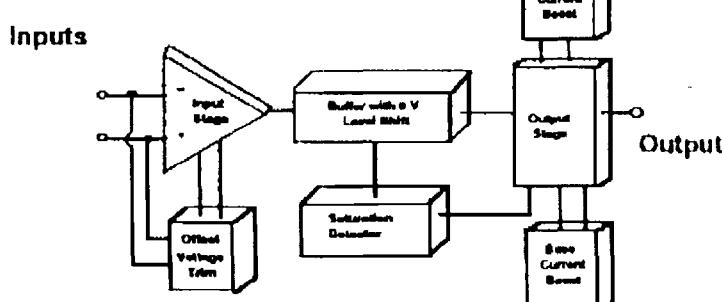


LOW VOLTAGE
RAIL TO RAIL
OPERATIONAL AMPLIFIER
SEMICONDUCTOR
TECHNICAL DATA



P SUFFIX
PLASTIC PACKAGE
CASE 626



D SUFFIX
PLASTIC PACKAGE
CASE 751

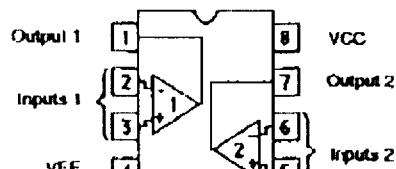

(Dual, Top View)

ORDERING INFORMATION

DEVICE	TEMPERATURE RANGE	PACKAGE
MC33502P	-40° to +105°C	Plastic DIP
MC33502D	-40° to +105°C	SO-8

MC33502

MAXIMUM RATING

Rating	Symbol	Value	Unit
Supply Voltage (VCC to VEE)	V _S	7	V
ESD Protection Voltage at any Pin-Human Body Model	V _{ESD}	2000	V
Voltage at any Device Pin	V _{DP}	V _S ± 0.3	V
Input Differential Voltage Range	V _{IDR}	V _{CC} to V _{EE}	V
Common Mode Input Voltage Range	V _{CM}	V _{CC} to V _{EE}	V
Output Short Circuit Duration	t _S	(Note 1)	sAC
Maximum Junction Temperature	T _J	+150	°C
Storage Temperature Range	T _{Stg}	-65 to +150	°C
Maximum Power Dissipation	P _D	(Note 1)	mW

NOTES: 1. Power dissipation must be considered to ensure maximum junction temperature (T_J) is not exceeded.

DC ELECTRICAL CHARACTERISTICS (V_{CC} = 5.0 V, V_{EE} = 0 V, V_{CM} = V_O = V_{CC}/2, R_L to V_{CC}/2, T_A = 25°C, unless otherwise noted.)

Characteristic	Figure	Symbol	Min	Typ	Max	Unit
Input Offset Voltage V _{CC} = 1.0 V; T _A = +25°C T _A = -40° to +105°C V _{CC} = 3.0 V, V _{CM} = 0 to V _{CC} : T _A = +25°C T _A = -40° to +105°C V _{CC} = 5.0 V, V _{CM} = 0 to V _{CC} : T _A = +25°C T _A = -40° to +105°C	-	V _{IO}	-	0.5 1.0	-	mV
Input Offset Voltage Temperature Coefficient (R _S = 50Ω) T _A = -40° C to +105° C	-	ΔV _{IO} /ΔT	-	2.0	-	µV/°C
Input Bias Current V _{CC} = 1.0 V: V _{CC} = 3.0 V: V _{CC} = 5.0 V:	-	I _{IB}	-	40 40 40	-	IA
Common Mode Input Voltage Range	-	V _{ICR}	V _{EE}	-	V _{CC}	V

Large Signal Voltage Gain V _{CC} = 1.0 V; T _A = +25°C R _L = 10 kΩ R _L = 1 kΩ T _A = -40° to +105°C R _L = 10 kΩ R _L = 1 kΩ V _{CC} = 3.0 V; T _A = +25°C R _L = 10 kΩ R _L = 1 kΩ T _A = -40° to +105°C R _L = 10 kΩ R _L = 1 kΩ V _{CC} = 5.0 V; T _A = +25°C R _L = 10 kΩ R _L = 1 kΩ T _A = -40° to +105°C R _L = 10 kΩ R _L = 1 kΩ	-	A _{VOL}	-	100 40	-	kV/V
	-	-	-	-	-	-
	-	-	-	200 40	-	-
	-	-	-	-	-	-

MC33502

DC ELECTRICAL CHARACTERISTICS ($V_{CC} = 5.0$ V, $V_{EE} = 0$ V, $V_{CM} = V_O = V_{CC}/2$, R_L to $V_{CC}/2$, $T_A = 25^\circ\text{C}$, unless otherwise noted.)


Characteristic	Figure	Symbol	Min	Typ	Max	Unit
Output Voltage Swing, High ($V_{IO} = +/- 0.2$ V)						V
$V_{CC} = 1.0$ V; $T_A = +25^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$ $T_A = -40^\circ \text{ to } +105^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$		V_{OH}		0.95 0.88		
$V_{CC} = 3.0$ V; $T_A = +25^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$ $T_A = -40^\circ \text{ to } +105^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$				2.93 2.84		
$V_{CC} = 5.0$ V; $T_A = +25^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$ $T_A = -40^\circ \text{ to } +105^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$				4.92 4.81		
Output Voltage Swing, Low ($V_{IL} = +/- 0.2$ V)		V_{OL}		0.016 0.047		V
$V_{CC} = 1.0$ V; $T_A = +25^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$ $T_A = -40^\circ \text{ to } +105^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$						
$V_{CC} = 3.0$ V; $T_A = +25^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$ $T_A = -40^\circ \text{ to } +105^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$				0.02 0.08		
$V_{CC} = 5.0$ V; $T_A = +25^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$ $T_A = -40^\circ \text{ to } +105^\circ\text{C}$ $R_L = 10 \text{ k}\Omega$ $R_L = 600 \Omega$				0.024 0.10		
Common Mode Rejection ($V_{in} = 0$ to 5.0 V)		CMR		74		dB
Power Supply Rejection Ratio $V_{CC}/V_{EE} = 5.0$ V/Gnd to 3.0 V/Gnd $V_{CC}/V_{EE} = 3.0$ V/Gnd to 1.0 V/Gnd		PSRR		50 50		$\mu\text{V/V}$
Output Short Circuit Current ($V_{in} \text{ Diff} = \pm 1$ V)		I_{SC}				mA
$V_{CC} = 1.0$ V: Source Sink				13		
$V_{CC} = 3.0$ V: Source Sink				32		
$V_{CC} = 5.0$ V: Source Sink				64		
$V_{CC} = 1.0$ V: Source Sink				40		
$V_{CC} = 3.0$ V: Source Sink				70		
Power Supply Current (Per amplifier, $V_O = 0$ V)		I_D				mA
$V_{CC} = 1.0$ V: $V_{CC} = 3.0$ V: $V_{CC} = 5.0$ V:				1.2 1.5 1.65		

MC33502

AC ELECTRICAL CHARACTERISTICS ($V_{CC} = 5.0V$, $V_{EE} = 0V$, $V_{CM} = V_O = V_{CC}/2$, $T_A = 25^\circ C$, unless otherwise noted)

Characteristic	Figure	Symbol	Min	Typ	Max	Unit
Slew Rate ($V_S = \pm 2.5V$, $V_O = -2.0V$ to $+2.0V$, $R_L = 600\Omega$, $A_V = +1.0$) Positive Slope Negative Slope	-	SR	-	+4.0 -3.0	-	V/ μ s
Unity Gain Bandwidth $V_{CC} = 1.0V$ $V_{CC} = 3.0V$ $V_{CC} = 5.0V$	-	BW	-	4.0 5.0 5.0	-	MHz
Gain Margin ($R_L = 10k\Omega$, $C_L = 0\text{ pF}$)	-	Am	-	6.5	-	dB
Phase Margin ($R_L = 10k\Omega$, $C_L = 0\text{ pF}$)	-	Phm	-	60	-	Deg
Channel Separation ($f = 1.0\text{ Hz}$ to 20 kHz , $R_L = 600\Omega$)	-	CS	-	120	-	dB
Power Bandwidth ($V_O = 4.0\text{ Vp-p}$, $R_L = 1k\Omega$, THD $\leq 1.0\%$)	-	BWP	-	200	-	kHz
Total Harmonic Distortion ($V_O = 4.5\text{ Vp-p}$, $R_L = 600\Omega$, $A_V = +1.0$) $f = 1.0\text{ kHz}$ $f = 10\text{ kHz}$	-	THD	-	0.004 0.010	-	%
Differential Input Resistance ($V_{CM} = 0V$)	-	R_{in}	-	>1	-	tera Ω
Differential Input Capacitance ($V_{CM} = 0V$)	-	C_{in}	-	2.0	-	pF
Equivalent Input Noise Voltage ($V_{CC} = 1.0V$, $V_{CM} = 0V$, $V_{EE} = Gnd$, $R_S = 100\Omega$) $f = 10\text{ Hz}$ $f = 1.0\text{ kHz}$	-	n_n	-	60 30	-	nV/ $\sqrt{\text{Hz}}$

MC33502 Simplified Block Diagram

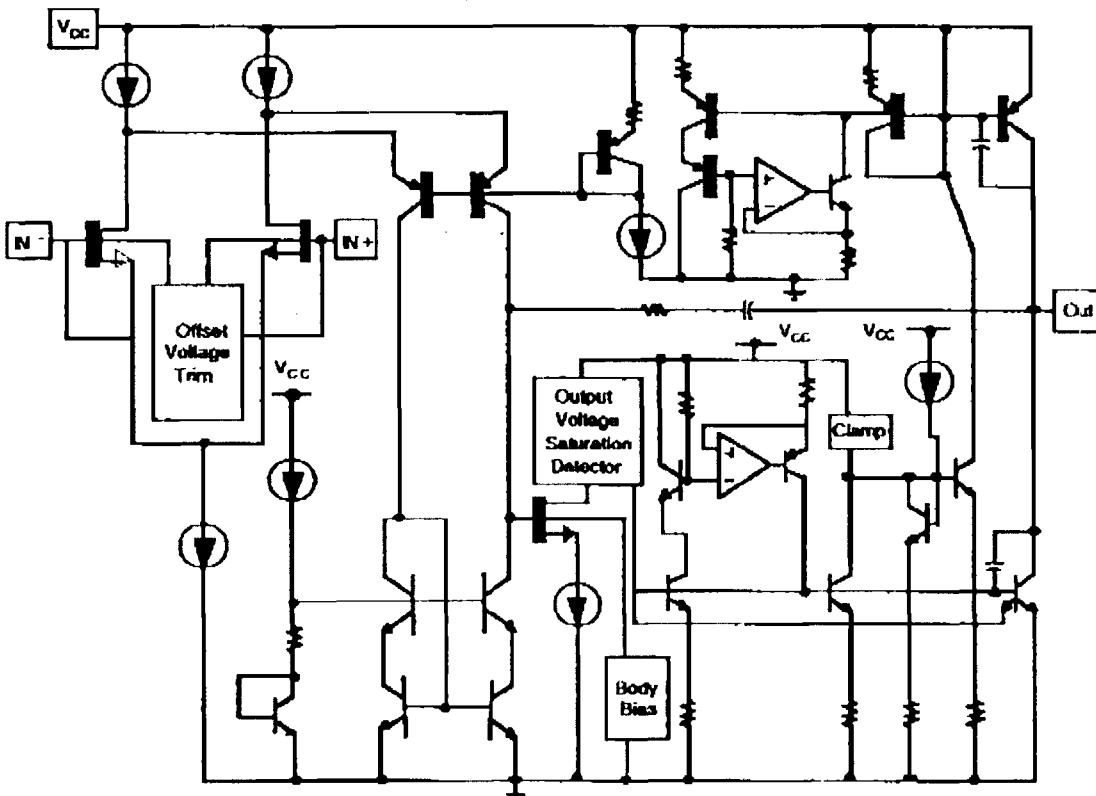

GENERAL INFORMATION

The MC33502 dual operational amplifier is unique in its ability to provide one volt rail-to-rail performance on both the input and output by using a SMARTMOS process. The amplifier output swings within 50 mV of both rails and is able to provide 50 mA of output drive current with a 5.0 volt supply, and 10 mA with a 1.0 volt supply. A 5.0 MHz bandwidth and a slew rate of 3.0V/us is achieved with high speed depletion mode NMOS (DNMOS) and vertical PNP transistors. This device is characterized over a temperature range of -40°C to 105°C.

CIRCUIT INFORMATION

Input Stage:

One volt rail-to-rail performance is achieved in the MC33502 at the input by using a single pair of depletion mode NMOS devices (DNMOS) to form a differential amplifier with a very low input current of 40 fA. The normal input common mode range of a DNMOS device, with an ion implanted negative threshold, includes ground and relies on the body effect to dynamically shift the threshold to a positive value as the gates are moved from ground towards the positive supply. Because the device is manufactured in a p-well process, the body effect coefficient is sufficiently large to ensure that the input stage will remain saturated when the inputs are at the positive rail. This also applies at very low supply voltages. The one volt rail-to-rail input stage consists of a DNMOS differential amplifier, a folded cascode, and a low voltage balanced mirror. The low voltage cascaded balanced mirror provides high 1st stage gain and base current cancellation without sacrificing signal integrity. Also, the input offset voltage is trimmed to less than 1.0 mV because of the limited available supply voltage. The body voltage of the input DNMOS differential pair is

internally trimmed to minimize the input offset voltage. A common mode feedback path is also employed to enable the offset voltage to track over the input common mode voltage. The total operational amplifier quiescent current drop is 1.3 mA/amp.







Output Stage:

An additional feature of this device is an "on demand" base current cancellation amplifier. This feature provides base drive to the output power devices by making use of a buffer amplifier to perform a voltage-to-current conversion. This is done in direct proportion to the load conditions. A buffer is necessary to isolate the load current effects in the output stage from the input stage. Because of the low voltage conditions, a DNMOS follower is used to provide an essentially zero voltage level shift. This buffer isolates any load current changes on the output stage from loading the input stage. This "on demand" feature allows these amplifiers to consume only a few micro-amps of current when the output stage is in its quiescent mode. Yet it provides high output current when required by the load. The rail-to-rail output stage current boost circuit provides 50 mA of output current with a 5.0 volt supply (For a 1.0 volt supply output stage will do 10 mA.) enabling the op amp to drive a 100 ohm load. A high speed vertical PNP transistor provides excellent frequency performance while sourcing current. The op amp is also internally compensated to provide a phase margin of 60 degrees. It has a unity gain of 5.0 MHz with a 5.0V supply and 4.0 MHz with a 1.0 V supply.

LOW VOLTAGE OPERATION


The MC33502 will operate at supply voltages from 0.9V to 7.0V and ground. Since the device is rail-to-rail on both input and output, high dynamic range single battery cell applications are now possible.

MC33502

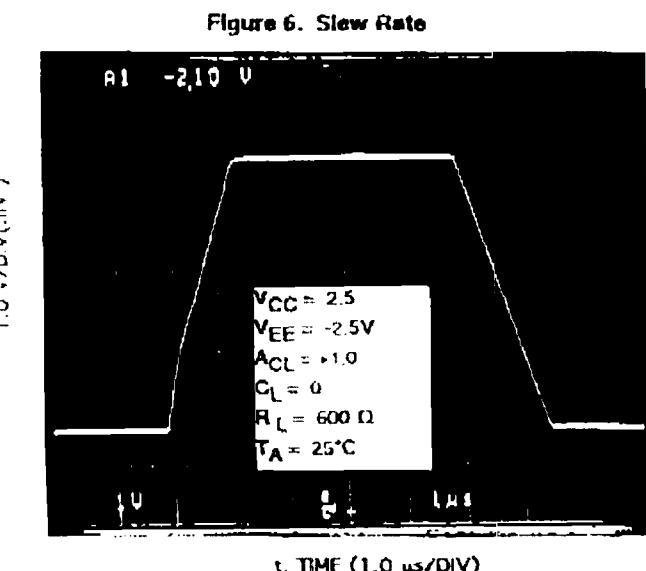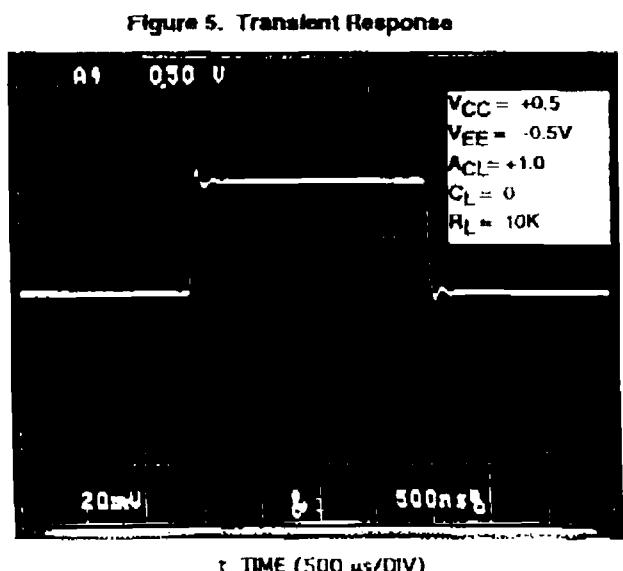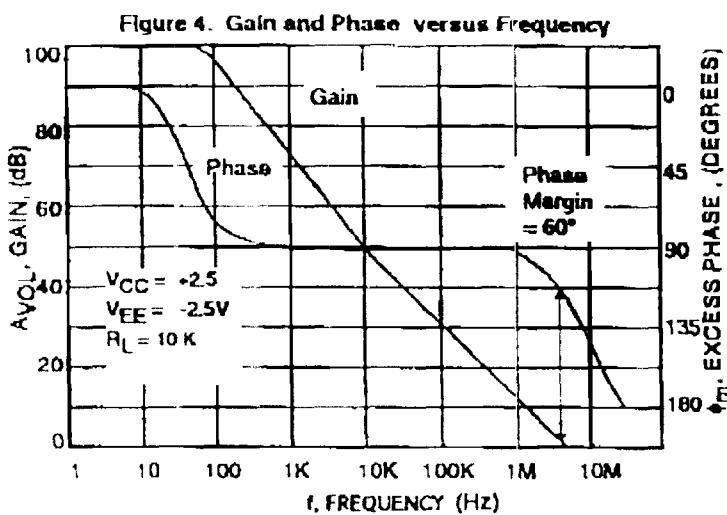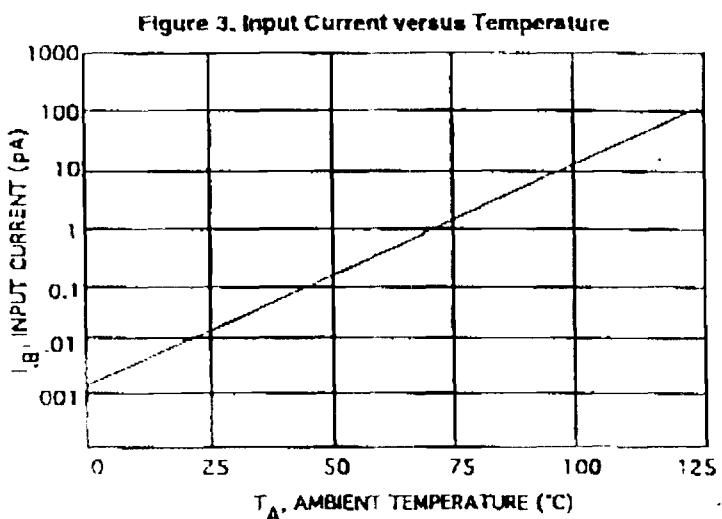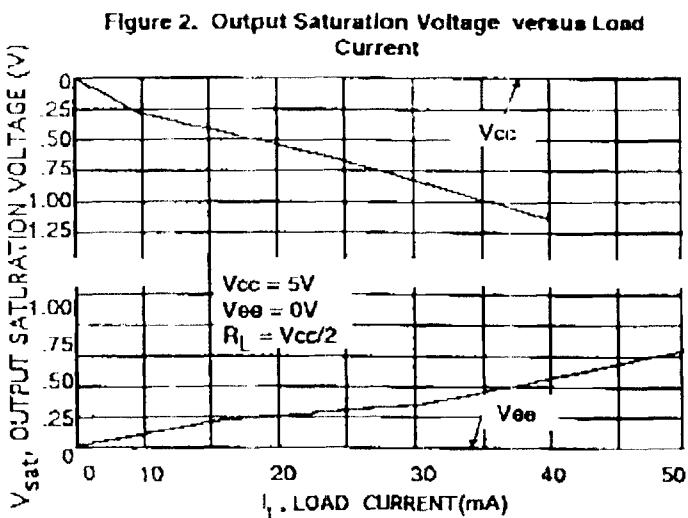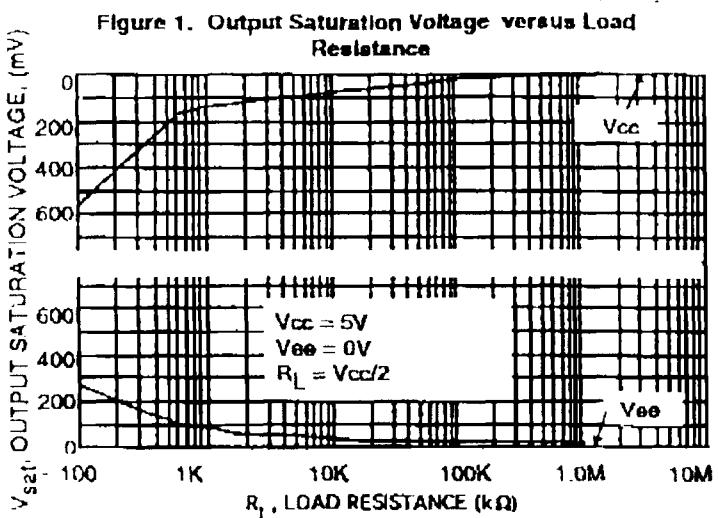

OUTLINE DIMENSIONS


P SUFFIX
PLASTIC PACKAGE
CASE 626-05

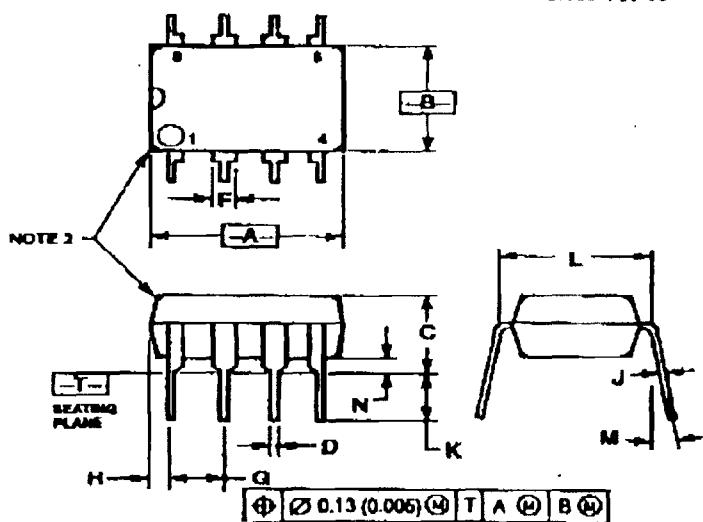

- NOTES:
1. DIMENSION L TO CENTER OF LEAD WHEN FORMED IN PARALLEL.
 2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
 3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

DIM.	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	3.40	10.18	0.134	0.400
B	5.10	8.60	0.200	0.339
C	3.84	4.45	0.150	0.175
D	0.38	0.51	0.015	0.020
E	1.02	1.78	0.040	0.070
F	2.34 BSC	—	0.100 BSC	—
G	0.78	1.27	0.030	0.050
H	0.20	0.30	0.008	0.012
K	2.92	3.47	0.115	0.136
L	7.82 BSC	—	0.300 BSC	—
M	—	10°	—	10°
N	0.76	1.01	0.030	0.040

D SUFFIX
PLASTIC PACKAGE
CASE 751-05
(SO-8)

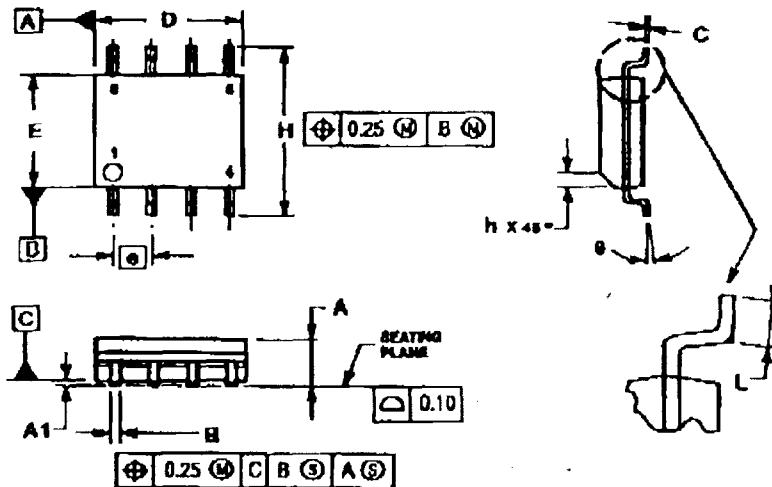

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1984.
 2. DIMENSIONS ARE IN MILLIMETERS.
 3. DIMENSION D AND E DO NOT INCLUDE MOLD PROTRUSION.
 4. MAXIMUM MOLD PROTRUSION 0.15 PER SIDE.
 5. DIMENSION B DOES NOT INCLUDE MOLD PROTRUSION. ALLOWABLE CANTER PROTRUSION SHALL BE 0.127 TOTAL IN EXCESS OF THE B DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM.	MILLIMETERS	
	MIN.	MAX.
A	1.35	1.76
A1	0.10	0.26
B	0.35	0.49
C	0.18	0.25
D	4.00	5.00
E	1.00	1.08
F	1.27 BSC	—
H	6.02	6.20
I	0.23	0.30
J	0.41	1.25
K	—	7°

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

MFAX is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution:
P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447

MFAX: MFAX@emslps.mot.com - TOUCHTONE: 602-244-6609
INTERNET: http://Design-NL.T.com

JAPAN: Nippon Motorola Ltd., Telsumi-SPD-JI, DC, 6F Setsubu-Butsuryu-Center
3-14-2 Telsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd., 88 Tai Ping Industrial Park,



MOTOROLA