

<b>SANYO</b>	No.2217A	<b>2SA1450/2SC3708</b>
PNP/NPN Epitaxial Planar Silicon Transistors		
Low-Frequency Driver Applications		

**Features**

- Adoption of FBET process
- AF amp, AF power amp
- High breakdown voltage  $V_{CEO} > 80V$

( ): 2SA1450

**Absolute Maximum Ratings at  $T_a = 25^\circ C$**

			unit
Collector to Base Voltage	$V_{CBO}$	(-)100	V
Collector to Emitter Voltage	$V_{CEO}$	(-)80	V
Emitter to Base Voltage	$V_{EBO}$	(-)5	V
Collector Current	$I_C$	(-)500	mA
Collector Current (Pulse)	$I_{CP}$	(-)800	mA
Base Current	$I_B$	(-)100	mA
Collector Dissipation	$P_C$	600	mW
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature	$T_{stg}$	-55 to +150	$^\circ C$


**Electrical Characteristics at  $T_a = 25^\circ C$**

			min	typ	max	unit
Collector Cutoff Current	$I_{CBO}$	$V_{CB} = (-)60V, I_E = 0$			(-)0.1	$\mu A$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB} = (-)4V, I_C = 0$			(-)0.1	$\mu A$
DC Current Gain	$h_{FE(1)}$	$V_{CE} = (-)5V, I_C = (-)50mA$	100*		400*	
	$h_{FE(2)}$	$V_{CE} = (-)5V, I_C = (-)400mA$	60			
Gain-Bandwidth Product	$f_T$	$V_{CE} = (-)10V, I_C = (-)10mA$		120		MHz
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = (-)400mA, I_B = (-)40mA$		0.16		V
				(-0.2) (-0.5)		
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = (-)400mA, I_B = (-)40mA$		(-)0.9	(-)1.2	V
Output Capacitance	$C_{ob}$	$V_{CB} = (-)10V, f = 1MHz$		(7)5		pF
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)10\mu A, I_E = 0$	(-)100			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)1mA, R_{BE} = \infty$	(-)80			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = (-)10\mu A, I_C = 0$	(-)5			V

\*: The 2SA1450/2SC3708 are classified by 50mA  $h_{FE}$  as follows:









100 R 200	140 S 280	200 T 400
-----------	-----------	-----------

**Package Dimensions 2003A**  
(unit: mm)








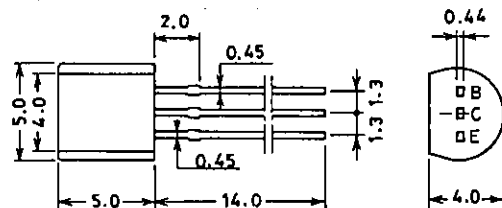


JEDEC: TO-92      B: Base  
EIAJ: SC-43      C: Collector  
SANYO: NP      E: Emitter

2SA1450/2SC3708

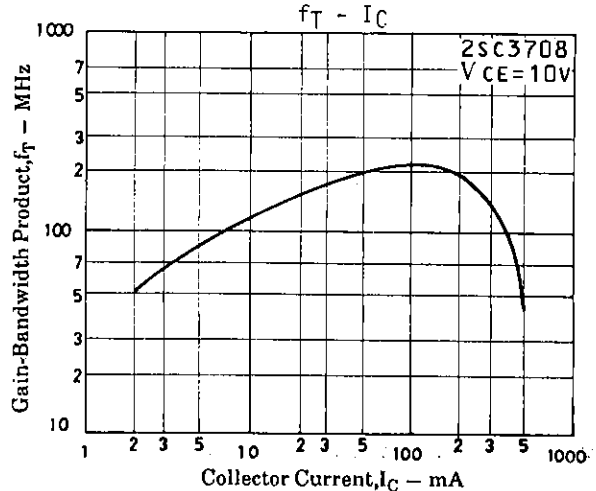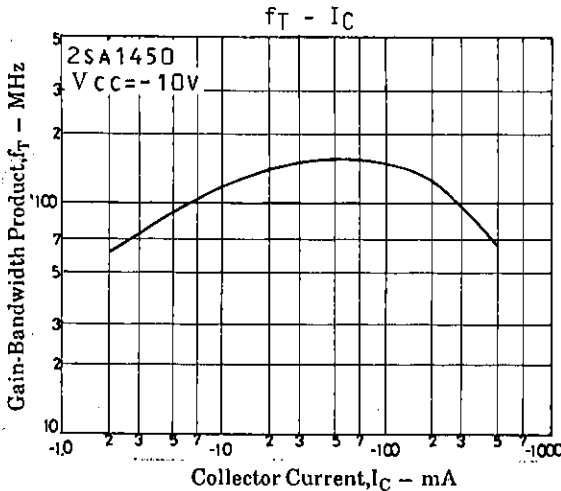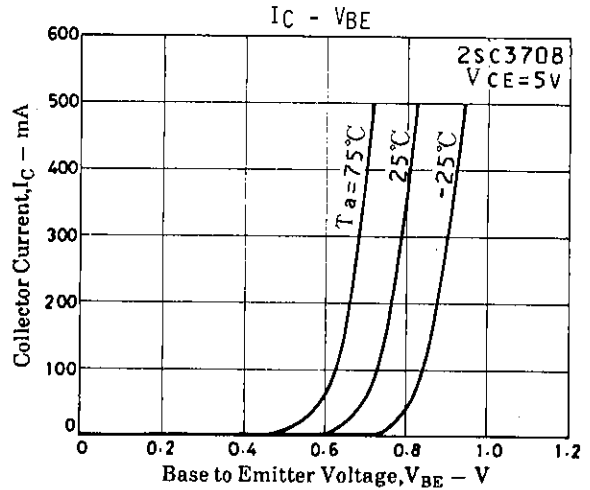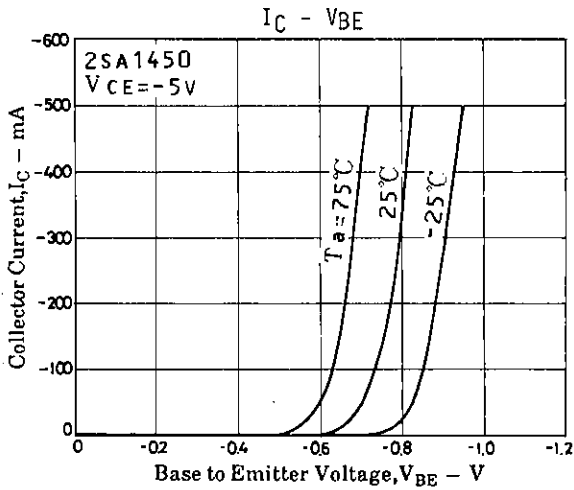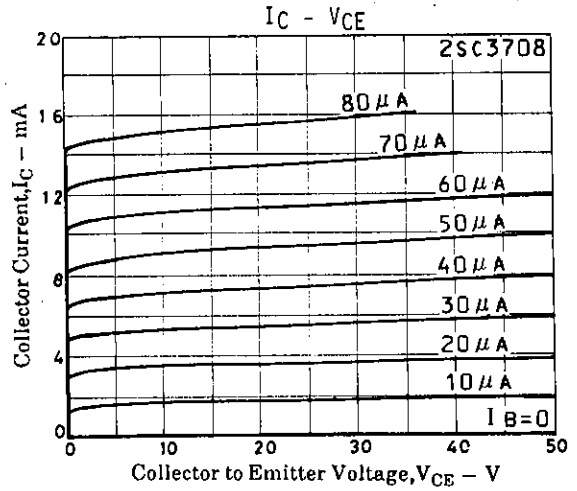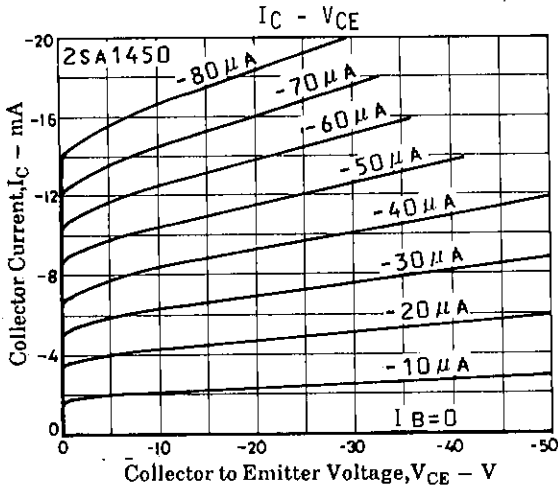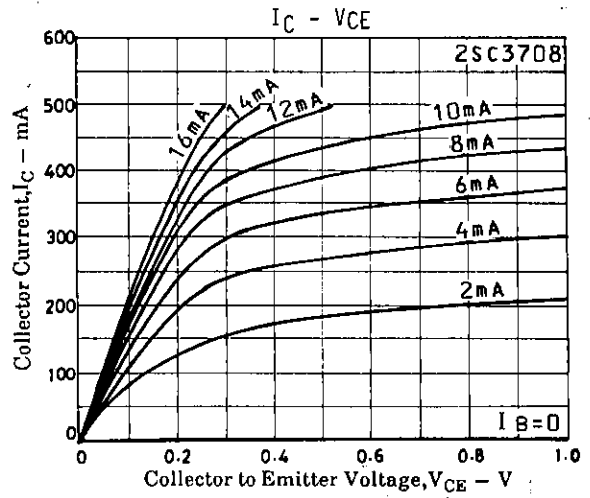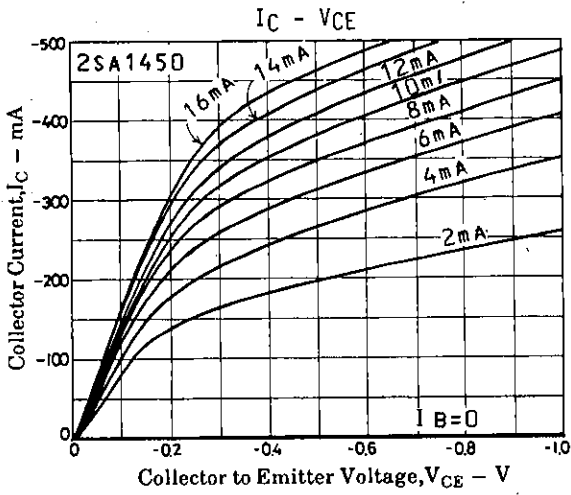

2SA1450/2SC3708

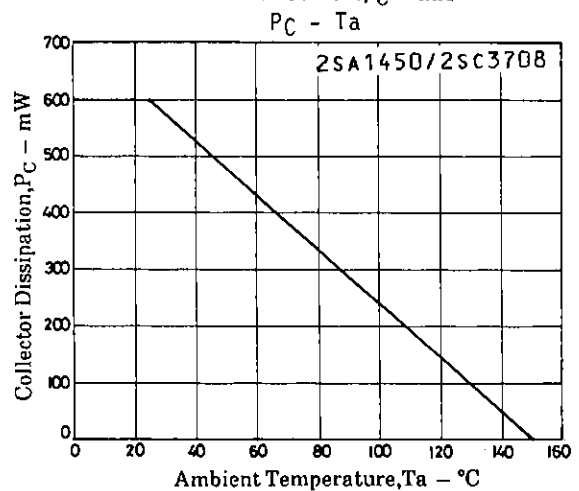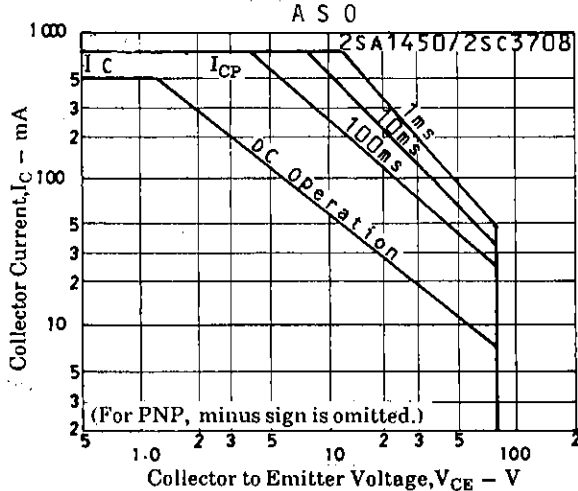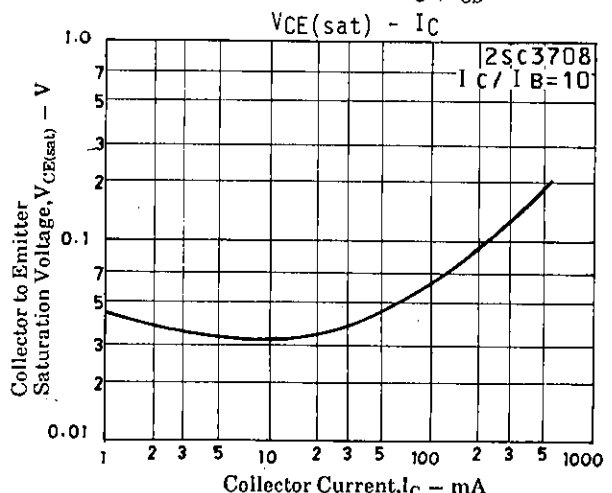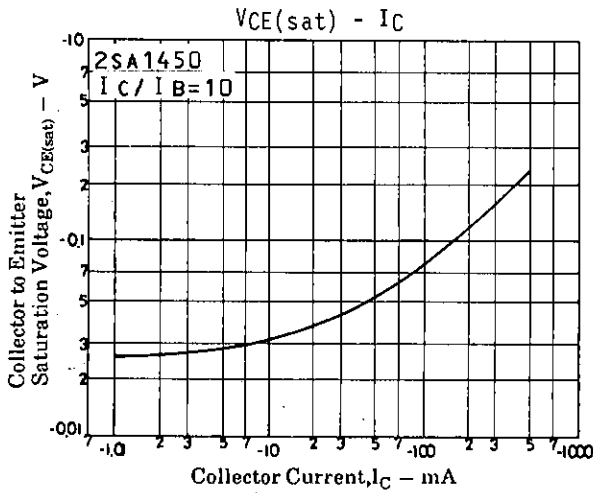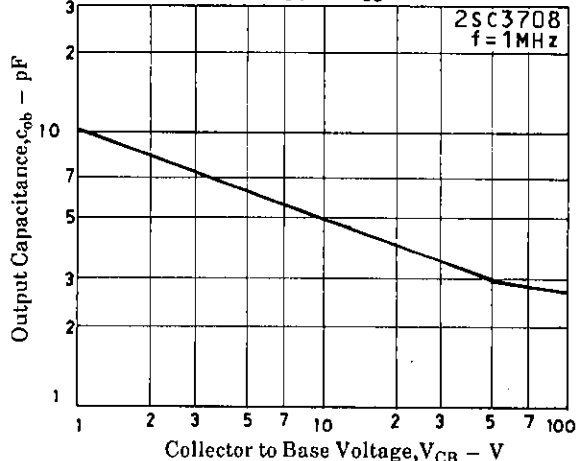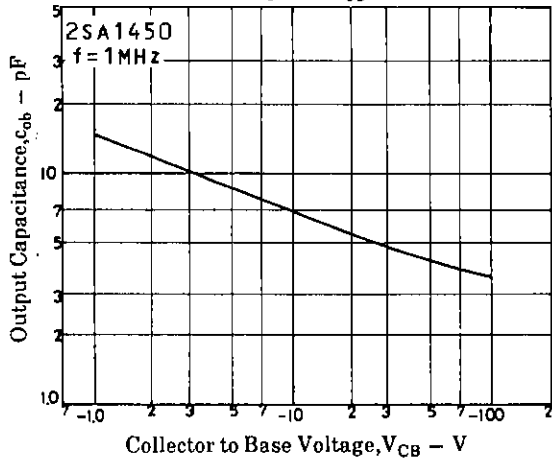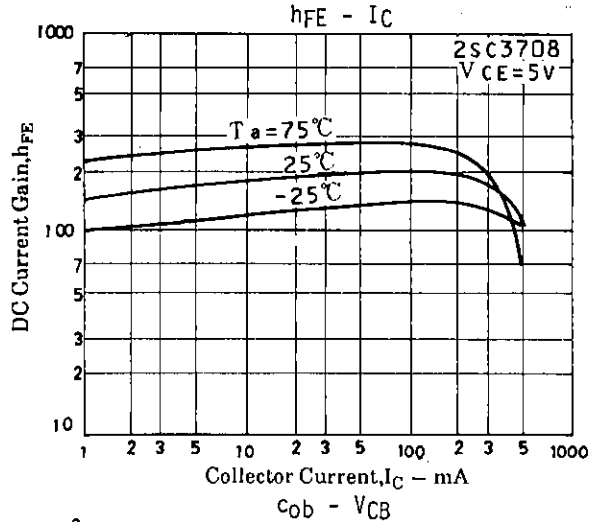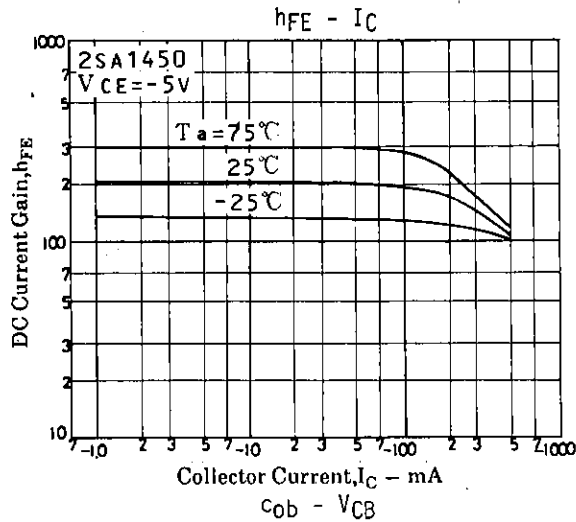

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.