

Descriptions

- Switching application
- Interface circuit and driver circuit application

Features


- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process
- High packing density

Ordering Information

| Type NO. | Marking | Package Code |
|----------|---------|--------------|
| SRA2204S | RA4 | SOT-23 |

Outline Dimensions

unit : mm

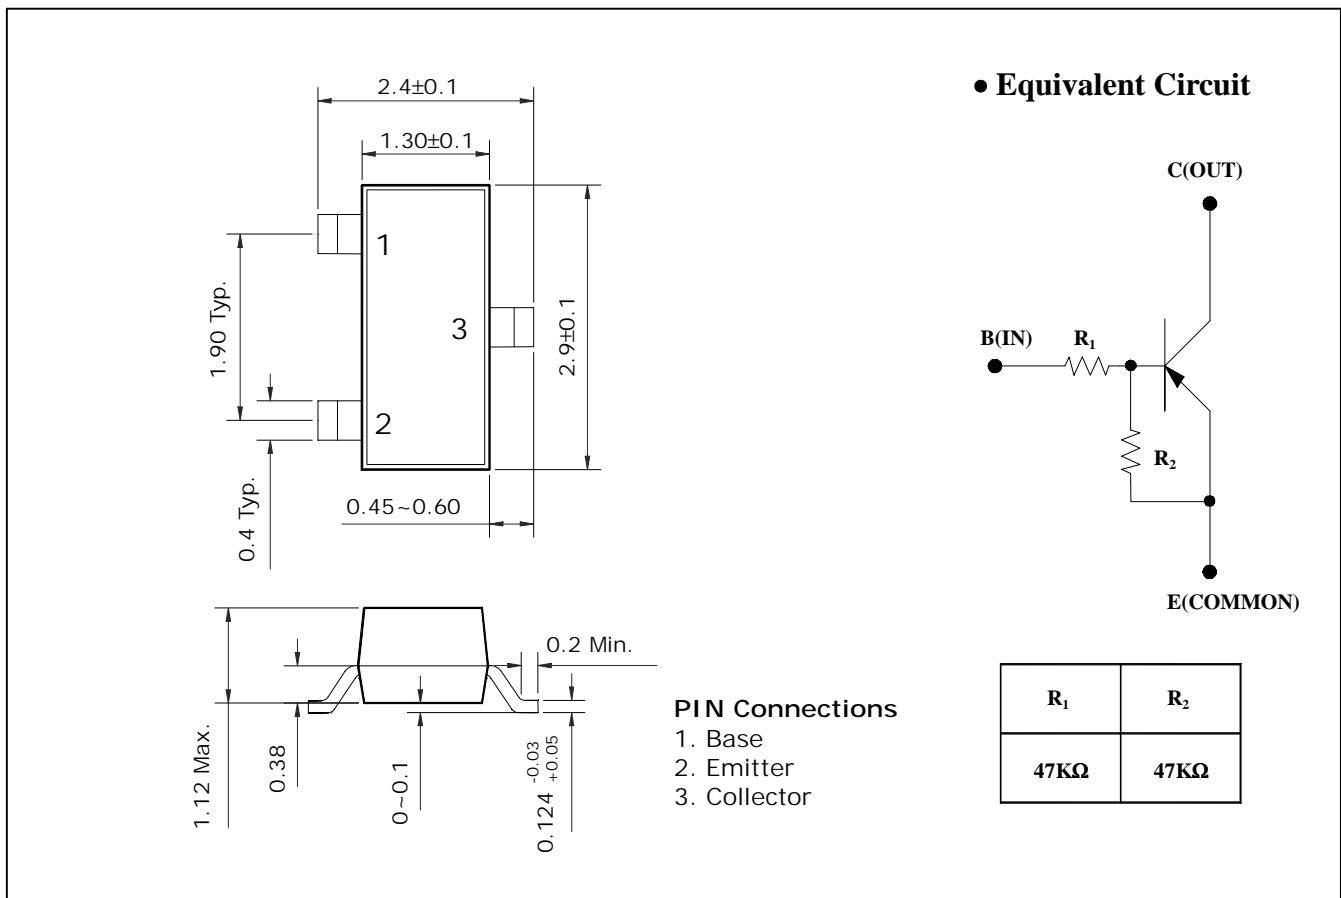

Absolute maximum ratings

(Ta=25°C)

| Characteristic | Symbol | Ratings | Unit |
|----------------------|-----------|-----------|------|
| Out Voltage | V_o | -50 | V |
| Input Voltage | V_i | -40 | V |
| Out Current | I_o | -100 | mA |
| Power Dissipation | P_D | 200 | mW |
| Junction Temperature | T_J | 150 | °C |
| Storage Temperature | T_{STG} | -55 ~ 150 | °C |

Electrical Characteristics

(Ta=25°C)

| Characteristic | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------------|-----------------------------|------|------|-------|------|
| Output Cut-off Current | $I_{O(OFF)}$ | $V_o = -50V, V_i = 0$ | - | - | -500 | nA |
| DC Current Gain | G_I | $V_o = -5V, I_o = -10mA$ | 80 | 200 | - | - |
| Output Voltage | $V_{O(ON)}$ | $I_o = -10mA, I_i = -0.5mA$ | - | -0.1 | -0.3 | V |
| Input Voltage (ON) | $V_{I(ON)}$ | $V_o = -0.2V, I_o = -5mA$ | - | -2.8 | -5.0 | V |
| Input Voltage (OFF) | $V_{I(OFF)}$ | $V_o = -5V, I_o = -0.1mA$ | -1.0 | -1.2 | - | V |
| Transition Frequency | f_T^* | $V_o = -10V, I_o = -5mA$ | - | 200 | - | MHz |
| Input Current | I_i | $V_i = -5V$ | - | - | -0.18 | mA |

* : Characteristic of Transistor Only

Electrical Characteristic Curves

Fig. 1 $I_o - V_{I(ON)}$

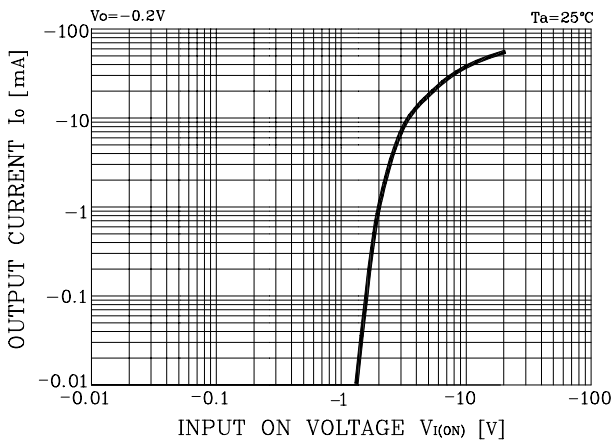


Fig. 2 $I_o - V_{I(OFF)}$

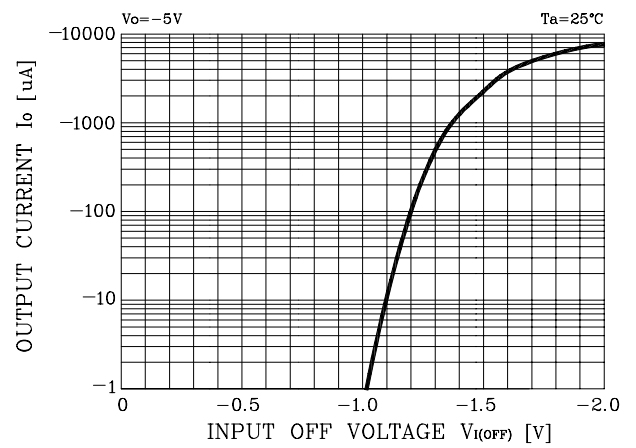


Fig. 3 $G_I - I_o$

