

## Axial lead diode

### Standard silicon rectifier diodes

#### BY 3060

**Forward Current: 3 A**

**Reverse Voltage: 600 to 600 V**

#### Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0

#### Mechanical Data

- Plastic case DO-201
- Weight approx.: 1 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 1700 pieces per ammo

1) Valid, if leads are kept at ambient temperature at a distance of 10 mm from case


2)  $I_F = 3 \text{ A}$ ,  $T_j = 25^\circ\text{C}$

3)  $T_A = 25^\circ\text{C}$

Type	Repetitive peak reverse voltage	Surge peak reverse voltage	Max. reverse recovery time	Max. forward voltage
BY 3060	$V_{RRM}$ V 600	$V_{RSM}$ V 700	$I_F = - \text{A}$ $I_R = - \text{A}$ $I_{RR} = - \text{A}$ $t_{rr}$ ns	$V_F^{2)}$ 1,1

Absolute Maximum Ratings		$T_c = 25^\circ\text{C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
$I_{FAV}$	Max. averaged fwd. current, R-load, $T_A = 50^\circ\text{C}$ <sup>1)</sup>	3	A
$I_{FRM}$	Repetitive peak forward current $f > 15 \text{ Hz}$ <sup>1)</sup>	50	A
$I_{FSM}$	Peak forward surge current 50 Hz half sinus-wave <sup>3)</sup>	250	A
$i^2t$	Rating for fusing, $t < 10 \text{ ms}$ <sup>3)</sup>	310	A <sup>2</sup> s
$R_{thA}$	Max. thermal resistance junction to ambient <sup>1)</sup>	25	K/W
$R_{thT}$	Max. thermal resistance junction to terminals <sup>1)</sup>	-	K/W
$T_j$	Operating junction temperature	-50...+150	°C
$T_s$	Storage temperature	-50...+175	°C

Characteristics		$T_c = 25^\circ\text{C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
$I_R$	Maximum leakage current, $T_j = 25^\circ\text{C}$ ; $V_R = V_{RRM}$	<10	µA
	$T_j = ^\circ\text{C}$ ; $V_R = V_{RRM}$		
$C_j$	Typical junction capacitance (at MHz and applied reverse voltage of V)	-	pF
$Q_{rr}$	Reverse recovery charge ( $U_R = V$ ; $I_F = A$ ; $dI_F/dt = A/ms$ )	-	µC
$E_{RSM}$	Non repetitive peak reverse avalanche energy ( $I_R = \text{mA}$ ; $T_j = ^\circ\text{C}$ ; inductive load switched off)	-	mJ

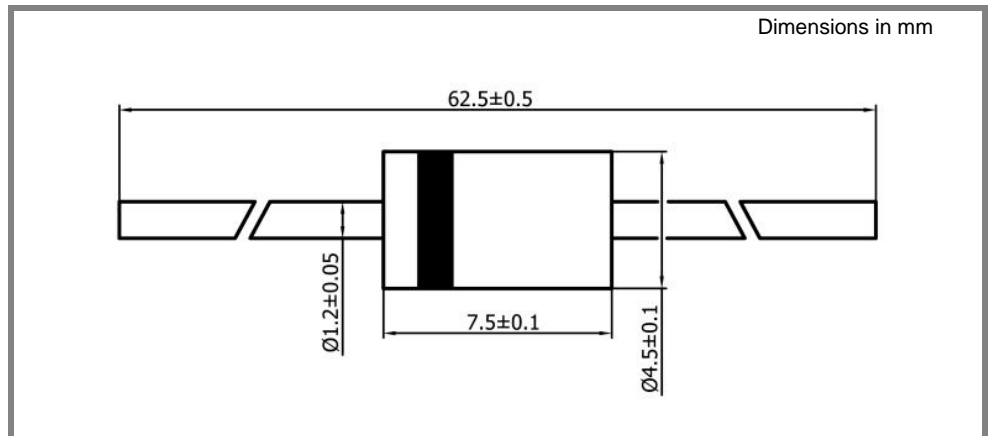

case: DO-201

