



Technical Data Sheet (Preliminary)

Full Color Side View LEDs (Height 0.8mm)

99-135/RSGHB7C-C06/2D

Features

- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Inter reflector.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (12mm Tape)
- Pb-free
- The product itself will remain within RoHS compliant version.



Descriptions

- The 99-135 series is available in soft red, green and blue.
Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications






- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.

Device Selection Guide


Chip			Lens Color
Type	Material	Emitted Color	
RS	AlGaInP	Brilliant Red	Water Clear
GH	InGaN	Brilliant Green	
B7	InGaN	Blue	

99-135/RSGHB7C-C06/2D

Package Outline Dimensions

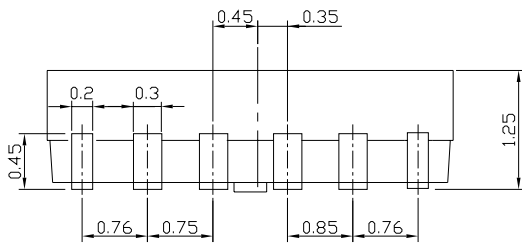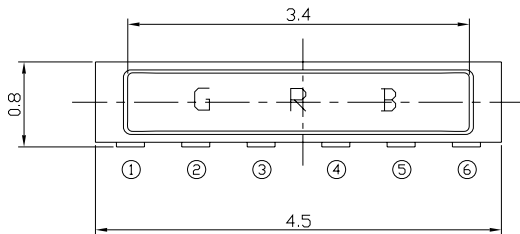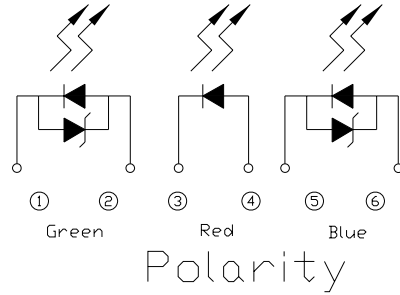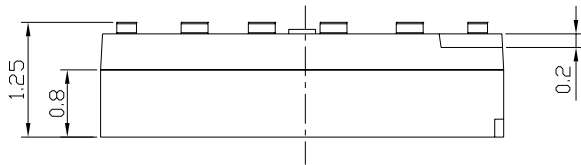

Recommended soldering pad design

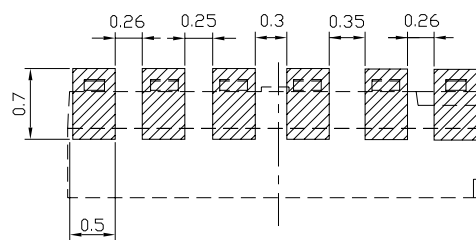

Note: The tolerances unless mentioned is $\pm 0.1\text{mm}$;Unit = mm

99-135/RSGHB7C-C06/2D
Absolute Maximum Ratings (Ta=25°C)







Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_F	RS	50
		GH	30
		B7	30
Peak Forward Current(Duty 1/10@ 1KHZ)	I_{FP}	RS	100
		GH	100
		B7	100
Power Dissipation	P_d	RS	130
		GH	110
		B7	110
Electrostatic Discharge(HBM)	ESD	RS	2000
		GH	2000
		B7	2000
Operating Temperature	T_{opr}	-40 ~ +85	°C
Storage Temperature	T_{stg}	-40~ +90	°C
Soldering Temperature	T_{sol}	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	

99-135/RSGHB7C-C06/2D**Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _v	RS	50	80	-----	mcd I _F =5mA
		GH	200	300	-----	
		B7	20	40	-----	
Viewing Angle	2θ 1/2	-----	120	-----	deg	I _F =5mA
Peak Wavelength	λ _p	RS	-----	632	-----	nm I _F =5mA
		GH	-----	518	-----	
		B7	-----	468	-----	
Dominant Wavelength	λ _d	RS	-----	625	-----	nm I _F =5mA
		GH	-----	530	-----	
		B7	-----	460	-----	
Spectrum Radiation Bandwidth	Δλ	RS	-----	20	-----	nm I _F =5mA
		GH	-----	36	-----	
		B7	-----	26	-----	
Forward Voltage	V _F	RS	-----	1.8	2.4	V I _F =5mA
		GH	-----	3.0	3.7	
		B7	-----	3.0	3.7	
Reverse Current	I _R	RS	-----	-----	10	μA V _R =5V







99-135/RSGHB7C-C06/2D

Typical Electro-Optical Characteristics Curves(RS)

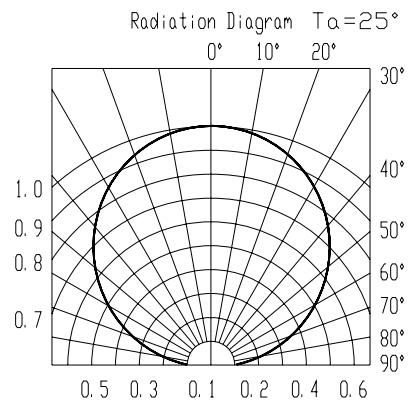
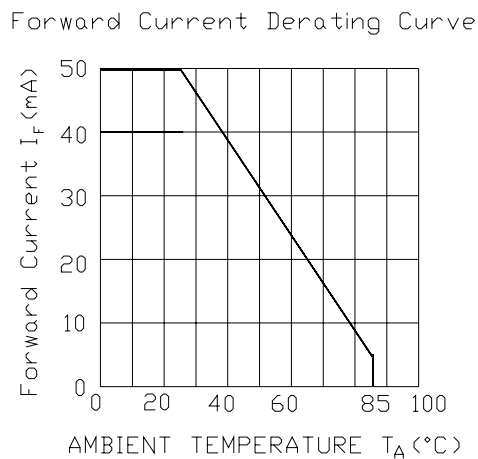
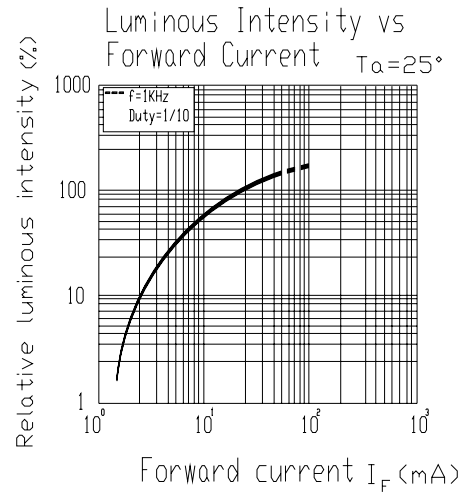
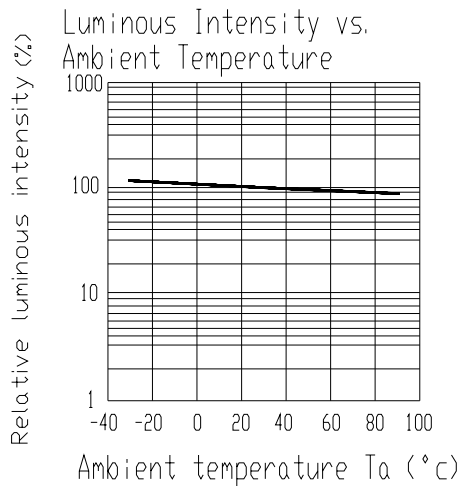
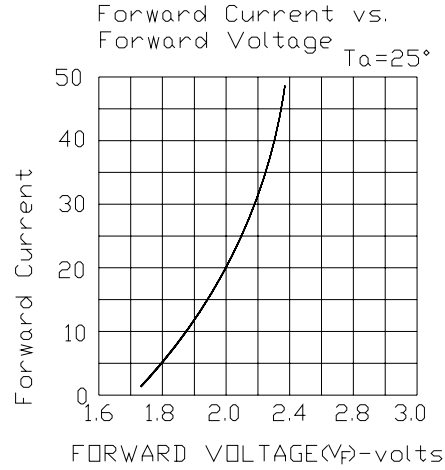
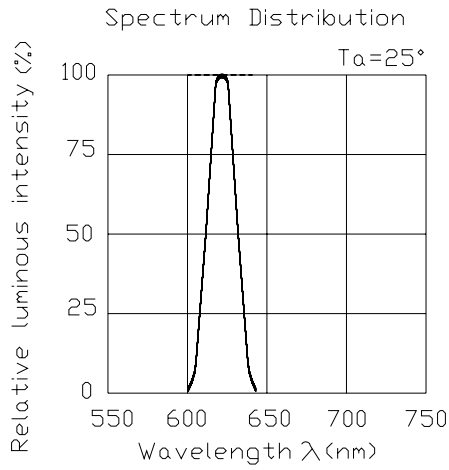


99-135/RSGHB7C-C06/2D

Typical Electro-Optical Characteristics Curves(GH)

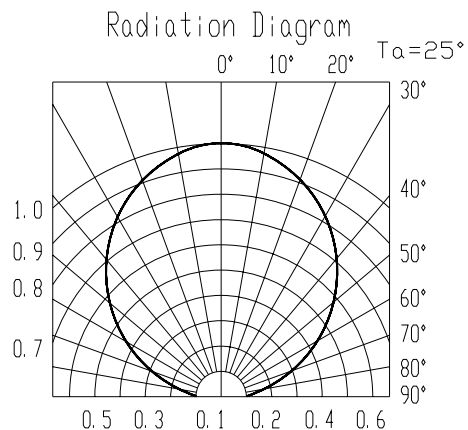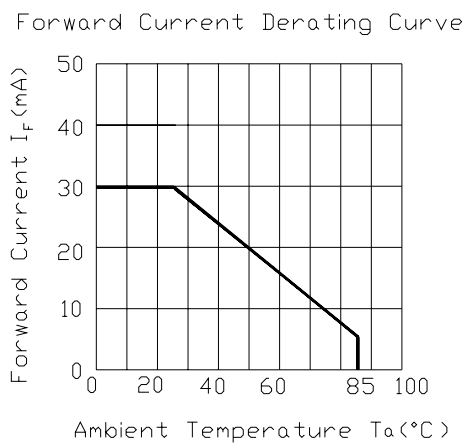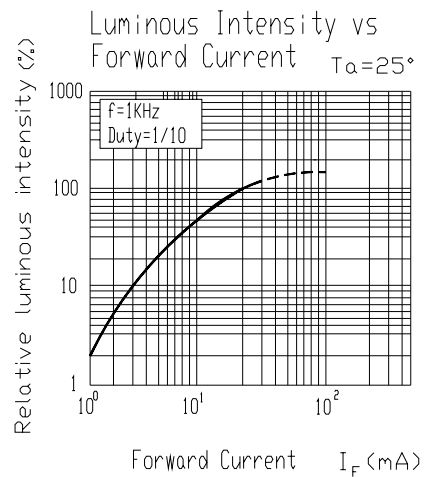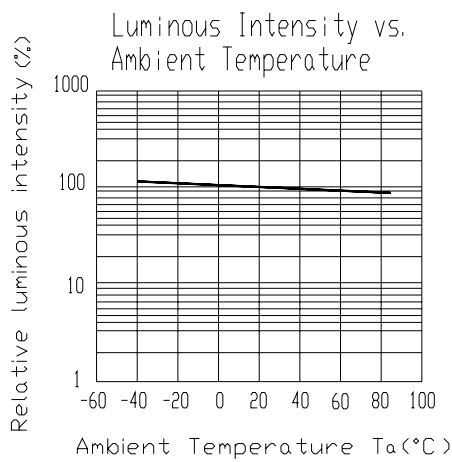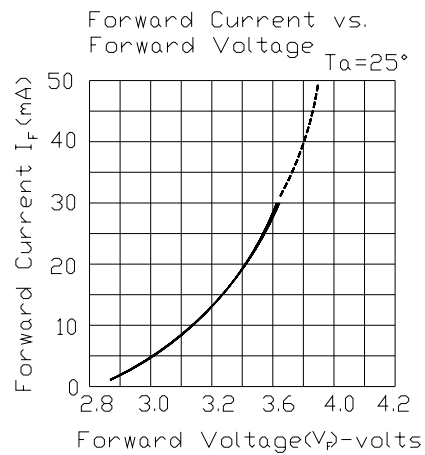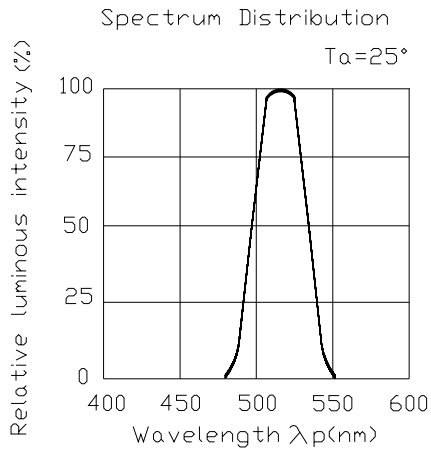

Typical Electro-Optical Characteristics Curves(B7)

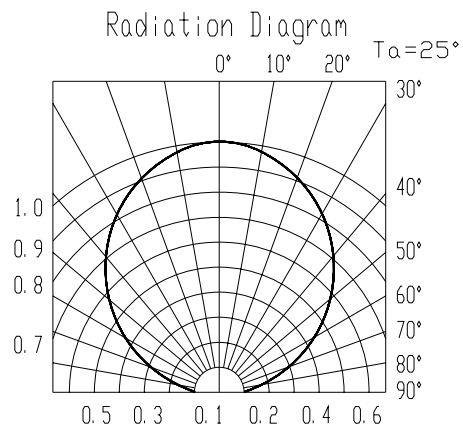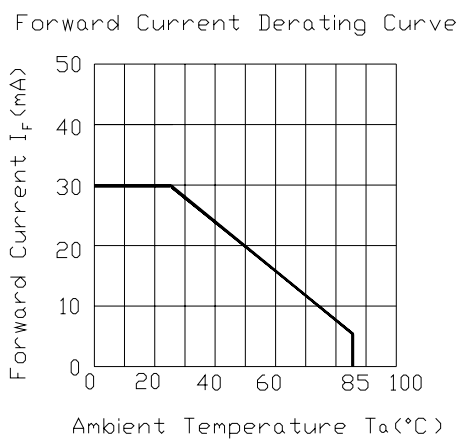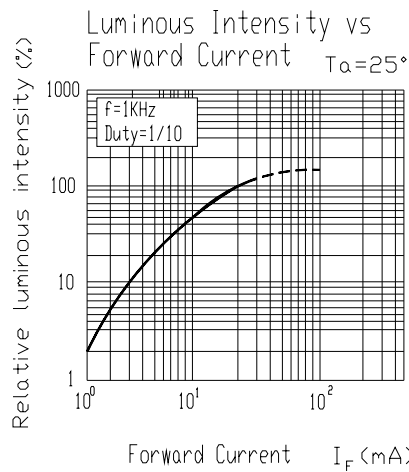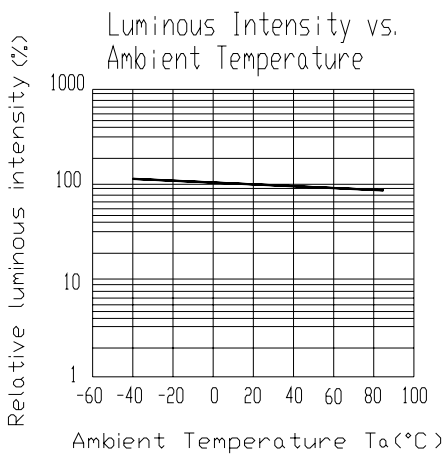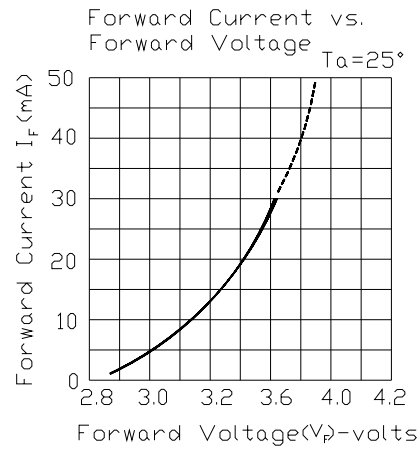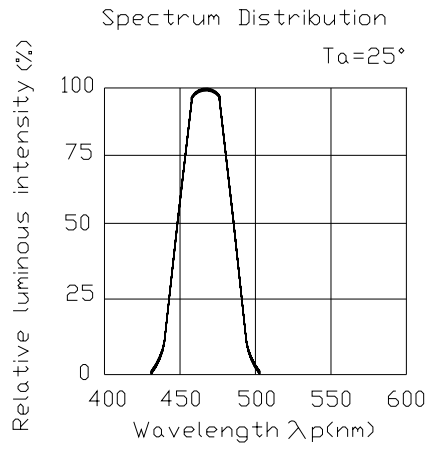

99-135/RSGHB7C-C06/2D

Label explanation

- CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank**
- REF: Forward Voltage Rank**

EVERLIGHT

CPN: XXXXXX
P/N: XXXXXX

RoHS


XXXXXXXXXXXXXXXXXXXX
QTY: XXXX

LOT NO: XXXXXXXXXXXX

CAT:
HUE:
REF:

MADE IN TAIWAN


Reel Dimensions

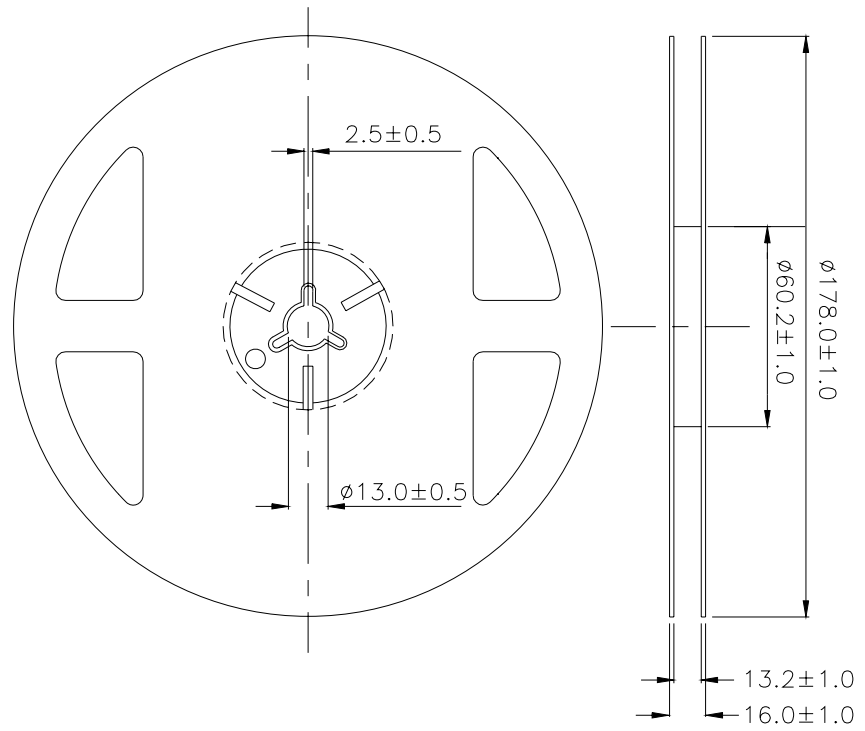

Note: Tolerances Unless Dimension ±0.1mm ,Unit = mm


99-135/RSGHB7C-C06/2D

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

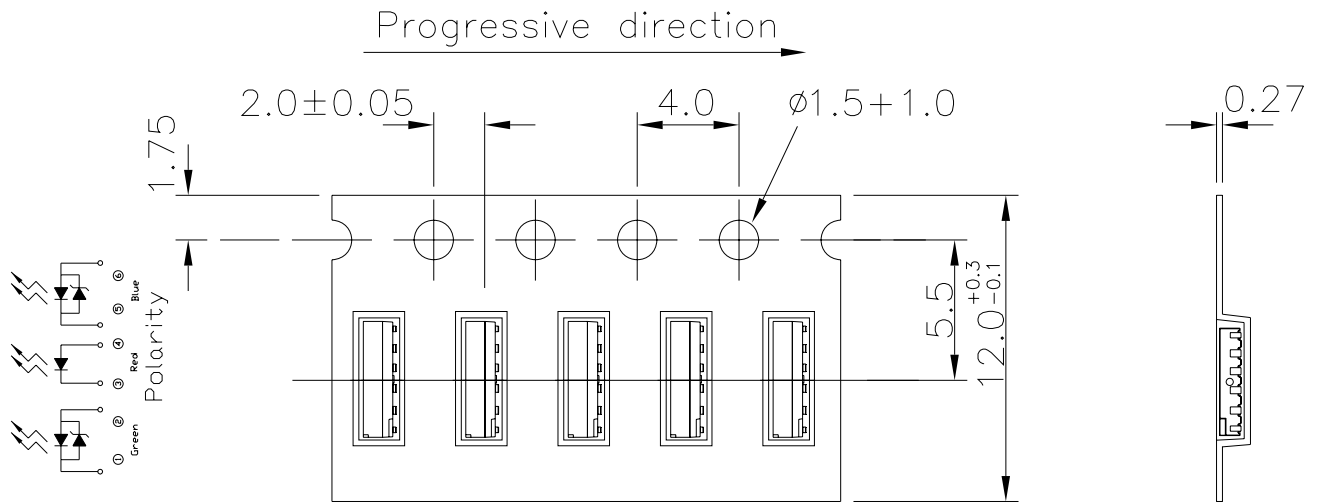

Note: 1.Tolerances Unless Dimension $\pm 0.1\text{mm}$ Unit = mm

Moisture Resistant Packaging

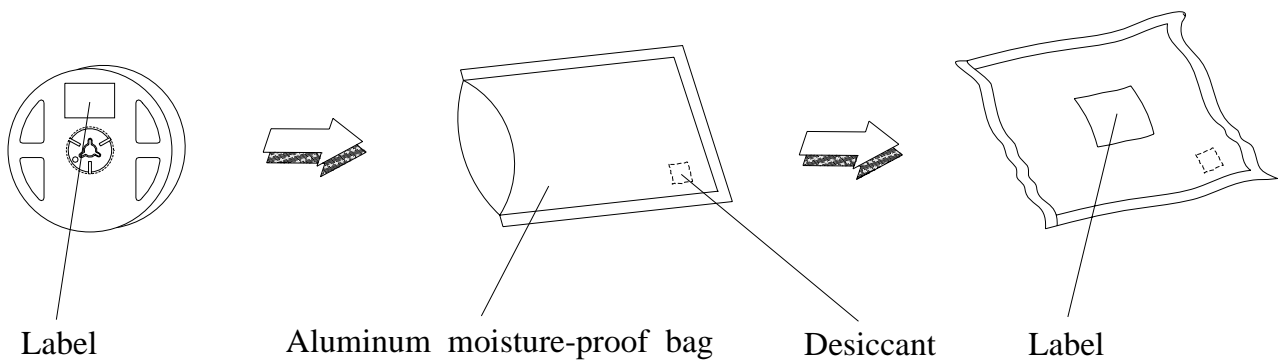

99-135/RSGHB7C-C06/2D**Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 10sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	I _F = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/RH85%	1000 Hrs.	22 PCS.	0/1

99-135/RSGHB7C-C06/2D

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.

2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less.


If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

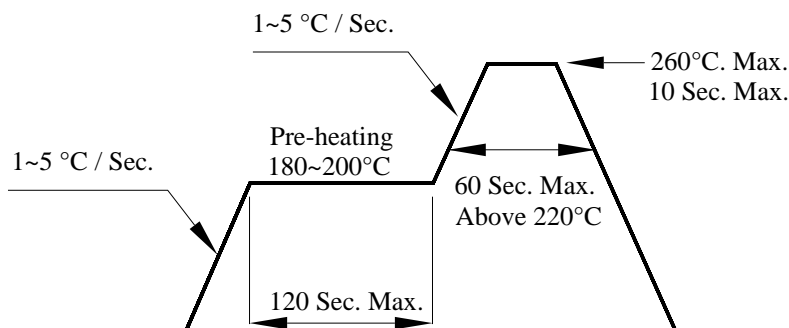

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.


4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

99-135/RSGHB7C-C06/2D

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

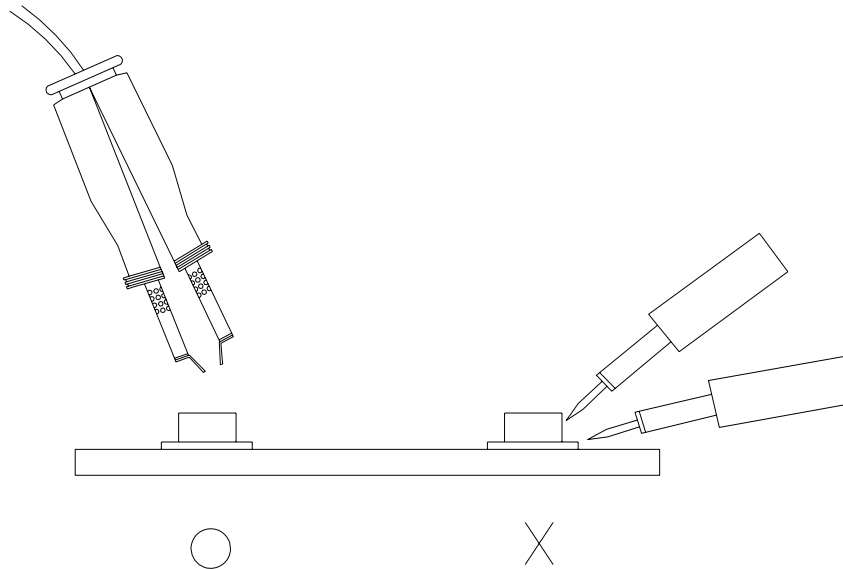

EVERLIGHT ELECTRONICS CO., LTD.
Office: No 25, Lane 76, Sec 3, Chung Yang Rd,
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936
Fax: 886-2267-6244, 2267-6189, 2267-6306
<http://www.everlight.com>