



The Infinite Bandwidth Company™

MIC811/812

Microprocessor Reset Circuits

Final Information

General Description

The MIC811 and MIC812 are inexpensive microprocessor supervisory circuit that monitors power supplies in microprocessor based systems.

The function of this device is to assert a reset if either the power supply drops below a designated reset threshold level or /MR is forced low. Several different reset threshold levels are available to accommodate 3V, 3.3V or 5V powered systems.

The MIC811 has an active low /RESET output, while the MIC812 offers an active high RESET output. The reset output is guaranteed to remain asserted for a minimum of 140ms after V_{CC} has risen above the designed reset threshold level. The MIC811/812 comes in a 4-pin SOT-143 package.

Features

- Precision voltage monitor for 3V, 3.3V or 5V power supplies
- /RESET remains valid with V_{CC} as low as 1.4V
- <15µA supply current
- 140ms minimum reset pulse width available
- Manual reset input
- Available in 4-pin SOT-143 package


Applications

- Portable equipment
- Intelligent instruments
- Critical microprocessor power monitoring
- Printers/computers
- Embedded controllers



Ordering Information

| Part Number | Marking | Threshold Voltage | Operating Temp. Range | Package |
|-------------|---------|-------------------|-----------------------|----------------|
| MIC811LU | KL | 4.63 | -40°C to +85°C | 4-lead SOT-143 |
| MIC811MU | KM | 4.38 | -40°C to +85°C | 4-lead SOT-143 |
| MIC811JU | KJ | 4.00 | -40°C to +85°C | 4-lead SOT-143 |
| MIC811TU | KT | 3.08 | -40°C to +85°C | 4-lead SOT-143 |
| MIC811SU | KS | 2.93 | -40°C to +85°C | 4-lead SOT-143 |
| MIC811RU | KR | 2.63 | -40°C to +85°C | 4-lead SOT-143 |
| MIC812LU | LL | 4.63 | -40°C to +85°C | 4-lead SOT-143 |
| MIC812MU | LM | 4.38 | -40°C to +85°C | 4-lead SOT-143 |
| MIC812JU | LJ | 4.00 | -40°C to +85°C | 4-lead SOT-143 |
| MIC812TU | LT | 3.08 | -40°C to +85°C | 4-lead SOT-143 |
| MIC812SU | LS | 2.93 | -40°C to +85°C | 4-lead SOT-143 |
| MIC812RU | LR | 2.63 | -40°C to +85°C | 4-lead SOT-143 |

Typical Application

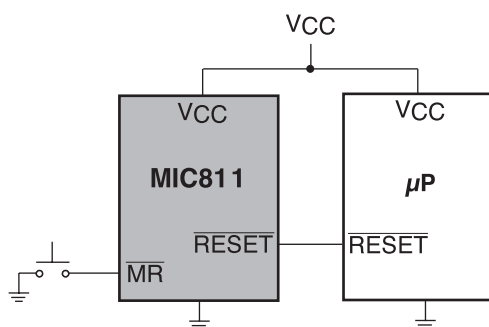

Pin Configuration

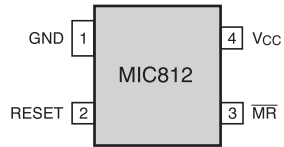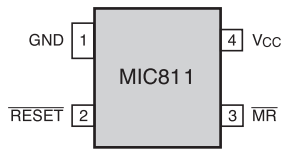

MIC811 4-Lead SOT-143
MIC812 4-Lead SOT-143

Pin Description

| Pin Number MIC811 | Pin Number MIC812 | Pin Name | Pin Function |
|----------------------|----------------------|----------|---|
| 1 | 1 | GND | IC Ground Pin |
| 2 | N/A | /RESET | /RESET goes low if V_{CC} falls below the reset threshold and remains asserted for one reset timeout period (140ms min.) after V_{CC} exceeds the reset threshold |
| N/A | 2 | RESET | RESET goes high if V_{CC} falls below the reset threshold and remains asserted for one reset timeout period (140ms min.) after V_{CC} exceeds the reset threshold |
| 3 | 3 | /MR | Manual Reset Input. A logic low on /MR forces a reset. The reset will remain asserted as long as /MR is held low and for one reset timeout period (140ms min.) after /MR goes high. This input can be shorted to ground via a switch or driven from CMOS or TTL logic. Float if unused. |
| 4 | 4 | VCC | Power Supply Input. |

Absolute Maximum Ratings(Note 1)

| | |
|---------------------------------------|----------------|
| Terminal Voltage (V_{CC}) | -0.3V to +6.0V |
| Input Current (V_{CC} , /MR) | 20mA |
| Output Current (/RESET, RESET) | 20mA |
| Lead Temperature (soldering, 10 sec.) | 300°C |
| Storage Temperature (T_S) | -65°C to 150°C |
| Rate of Rise (V_{CC}) | 100V/ μ s |
| ESD Rating, Note 3 | |

Operating Ratings(Note 2)

| | |
|---|---------------|
| Operating Temperature Range | |
| MIC811 | -40°C to 85°C |
| MIC812 | -40°C to 85°C |
| Power Dissipation ($T_A = +70^\circ\text{C}$) | 320mW |

Electrical Characteristics

For typical values, $V_{CC} = 5\text{V}$ for MIC8_L/M/J, $V_{CC} = 3.3\text{V}$ for MIC8_S/T, $V_{CC} = 3\text{V}$ for MIC8_R; $T_A = 25^\circ\text{C}$, **bold** values indicate $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$; unless noted


| Symbol | Parameter | Condition | Min | Typ | Max | Units |
|-----------|-------------------------|--|--|------|--|------------------|
| V_{CC} | Operating Voltage Range | $T_A = 0^\circ\text{C}$ to 70°C | 1.4 | | 5.5 | V |
| | | $T_A = -40^\circ\text{C}$ to 85°C | 1.6 | | 5.5 | V |
| I_{CC} | Supply Current | MIC811L/M/J, MIC812L/M/J | | 9 | 15 | μA |
| | | $V_{CC} < 3.6\text{V}$, MIC811R/S/T, MIC812R/S/T | | 6 | 10 | μA |
| V_{TH} | Reset Voltage Threshold | MIC811L, MIC812L | 4.50 | 4.63 | 4.75 | V |
| | | MIC811M, MIC812M | 4.25 | 4.38 | 4.50 | V |
| | | MIC811J, MIC812J | 3.89 | 4.00 | 4.10 | V |
| | | MIC811T, MIC812T | 3.00 | 3.08 | 3.15 | V |
| | | MIC811S, MIC812S | 2.85 | 2.93 | 3.00 | V |
| | | MIC811R, MIC812R | 2.55 | 2.63 | 2.70 | V |
| t_{RST} | Reset Timeout Period | | 140 | 240 | 560 | ms |
| V_{OH} | /RESET Output Voltage | $I_{SOURCE} = 800\mu\text{A}$, MIC811L/M/J | $V_{CC} - 1.5\text{V}$ | | | V |
| | | $I_{SOURCE} = 500\mu\text{A}$, MIC811R/S/T | $0.8 \times V_{CC}$ | | | V |
| V_{OL} | /RESET Output Voltage | $V_{CC} = V_{TH}$ min., $I_{SINK} = 3.2\text{mA}$, MIC811L/M/J | | | 0.4 | V |
| | | $V_{CC} = V_{TH}$ min., $I_{SINK} = 1.2\text{mA}$, MIC811R/S/T | | | 0.3 | V |
| | | $V_{CC} > 1.4\text{V}$, $I_{SINK} = 50\mu\text{A}$, $T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$ | | | 0.3 | V |
| | | $V_{CC} > 1.6\text{V}$, $I_{SINK} = 50\mu\text{A}$, $T_A = -40^\circ$ to $+85^\circ\text{C}$ | | | 0.3 | V |
| V_{OH} | RESET Output Voltage | $1.8\text{V} < V_{CC} < V_{TH}$ min., $I_{SOURCE} = 150\mu\text{A}$ | $0.8 \times V_{CC}$ | | | V |
| V_{OL} | RESET Output Voltage | $I_{SINK} = 3.2\text{mA}$, MIC812L/M/J | | | 0.4 | V |
| | | $I_{SINK} = 1.2\text{mA}$, MIC812R/S/T | | | 0.3 | V |
| | /MR Minimum Pulse Width | | 10 | | | μs |
| | /MR to Reset Delay | | | 0.5 | | μs |
| V_{IH} | /MR Input Threshold | $V_{CC} > V_{TH}$ max., MIC81_L/M/J | 2.3 | | | V |
| | | MIC81_R/S/T | $0.7 \times V_{CC}$ | | | V |
| V_{IL} | /MR Input Threshold | $V_{CC} \cdot V_{TH}$ max., MIC81-L/M/_ | | | 0.8 | V |
| | | MIC81_R/S/T | | | $0.25 \times V_{CC}$ | |
| | /MR Pull-Up Resistance | | 10 | 20 | 30 | $\text{k}\Omega$ |
| | /MR Glitch Immunity | | | 100 | | ns |

Note 1. Exceeding the absolute maximum rating may damage the device.


Note 2. The device is not guaranteed to function outside its operating rating.

Note 3. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.

Timing Diagram

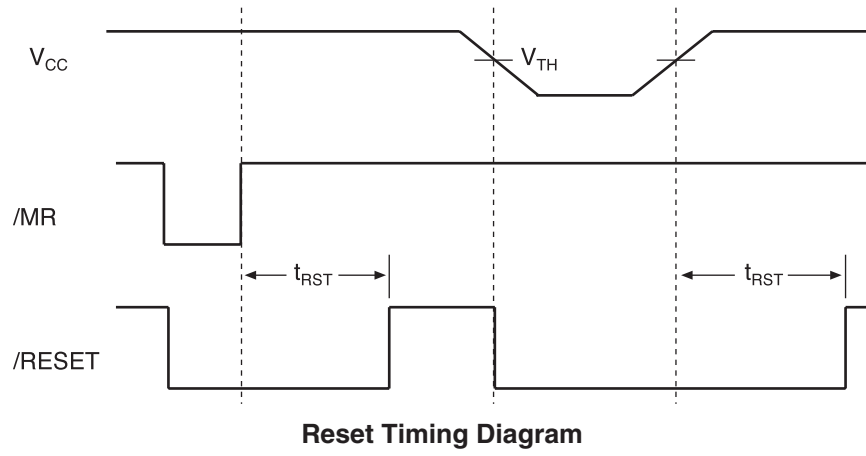

Functional Diagram

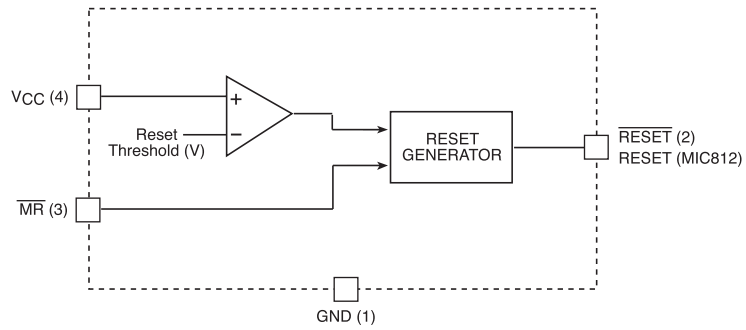

Applications Information

Microprocessor Reset

The /RESET (or RESET) pin is asserted whenever V_{CC} falls below the reset threshold voltage. The /RESET pin remains asserted for a period of 140ms after V_{CC} has risen above the reset threshold voltage. The reset function ensures the microprocessor is properly reset and powers up in a known condition after a power failure. /RESET will remain valid with V_{CC} as low as 1.4V.

V_{CC} Transients


The MIC811/812 are relatively immune to negative-going V_{CC} glitches below the reset threshold. Typically, a negative-going transient 125mV below the reset threshold with a duration of 50 μ s (25 μ s for MIC8_R/S/T) or less will not cause a reset.

Interfacing to Bidirectional Reset Pins


The MIC811/812 can interface with μ Ps with bidirectional reset pins by connecting a 4.7k Ω resistor in series with the MIC811/812 output and the μ P reset pin.

/RESET Valid at Low Voltage

A resistor can be added from the /RESET pin to ground to ensure the /RESET output remains low with V_{CC} down to 0V. A 100k Ω resistor connected from the /RESET to ground is recommended. The size of the resistor should be large enough not to load the output excessively and small enough to pull-down any stray leakage currents.

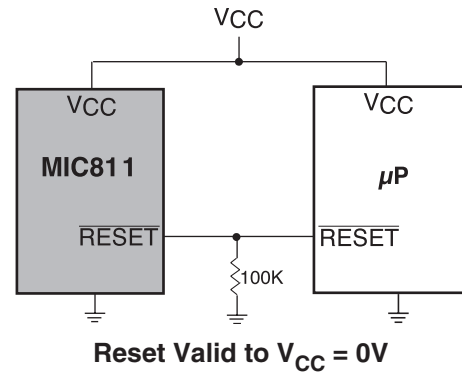

Package Information

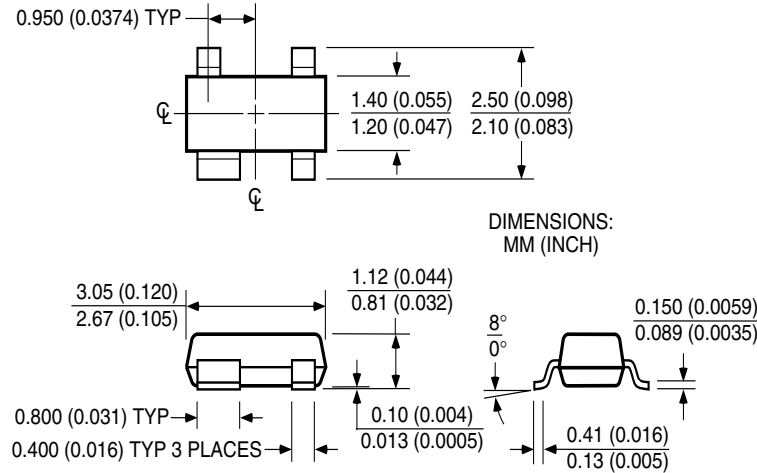

4-lead SOT-143 (M3)

MICREL, INC. 1849 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 944-0970 WEB <http://www.micrel.com>

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2003 Micrel, Incorporated.