


THIS DOCUMENT AND THE DATA DISCLOSED  
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,  
USED, OR DISCLOSED IN WHOLE OR IN PART  
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

LTR.	DESCRIPTION	DATE	APP'D.
3	RELEASED PER ECO #2212	J.W. 10/11/90	BJR

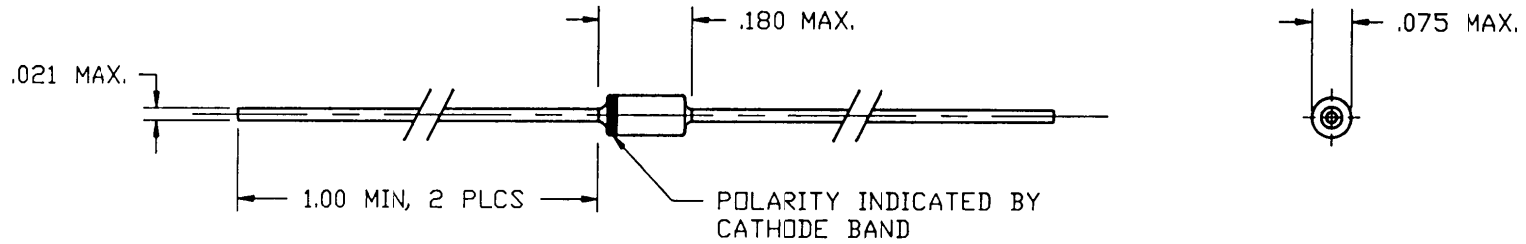

ELECTRICAL SPECIFICATIONS

PKG TYPE	V <sub>RRM</sub> (V)	I <sub>R</sub> (nA) @ V <sub>R</sub> (V)	V <sub>F</sub> (V) @ I <sub>F</sub> (mA)	t <sub>rr</sub> (ns)	TEST CONDITIONS
DO-35	100 MIN	25      20	1.0 MAX    10	4	I <sub>F</sub> =10mA, I <sub>R</sub> =10mA, R <sub>L</sub> =100Ω, I <sub>rr</sub> =1.0mA

**COPY**

**VICOR** ANDOVER, MA. U.S.A.

DRAWN:	4/90	<b>SWITCHING DIODE, DO-35</b>	
CHECKED:			
APP'D:			
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) DO NOT SCALE DRAWING	TOLERANCES (EXCEPT AS NOTED)	DRAWING NO.	REV.
	.XX ± .01 .XXX ± .006 FRACT ± 1/64 ANGLES ± 1°	02550	3
NEXT ASSY:	SCALE 4:1	SHEET 1 OF 1	