

### Linear Systems replaces discontinued Siliconix J502

The Linear Systems J502 is a  $\pm 20\%$  range current regulator

The J502 is a  $\pm 20\%$  range current regulator designed for demanding applications in test equipment and instrumentation. The J502 utilizes JFET techniques to produce a single two-lead device which is extremely simple to operate.

- Two-Lead Plastic Package
- Guaranteed  $\pm 20\%$  Tolerance
- Operation up to 50V
- Excellent Temperature Stability
- Simple Series Circuitry, No Separate Voltage Source
- Tight Guaranteed Circuit Performance
- Excellent Performance in Low-Voltage/Battery Circuits and High-Voltage Spike Protection
- High Circuit Stability vs. Temperature

#### J502 Applications:

- Constant-Current Supply
- Current-Limiting
- Timing Circuits

#### FEATURES

REPLACEMENT SOURCE FOR SILICONIX J502

WIDE CURRENT RANGE 0.43mA  $\pm$  20%

BIASING NOT REQUIRED  $V_{GS} = 0V$

#### ABSOLUTE MAXIMUM RATINGS<sup>1</sup>

@ 25 °C (unless otherwise stated)

#### Maximum Temperatures

Storage Temperature -55 to 150°C

Junction Operating Temperature -55 to 135°C

#### Maximum Power Dissipation

Continuous Power Dissipation @125°C 360mW

#### Maximum Currents

Forward Current 20mA

Reverse Current 50mA

#### Maximum Voltages

Peak Operating Voltage  $P_{OV} = 50V$


#### ELECTRICAL CHARACTERISTICS @ 25 °C (unless otherwise stated)

SYMBOL	CHARACTERISTIC	MIN	TYP	MAX	UNITS	CONDITIONS
$P_{OV}$	Peak Operating Voltage <sup>2</sup>	50			V	$I_F = 1.1I_{F(max)}$
$V_R$	Reverse Voltage		0.8		V	$I_R = 1mA$
$C_F$	Forward Capacitance		2.2		pF	$V_F = 25V, f = 1MHz$

#### SPECIFIC ELECTRICAL CHARACTERISTICS @ 25 °C (unless otherwise stated)

PART	Forward Current <sup>3</sup> $I_F$			Dynamic Impedance <sup>4</sup> $Z_d$		Knee Impedance $Z_k$	Limiting Voltage <sup>5</sup> $V_L$	
	$V_F = 25V$			$V_F = 25V$		$V_F = 6V$	$I_F = 0.8I_{F(min)}$	
	MIN	NOM	MAX	MIN	TYP	TYP	TYP	MAX
J502	0.344	0.43	0.516	1.50	7	1.10	1.5	0.6

#### V-I CHARACTERISTICS CURRENT REGULATING DIODE

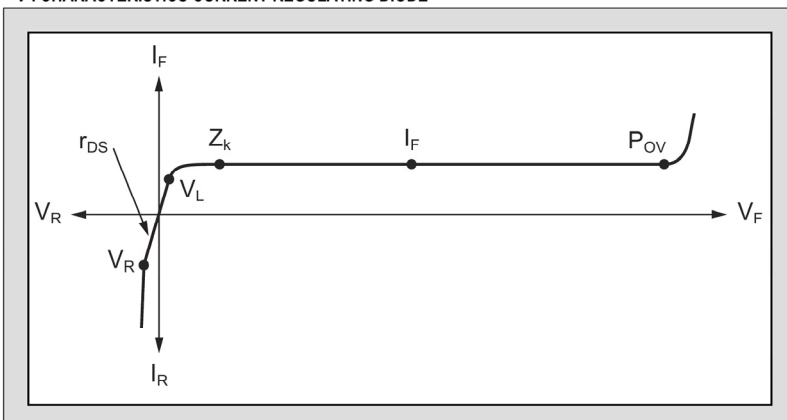



#### Notes:

1. Absolute maximum ratings are limiting values above which serviceability may be impaired.
2. Pulsed,  $t = 2ms$ . Maximum  $V_F$  where  $I_F < 1.1I_{F(max)}$ .
3. Pulsed,  $t = 2ms$ . Continuous currents may vary.
4. Pulsed,  $t = 2ms$ . Continuous impedances may vary.
5. Min  $V_F$  required to ensure  $I_F = 0.8I_{F(min)}$ .

Available Packages:

TO-92  
BOTTOM VIEW

TO-92  
Bare Die.

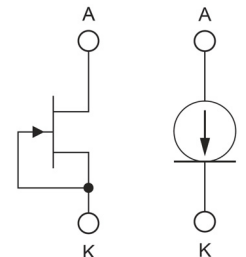

Please contact Micross for full package and die dimensions

Micross Components Europe



Tel: +44 1603 788967

Email: [chipcomponents@micross.com](mailto:chipcomponents@micross.com)

Web: <http://www.micross.com/distribution>

Information furnished by Linear Integrated Systems and Micross Components is believed to be accurate and reliable. However, no responsibility is assumed for its use; nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Linear Integrated Systems.