

$I_{PN} = 50 \dots 600A, V_{out} = \pm 4V$

Features

- ◆ Hall effect measuring principle
- ◆ Galvanic isolation between primary and secondary circuit
- ◆ Compact design for PCB mounting
- ◆ Low power consumption
- ◆ Extended measuring range ($3 \cdot I_{PN}$)
- ◆ Insulated plastic case recognized according to UL 94-V0

Advantages

- ◆ Easy installation
- ◆ Excellent accuracy
- ◆ No insertion losses
- ◆ Excellent performance and price
- ◆ Only one design for wide current ratings range
- ◆ High immunity to external interference

Industrial applications

- ◆ Static converters for DC motor drives
- ◆ Switched Mode Power Supplies (SMPS)
- ◆ AC variable speed drives
- ◆ Uninterruptible Power Supplies (UPS)
- ◆ Battery supplied applications
- ◆ Power supplies for welding application

TYPES OF PRODUCTS		
Type	Primary nominal current r. m. s I_{PN} (A)	Primary current measuring range I_P (A)
SIOY2C50V2	50	± 150
SIOY2C75V2	75	± 225
SIOY2C100V2	100	± 300
SIOY2C150V2	150	± 450
SIOY2C200V2	200	± 600
SIOY2C300V2	300	± 900
SIOY2C400V2	400	± 900
SIOY2C500V2	500	± 900
SIOY2C600V2	600	± 900

General Description

For the electronic measurement of currents: DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit)


Parameters Table

PARAMETERS	SYMBOL	UNIT	VALUE	CONDITIONS
Electrical data				
Supply voltage($\pm 5\%$) ⁽¹⁾	V_C	V	± 15	
Current consumption	I_C	mA	± 15	
Output voltage	V_{out}	mV	$\pm 4V \pm 40$	@ $\pm I_{PN}$, $R_L = 10\text{ k}\Omega$, $T_A = 25^\circ\text{C}$
Overload capability(1ms)	I_{PC}	A_t	$50 * I_{PN}$	@ $\pm I_{PN}$, $R_L = 10\text{ k}\Omega$, $T_A = 25^\circ\text{C}$
Isolation resistance	R_{IS}	$M\Omega$	>1000	@ 500 VDC
Output internal resistance	R_{OUT}	Ω	100	approx
Load resistance ⁽²⁾	R_L	$K\Omega$	>10	
R. m. s voltage for AC isolation test	V_d	KV	3	@50Hz, 1 min
R. m. s rated voltage、 safe separation	V_b	V	500	
Accuracy - Dynamic performance data				
Linearity ⁽³⁾ ($0 \dots \pm I_{PN}$)	ϵ_L	% of I_{PN}	$< \pm 1$	
Accuracy	X	%	$< \pm 1$	@ I_{PN} , $T_A = 25^\circ\text{C}$ (without offset)
Electrical offset voltage	V_{OE}	mV	$< \pm 20$	@ $T_A = 25^\circ\text{C}$
Hysteresis offset voltage	V_{OH}	mV	$< \pm 20$	@ $I_P = 0$; after an excursion of $1 * I_{PN}$
Temperature coefficient of V_{OE}	TCV_{OE}	mV/K	$< \pm 2$	@SIOY2C50-75V2
			$< \pm 1$	@SIOY2C100-600V2
Temperature coefficient of V_{OUT}	TCV_{OUT}	%/K	$< \pm 0.1$	@% of reading
Response time	t_r	μS	< 3	@ 90% of I_{PN} step
d_i/d_t accurately followed	d_i/d_t	$A/\mu\text{S}$	> 50	
Frequency bandwidth ⁽⁴⁾	BW	kHz	DC~50	@ -3dB
General data				
Ambient operating temperature	T_A	$^\circ\text{C}$	-40 ~ +85	
Ambient storage temperature	T_S	$^\circ\text{C}$	-40 ~ +105	
Mass	m	g	approx 60	

Notes:

- Operating at $\pm 12V \leq V_C < \pm 15V$ will reduce the measuring range.
- If the customer uses $1K\Omega$ of the load resistor, the primary current has to be limited as the nominal. To measure the full defined measuring range, the load resistor should be at minimum $10\text{ K}\Omega$.
- Linearity data exclude the electrical offset.
- Please refer to derating curves in the technical file to avoid excessive core heating at high frequency.

Dimensions SIOY2CV2 (in mm. 1 mm = 0.0394 inch)

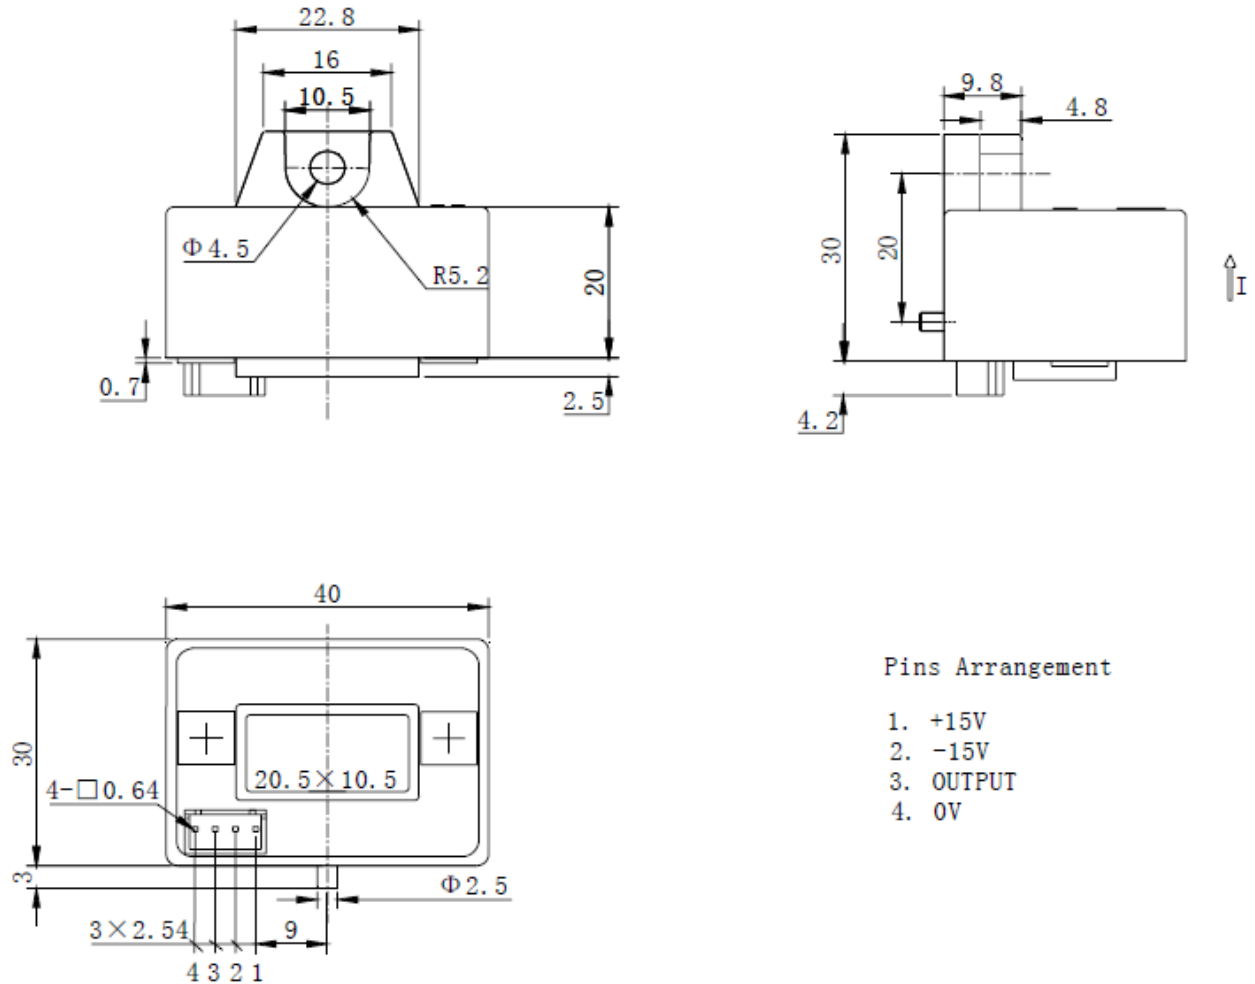

Pins Arrangement

1. +15V
2. -15V
3. OUTPUT
4. 0V

Instructions of use

- 1) When the test current passes through the sensors you can get the size of the output voltage.
(Warning: wrong connection may lead to sensors damage)
- 2) Based on user needs, the sensors output range can be appropriately regulated.
- 3) According to user needs, different rated input currents and output voltages of the sensors can be customized.

RESTRICTIONS ON PRODUCT USE

The information contained herein is subject to change without notice.

SEC ELECTRONICS INC. (for short SEC) exerts the greatest possible effort to ensure high quality and reliability. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing SEC products, to comply with the standards of safety in making a safe design for the entire system, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue. In developing your designs, please ensure that SEC products are used within specified operating ranges as set forth in the most recent SEC products specifications.

The SEC products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These SEC products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury (“Unintended Usage”). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of SEC products listed in this document shall be made at the customer’s own risk.