

DATA SHEET

E30/15/7
E cores and accessories


Supersedes data of February 2002

2004 Sep 01

CORE SETS

Effective core parameters

| SYMBOL | PARAMETER | VALUE | UNIT |
|---------------|-------------------|-------|------------------|
| $\Sigma(l/A)$ | core factor (C1) | 1.12 | mm ⁻¹ |
| V_e | effective volume | 4000 | mm ³ |
| l_e | effective length | 67.0 | mm |
| A_e | effective area | 60.0 | mm ² |
| A_{min} | minimum area | 49.0 | mm ² |
| m | mass of core half | ≈ 11 | g |

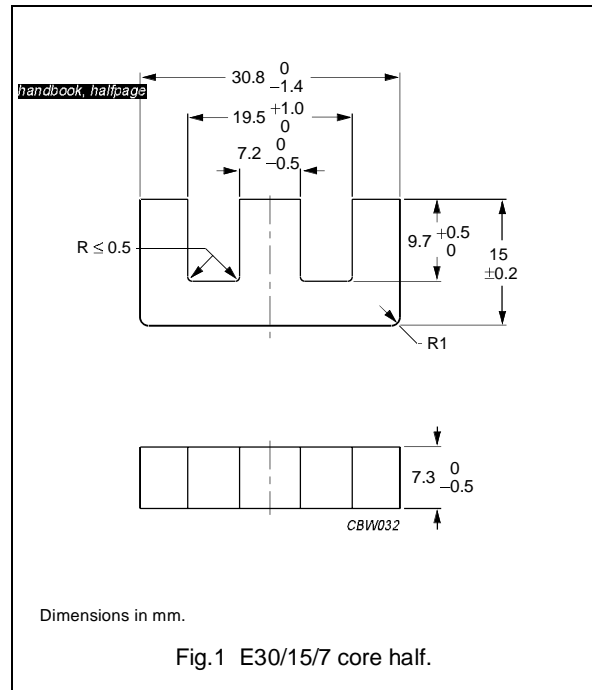


Core halves

A_L measured in combination with a non-gapped core half, clamping force for A_L measurements 20 ± 10 N, unless stated otherwise.

| GRADE | A_L (nH) | μ_e | AIR GAP (μ m) | TYPE NUMBER |
|------------------------------------------------------------------------|------------------------------|---------|--------------------|--------------------|
| 3C81 | 100 $\pm 5\%$ ⁽¹⁾ | ≈ 89 | ≈ 1100 | E30/15/7-3C81-E100 |
| | 160 $\pm 5\%$ | ≈ 142 | ≈ 580 | E30/15/7-3C81-A160 |
| | 250 $\pm 5\%$ | ≈ 222 | ≈ 330 | E30/15/7-3C81-A250 |
| | 315 $\pm 5\%$ | ≈ 280 | ≈ 240 | E30/15/7-3C81-A315 |
| | 400 $\pm 8\%$ | ≈ 355 | ≈ 180 | E30/15/7-3C81-A400 |
| | 630 $\pm 15\%$ | ≈ 560 | ≈ 100 | E30/15/7-3C81-A630 |
| | 2500 $\pm 25\%$ | ≈ 2220 | ≈ 0 | E30/15/7-3C81 |
| 3C90 | 100 $\pm 5\%$ ⁽¹⁾ | ≈ 89 | ≈ 1100 | E30/15/7-3C90-E100 |
| | 160 $\pm 5\%$ | ≈ 142 | ≈ 580 | E30/15/7-3C90-A160 |
| | 250 $\pm 5\%$ | ≈ 222 | ≈ 330 | E30/15/7-3C90-A250 |
| | 315 $\pm 5\%$ | ≈ 280 | ≈ 240 | E30/15/7-3C90-A315 |
| | 400 $\pm 8\%$ | ≈ 355 | ≈ 180 | E30/15/7-3C90-A400 |
| | 630 $\pm 15\%$ | ≈ 560 | ≈ 100 | E30/15/7-3C90-A630 |
| | 1900 $\pm 25\%$ | ≈ 1690 | ≈ 0 | E30/15/7-3C90 |
| 3C91 des | 2500 $\pm 25\%$ | ≈ 2220 | ≈ 0 | E30/15/7-3C91 |
| 3C92 des | 1400 $\pm 25\%$ | ≈ 1250 | ≈ 0 | E30/15/7-3C92 |
| 3C94 | 1900 $\pm 25\%$ | ≈ 1690 | ≈ 0 | E30/15/7-3C94 |
| 3C96 des | 1600 $\pm 25\%$ | ≈ 1420 | ≈ 0 | E30/15/7-3C96 |

E cores and accessories

E30/15/7

| GRADE | A_L (nH) | μ_e | AIR GAP (μm) | TYPE NUMBER |
|----------------------------------------------------------------------------------------|------------------------------|----------------|------------------------------|-------------------|
| 3F3 | 100 $\pm 5\%$ ⁽¹⁾ | ≈ 89 | ≈ 1100 | E30/15/7-3F3-E100 |
| | 160 $\pm 5\%$ | ≈ 142 | ≈ 580 | E30/15/7-3F3-A160 |
| | 250 $\pm 5\%$ | ≈ 222 | ≈ 330 | E30/15/7-3F3-A250 |
| | 315 $\pm 5\%$ | ≈ 280 | ≈ 240 | E30/15/7-3F3-A315 |
| | 400 $\pm 8\%$ | ≈ 355 | ≈ 180 | E30/15/7-3F3-A400 |
| | 630 $\pm 15\%$ | ≈ 560 | ≈ 100 | E30/15/7-3F3-A630 |
| | 1600 $\pm 25\%$ | ≈ 1420 | ≈ 0 | E30/15/7-3F3 |
| 3F35  | 1250 $\pm 25\%$ | ≈ 1110 | ≈ 0 | E30/15/7-3F35 |

Note

1. Measured in combination with an equal gapped core half, clamping force for A_L measurements, 20 \pm 10 N.

Core halves of high permeability gradesClamping force for A_L measurements 20 \pm 10 N.

| GRADE | A_L (nH) | μ_e | AIR GAP (μm) | TYPE NUMBER |
|-------|-----------------|----------------|------------------------------|---------------|
| 3C11 | 3300 $\pm 25\%$ | ≈ 2930 | ≈ 0 | E30/15/7-3C11 |
| 3E27 | 4100 $\pm 25\%$ | ≈ 3640 | ≈ 0 | E30/15/7-3E27 |

E cores and accessories

E30/15/7

Properties of core sets under power conditions

| GRADE | B (mT) at | CORE LOSS (W) at | | | |
|-------|-------------------------------------------|-------------------------------------------|--------------------------------------------|--------------------------------------------|-------------------------------------------|
| | H = 250 A/m; f = 25 kHz; T = 100 °C | f = 25 kHz; B̂ = 200 mT; T = 100 °C | f = 100 kHz; B̂ = 100 mT; T = 100 °C | f = 100 kHz; B̂ = 200 mT; T = 100 °C | f = 400 kHz; B̂ = 50 mT; T = 100 °C |
| 3C81 | ≥320 | ≤ 0.82 | – | – | – |
| 3C90 | ≥330 | ≤ 0.45 | ≤ 0.48 | – | – |
| 3C91 | ≥320 | – | ≤ 0.27 ⁽¹⁾ | ≤ 1.6 ⁽¹⁾ | – |
| 3C92 | ≥370 | – | ≤ 0.36 | ≤ 2.0 | – |
| 3C94 | ≥330 | – | ≤ 0.36 | ≤ 2.0 | – |
| 3C96 | ≥340 | – | ≤ 0.27 | ≤ 1.6 | – |
| 3F3 | ≥320 | – | ≤ 0.47 | – | ≤ 0.80 |
| 3F35 | ≥300 | – | – | – | – |

Properties of core sets under power conditions (continued)

| GRADE | B (mT) at | CORE LOSS (W) at | | | |
|-------|-------------------------------------------|-------------------------------------------|--------------------------------------------|-----------------------------------------|-----------------------------------------|
| | H = 250 A/m; f = 25 kHz; T = 100 °C | f = 500 kHz; B̂ = 50 mT; T = 100 °C | f = 500 kHz; B̂ = 100 mT; T = 100 °C | f = 1 MHz; B̂ = 30 mT; T = 100 °C | f = 3 MHz; B̂ = 10 mT; T = 100 °C |
| 3C81 | ≥320 | – | – | – | – |
| 3C90 | ≥330 | – | – | – | – |
| 3C91 | ≥320 | – | – | – | – |
| 3C92 | ≥370 | – | – | – | – |
| 3C94 | ≥330 | – | – | – | – |
| 3C96 | ≥340 | ≤ 1.5 | – | – | – |
| 3F3 | ≥320 | – | – | – | – |
| 3F35 | ≥300 | ≤ 0.54 | ≤ 4.2 | – | – |


Note

1. Measured at 60 °C.

COIL FORMERS

GENERAL DATA FOR E30/15/7 COIL FORMER WITHOUT PINS

| PARAMETER | SPECIFICATION |
|-------------------------------|--------------------------------------------------------------------------------------------------------------|
| Coil former material | polyamide (PA6.6), glass reinforced, flame retardant in accordance with "UL 94-HB"; UL file number E41613(M) |
| Maximum operating temperature | 120 °C |

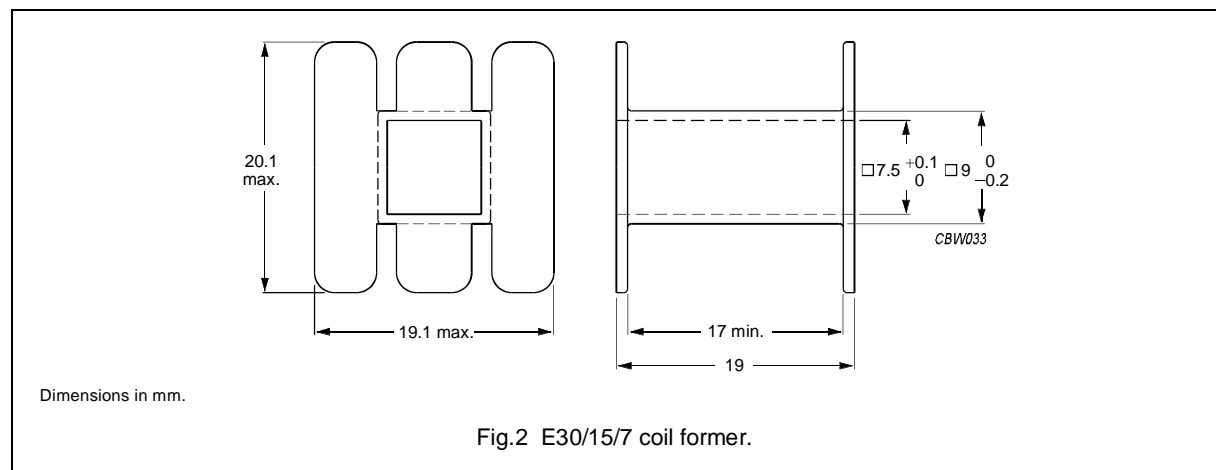


WINDING DATA FOR E30/15/7 COIL FORMER WITHOUT PINS (E)

| NUMBER OF SECTIONS | WINDING AREA (mm ²) | MINIMUM WINDING WIDTH (mm) | AVERAGE LENGTH OF TURN (mm) | TYPE NUMBER |
|--------------------|---------------------------------|----------------------------|-----------------------------|----------------|
| 1 | 80 | 17.0 | 56 | CP-E30/15/7-1S |

GENERAL DATA FOR 10-PINS E30/15/7 COIL FORMER

| PARAMETER | SPECIFICATION |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Coil former material | phenolformaldehyde (PF), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E167521(M) |
| Pin material | copper-tin alloy (CuSn), tin-lead alloy (SnPb) plated, transition to lead-free (Sn) ongoing. |
| Maximum operating temperature | 180 °C, "IEC 60085", class H |
| Resistance to soldering heat | "IEC 60068-2-20", Part 2, Test Tb, method 1B: 350 °C, 3.5 s |
| Solderability | "IEC 60068-2-20", Part 2, Test Ta, method 1: 235 °C, 2 s |

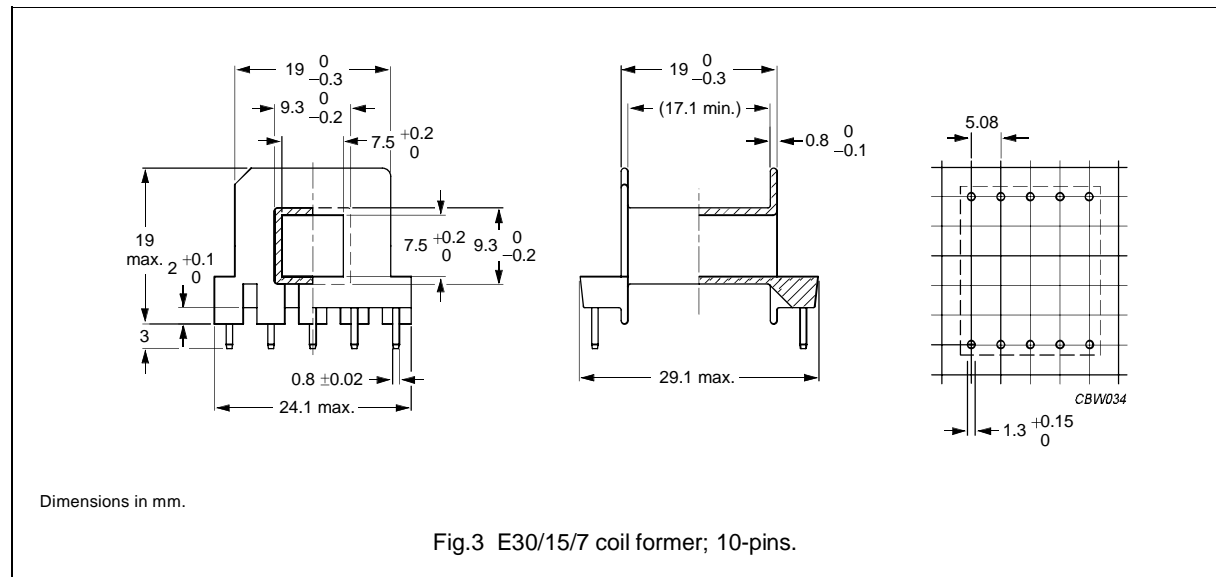



WINDING DATA FOR 10-PINS E30/15/7 COIL FORMER (E)

| NUMBER OF NECTIONS | WINDING AREA (mm ²) | MINIMUM WINDING WIDTH (mm) | AVERAGE LENGTH OF TURN (mm) | TYPE NUMBER |
|--------------------|---------------------------------|----------------------------|-----------------------------|------------------|
| 1 | 80 | 17.1 | 56 | CSH-E30/7-1S-10P |

MOUNTING PARTS

General data and ordering information

| ITEM | REMARKS | FIGURE | TYPE NUMBER |
|--------|------------------------|--------|--------------|
| Clasp | CuZn alloy, Ni plated | 4 | CLA-E30/15/7 |
| Spring | stainless steel (CrNi) | 5 | SPR-E30/15/7 |

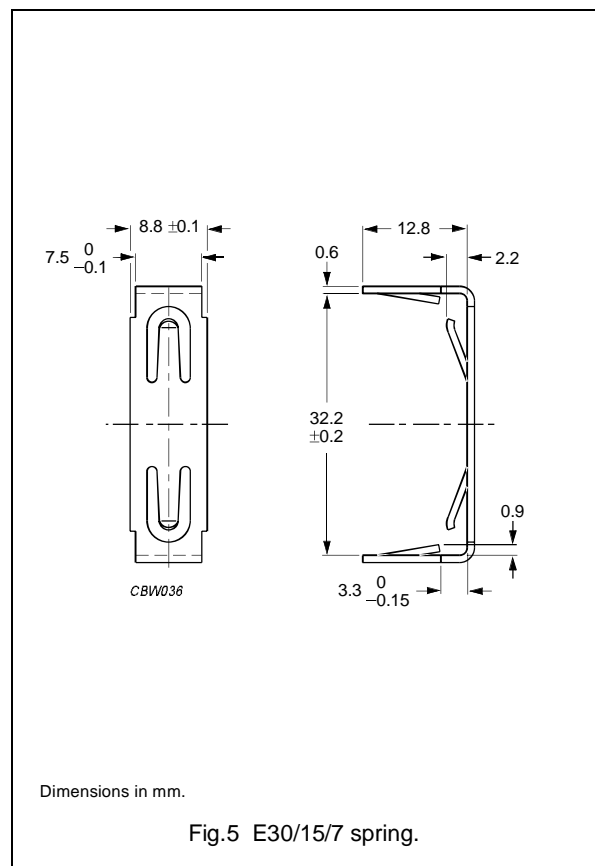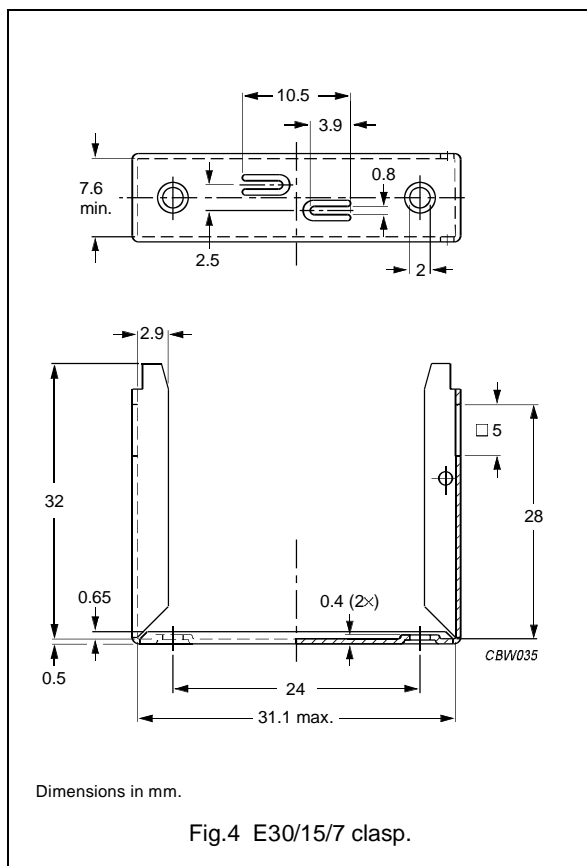




DATA SHEET STATUS DEFINITIONS

| DATA SHEET STATUS | PRODUCT STATUS | DEFINITIONS |
|---------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Preliminary specification | Development | This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |
| Product specification | Production | This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

| STATUS | INDICATION | DEFINITION |
|------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prototype |  | These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change. |
| Design-in |  | These products are recommended for new designs. |
| Preferred | | These products are recommended for use in current designs and are available via our sales channels. |
| Support |  | These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability. |