



- Low profile surface mount package
- 235°C peak infrared reflow temperature rating
- Units matched to following transceivers

<b>AMD</b>	AM186CC15DN	8236	<b>DAVICOM</b>	DM9008	8232, 8234	
	AM79C98	8231, 8232, 8234, 8236		<b>FUJITSU</b>	MB86967	8232, 8234
	AM79C100	8231, 8232, 8234, 8236	<b>LSI LOGIC</b>		L64381	8232, 8234, 8237
	AM79C940	8231, 8232, 8234, 8236			<b>LUCENT</b>	T7231
	AM79C960	8231, 8232, 8234, 8236		T7241A		8232, 8234
	AM79C961	8231, 8232, 8234, 8236		<b>MOTOROLA</b>		MC68160
	AM79C965	8231, 8232, 8234, 8236	<b>NATIONAL</b>		DP83902	8232, 8234, 8235
	AM79C970	8231, 8232, 8234, 8236			DP83902A	8232, 8234, 8235
	AM79C971	8231, 8232, 8234, 8236			DP83905	8232, 8234, 8235
	AM79C981	8231, 8232, 8234, 8236	DP83905		8232, 8234, 8235	
	AM79C982	8231, 8232, 8234, 8236	DP83934	8232, 8234, 8235		
AM79C983	8231, 8232, 8234, 8236					
<b>SYMBIOS LOGIC</b>	NCR92C350	8232, 8234, 8236				


**MECHANICAL (All dimensions in inches)**


NOTE: See page 2 for electrical characteristics, schematics and resistor values.

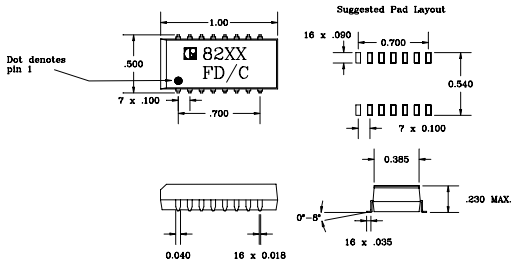