




Micro Commercial Components  
 21201 Itasca Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

**2N4403**

## Features

- Through Hole Package
- Capable of 600mWatts of Power Dissipation

Pin Configuration  
 Bottom View



## PNP General Purpose Amplifier

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
<b>OFF CHARACTERISTICS</b>				
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage* ( $I_C=1.0mA_{dc}$ , $I_B=0$ )	40		Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ( $I_C=10\mu A_{dc}$ , $I_E=0$ )	40		Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ( $I_E=10\mu A_{dc}$ , $I_C=0$ )	5.0		Vdc
$I_{BL}$	Base Cutoff Current ( $V_{CE}=30V_{dc}$ , $V_{BE}=3.0V_{dc}$ )		0.1	$\mu A_{dc}$
$I_{CEX}$	Collector Cutoff Current ( $V_{CE}=30V_{dc}$ , $V_{BE}=3.0V_{dc}$ )		0.1	$\mu A_{dc}$

### ON CHARACTERISTICS

$h_{FE}$	DC Current Gain* ( $I_C=0.1mA_{dc}$ , $V_{CE}=1.0V_{dc}$ ) ( $I_C=1.0mA_{dc}$ , $V_{CE}=1.0V_{dc}$ ) ( $I_C=10mA_{dc}$ , $V_{CE}=1.0V_{dc}$ ) ( $I_C=150mA_{dc}$ , $V_{CE}=2.0V_{dc}$ ) ( $I_C=500mA_{dc}$ , $V_{CE}=2.0V_{dc}$ )	30 60 100 100 20	300	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ( $I_C=150mA_{dc}$ , $I_B=15mA_{dc}$ ) ( $I_C=500mA_{dc}$ , $I_B=50mA_{dc}$ )		0.4 0.75	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ( $I_C=150mA_{dc}$ , $I_B=15mA_{dc}$ ) ( $I_C=500mA_{dc}$ , $I_B=50mA_{dc}$ )	0.75	0.95 1.30	Vdc

### SMALL-SIGNAL CHARACTERISTICS


$f_T$	Current Gain-Bandwidth Product ( $I_C=20mA_{dc}$ , $V_{CE}=10V_{dc}$ , $f=100MHz$ )	200		MHz
$C_{cb}$	Output Capacitance ( $V_{CB}=10V_{dc}$ , $I_E=0$ , $f=140kHz$ )		8.5	pF
$C_{eb}$	Input Capacitance ( $V_{EB}=0.5V_{dc}$ , $I_C=0$ , $f=140kHz$ )		30.0	pF

### SWITCHING CHARACTERISTICS







$t_d$	Delay Time	( $V_{CC}=3.0V_{dc}$ , $V_{BE}=2.0V_{dc}$ )	15	ns
$t_r$	Rise Time	$I_C=150mA_{dc}$ , $I_{B1}=15mA_{dc}$	20	ns
$t_s$	Storage Time	( $V_{CC}=3.0V_{dc}$ , $I_C=150mA_{dc}$ )	225	ns
$t_f$	Fall Time	$I_{B1}=I_{B2}=15mA_{dc}$	30	ns

\*Pulse Width  $\leq 300\mu s$ , Duty Cycle  $\leq 2.0\%$

### TO-92

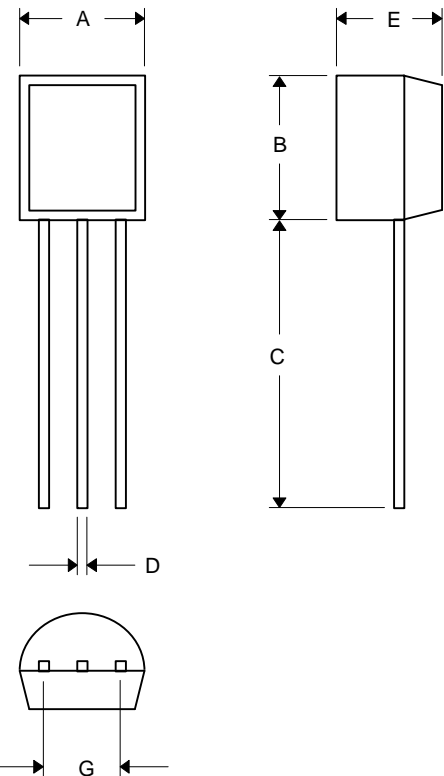

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.175	.185	4.45	4.70	
B	.175	.185	4.46	4.70	
C	.500	---	12.7	---	
D	.016	.020	0.41	0.63	
E	.135	.145	3.43	3.68	
G	.095	.105	2.42	2.67	

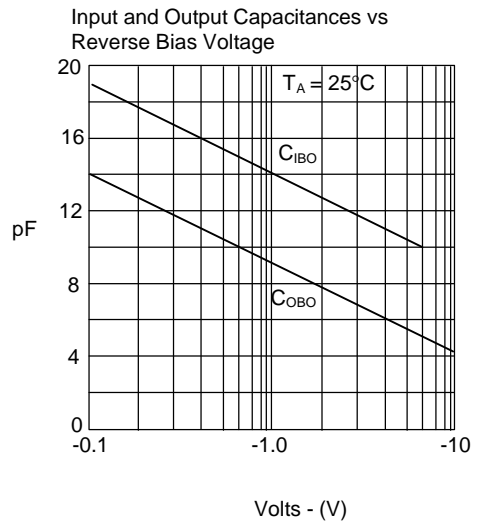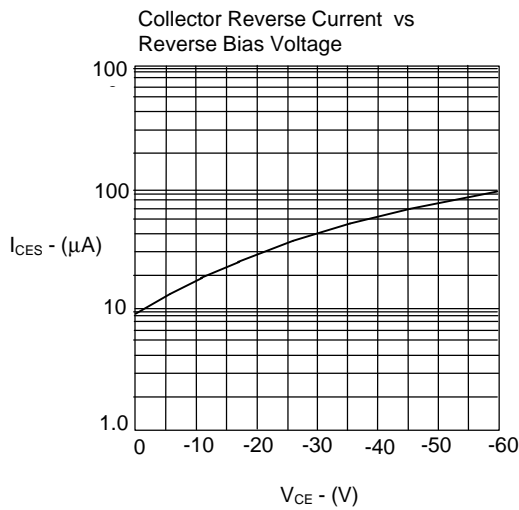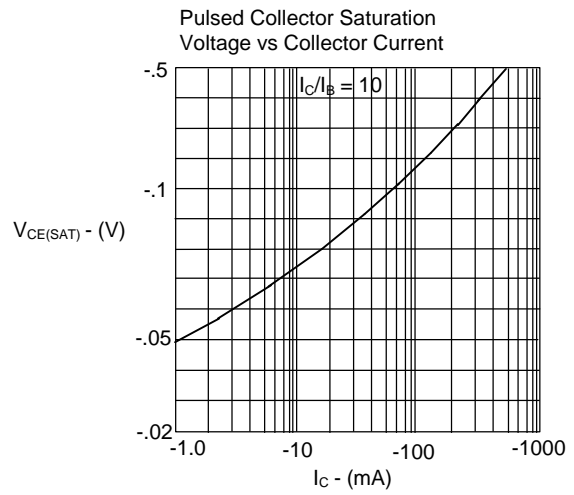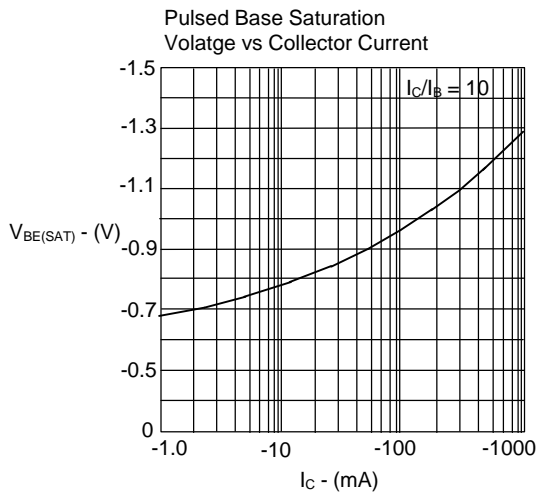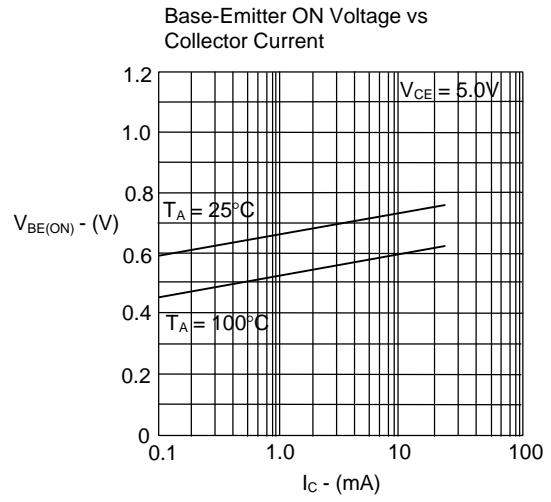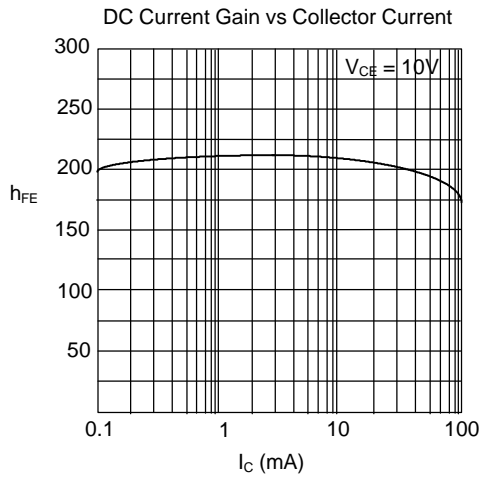

# 2N4403

