

FEATURES

- Drop-in replacement for IBM AT computer clock/calendar
- Pin compatible with the MC146818B and DS1287A
- Totally nonvolatile with over 10 years of operation in the absence of power
- Self-contained subsystem includes lithium, quartz, and support circuitry
- Counts seconds, minutes, hours, days, day of the week, date, month, and year with leap-year compensation valid up to 2100
- Binary or BCD representation of time, calendar, and alarm
- 12- or 24-hour clock with AM and PM in 12-hour mode
- Daylight Savings Time option
- Selectable between Motorola and Intel bus timing
- Multiplex bus for pin efficiency
- Interfaced with software as 128 RAM locations
 - 15 bytes of clock and control registers
 - 113 bytes of general purpose RAM
- Programmable square-wave output signal
- Bus-compatible interrupt signals (IRQ)
- Three interrupts are separately software-maskable and testable
 - Time-of-day alarm once/second to once/day
 - Periodic rates from 122 μ s to 500ms
 - En-of-clock update cycle
- Century register

PIN ASSIGNMENT

| | | | |
|-----|----|----|---------------------------|
| MOT | 1 | 24 | V _{CC} |
| NC | 2 | 23 | SQW |
| NC | 3 | 22 | NC |
| AD0 | 4 | 21 | $\overline{\text{RCLR}}$ |
| AD1 | 5 | 20 | NC |
| AD2 | 6 | 19 | $\overline{\text{IRQ}}$ |
| AD3 | 7 | 18 | $\overline{\text{RESET}}$ |
| AD4 | 8 | 17 | DS |
| AD5 | 9 | 16 | NC |
| AD6 | 10 | 15 | $\overline{\text{R/W}}$ |
| AD7 | 11 | 14 | AS |
| GND | 12 | 13 | $\overline{\text{CS}}$ |

DS12C887A
24-Pin Encapsulated Package

PIN DESCRIPTION

| | |
|---------------------------|--------------------------------|
| AD0–AD7 | - Multiplexed Address/Data Bus |
| NC | - No Connect |
| MOT | - Bus Type Selection |
| $\overline{\text{CS}}$ | - RTC Chip Select Input |
| AS | - Address Strobe |
| $\overline{\text{R/W}}$ | - Read/Write Input |
| DS | - Data Strobe |
| $\overline{\text{RESET}}$ | - Reset Input |
| $\overline{\text{IRQ}}$ | - Interrupt Request Output |
| SQW | - Square-Wave Output |
| V _{CC} | - +5V Main Supply |
| $\overline{\text{RCLR}}$ | - RAM Clear |
| GND | - Ground |


DESCRIPTION

The DS12C887A real-time clock plus RAM is designed to be a direct upgrade replacement for the DS12887A in existing IBM-compatible personal computers to add hardware year-2000 compliance. A century byte was added to memory location 50, 32h, as called out by the PC AT specification. The DS12C887A is identical in form, fit, and function to the DS1287A, and provides additional 64 bytes of general-purpose RAM. Access to this additional RAM space is determined by the logic level presented on AD6 during the address portion of an access cycle. The $\overline{\text{RCLR}}$ pin is used to clear (set to logic 1) all 113 bytes of general purpose RAM but does not affect the RAM associated with the real time clock. In order

to clear the RAM, $\overline{\text{RCLR}}$ must be forced to an input logic 0 (-0.3V to +0.8V) during battery-backup mode when V_{CC} is not applied. The $\overline{\text{RCLR}}$ function is designed to be used via human interface (shorting to ground manually or by switch) and not to be driven with external buffers.

For a complete description of operating conditions, electrical characteristics, bus timing and pin descriptions other than $\overline{\text{RCLR}}$, see the DS12C887 data sheet.

DS12C887 REAL-TIME CLOCK PLUS RAM

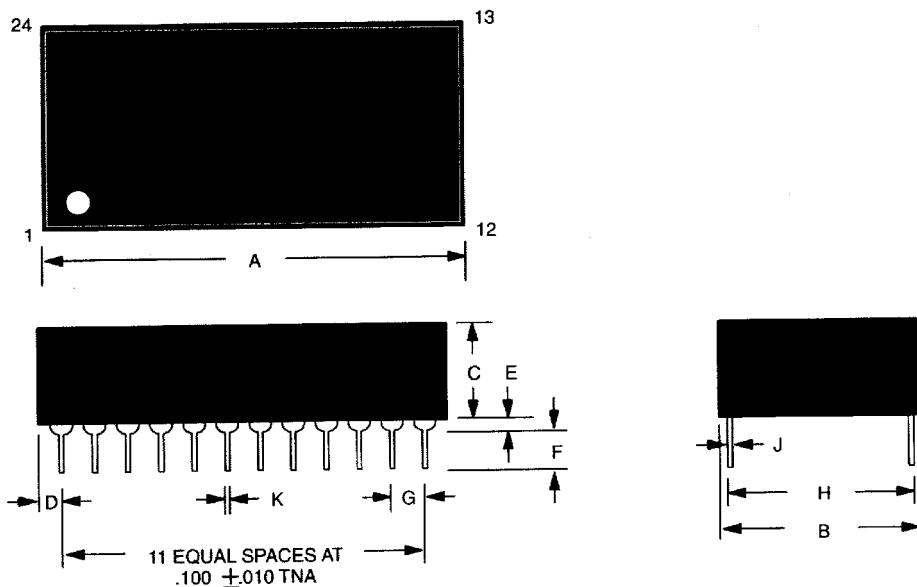

| PKG | 24-PIN | |
|-------|--------|-------|
| DIM | MIN | MAX |
| A IN. | 1.320 | 1.335 |
| MM | 33.53 | 33.91 |
| B IN. | 0.675 | 0.700 |
| MM | 17.15 | 17.78 |
| C IN. | 0.345 | 0.370 |
| MM | 8.76 | 9.40 |
| D IN. | 0.100 | 0.130 |
| MM | 2.54 | 3.30 |
| E IN. | 0.015 | 0.030 |
| MM | 0.38 | 0.76 |
| F IN. | 0.110 | 0.140 |
| MM | 2.79 | 3.56 |
| G IN. | 0.090 | 0.110 |
| MM | 2.29 | 2.79 |
| H IN. | 0.590 | 0.630 |
| MM | 14.99 | 16.00 |
| J IN. | 0.008 | 0.012 |
| MM | 0.20 | 0.30 |
| K IN. | 0.015 | 0.021 |
| MM | 0.38 | 0.53 |

Note: Pins 2, 3, 16, 20, and 22 are missing by design. This device cannot be stored or shipped in conductive material that will give a continuity path between the RAM clear pin and ground.