

$I_{F(AV)} = 5.5\text{Amp}$   
 $V_R = 100\text{V}$

**Major Ratings and Characteristics**

| Characteristics                         | Values     | Units            |
|---|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform        | 5.5        | A                |
| $V_{RRM}$                               | 100        | V                |
| $I_{FSM}$ @tp = 5 $\mu$ s sine          | 480        | A                |
| $V_F$ @5 Apk, $T_J = 125^\circ\text{C}$ | 0.63       | V                |
| $T_J$ range                             | -40 to 150 | $^\circ\text{C}$ |

**Description/ Features**

The 50WQ10G surface mount Schottky rectifier has been designed for applications requiring low forward drop and small foot prints on PC board. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.


- Popular D-PAK outline
- Small foot print, surface mountable
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

**Case Styles**

50WQ10G



D-PAK



# 50WQ10G

Preliminary Data Sheet PD-20683 09/04



## Voltage Ratings

| Part number  | 50WQ10G |
|--|---------|
| V <sub>R</sub> Max. DC Reverse Voltage (V)             | 100     |
| V <sub>RWM</sub> Max. Working Peak Reverse Voltage (V) |         |

## Absolute Maximum Ratings

| Parameters   | 50WQ... | Units | Conditions  |
|--|---------|-------|---|
| I <sub>F(AV)</sub> Max. Average Forward Current<br>* See Fig. 5  | 5.5     | A     | 50% duty cycle @ T <sub>C</sub> = 135°C, rectangular wave form  |
| I <sub>FSM</sub> Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7<br><br>Following any rated load condition and with rated V <sub>RWM</sub> applied | 300     | A     | 3µs Sine or 3µs Rect. pulse   |
|  | 100     |       | 6ms Sine or 6ms Rect. pulse   |
|  | 480     |       | 3µs Sine or 3µs Rect. pulse   |
|  | 165     |       | 6ms Sine or 6ms Rect. pulse   |
| E <sub>AS</sub> Non-Repetitive Avalanche Energy  | 6.0     | mJ    | T <sub>J</sub> = 25 °C, I <sub>AS</sub> = 0.5 Amps, L = 40 mH   |
| I <sub>AR</sub> Repetitive Avalanche Current   | 0.5     | A     | Current decaying linearly to zero in 1 µsec<br>Frequency limited by T <sub>J</sub> max. V <sub>A</sub> = 1.5 x V <sub>R</sub> typical |

## Electrical Specifications

| Parameters   | 50WQ... | Units | Conditions   |
|--|---------|-------|--|
| V <sub>FM</sub> Max. Forward Voltage Drop<br>* See Fig. 1 (1)    | 0.77    | V     | @ 5A   |
|  | 0.91    | V     | @ 10A  |
|  | 0.63    | V     | @ 5A   |
|  | 0.74    | V     | @ 10A  |
| I <sub>RM</sub> Max. Reverse Leakage Current<br>* See Fig. 2 (1) | 0.22    | mA    | T <sub>J</sub> = 25 °C   |
|  | 4       | mA    | T <sub>J</sub> = 125 °C  |
| V <sub>F(TO)</sub> Threshold Voltage                             | 0.47    | V     | T <sub>J</sub> = T <sub>J</sub> max.                                       |
| r <sub>t</sub> Forward Slope Resistance                          | 21.46   | mΩ    |  |
| C <sub>T</sub> Typical Junction Capacitance                      | 183     | pF    | V <sub>R</sub> = 5V <sub>DC</sub> (test signal range 100Khz to 1Mhz) 25 °C |
| L <sub>S</sub> Typical Series Inductance                         | 5.0     | nH    | Measured lead to lead 5mm from package body                                |

(1) Pulse Width < 300µs, Duty Cycle < 2%

## Thermal-Mechanical Specifications

| Parameters  | 50WQ...    | Units  | Conditions                |
|---|------------|--------|---------------------------|
| T <sub>J</sub> Max. Junction Temperature Range (*)            | -40 to 150 | °C     |                           |
| T <sub>stg</sub> Max. Storage Temperature Range               | -40 to 150 | °C     |                           |
| R <sub>thJC</sub> Max. Thermal Resistance<br>Junction to Case | 3.0        | °C/W   | DC operation * See Fig. 4 |
| wt Approximate Weight   | 0.3(0.01)  | g(oz.) |                           |
| Case Style  | D-Pak      |        | Similar to TO-252AA       |
| Device Marking  | 50WQ10G    |        |                           |

(\*)  $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

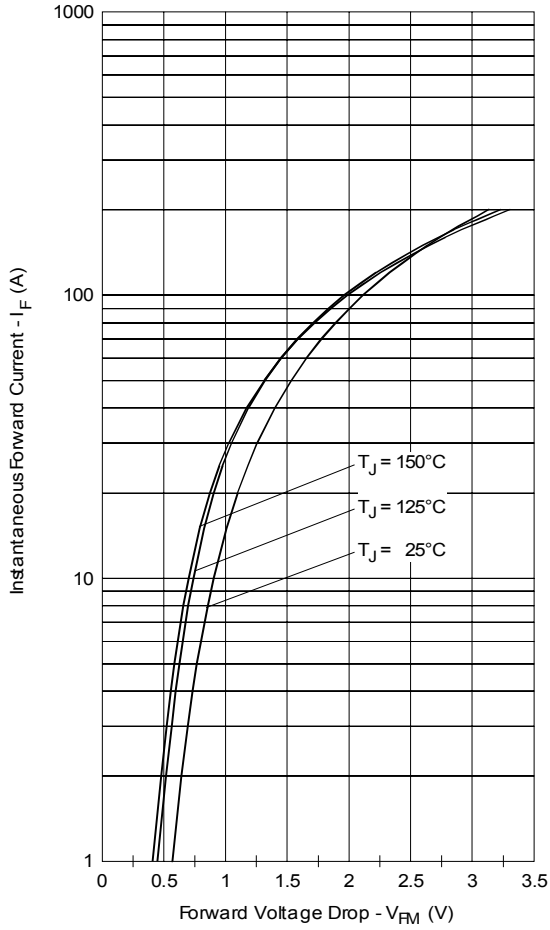


Fig. 1 - Maximum Forward Voltage Drop Characteristics

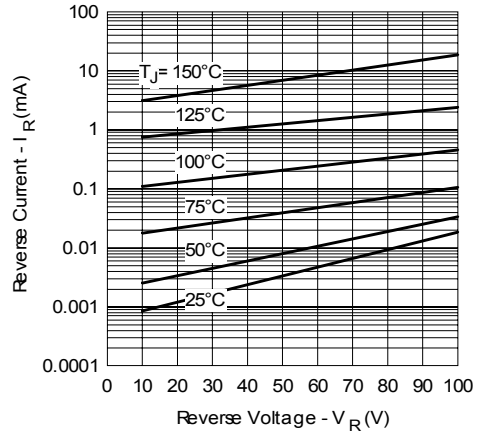


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

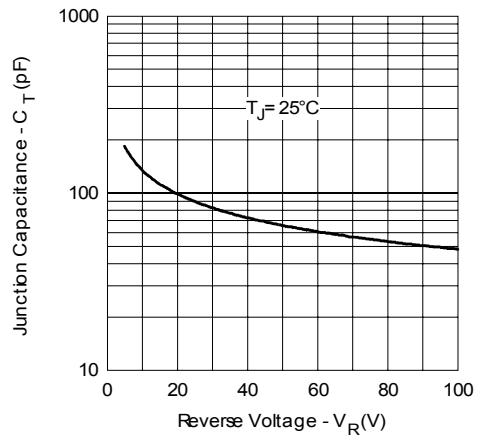


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

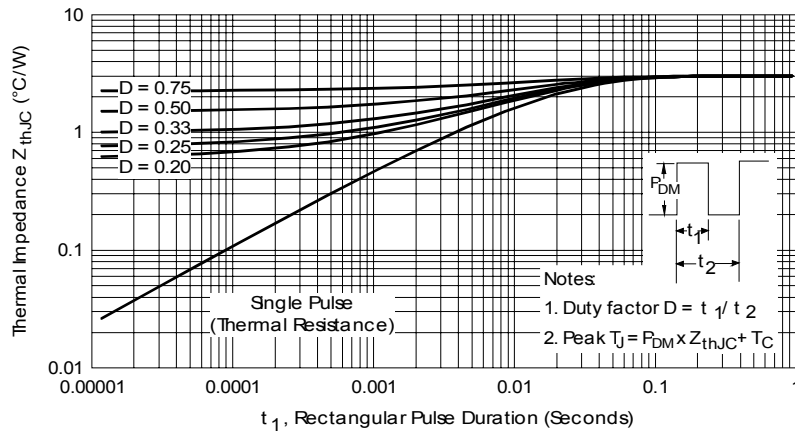


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

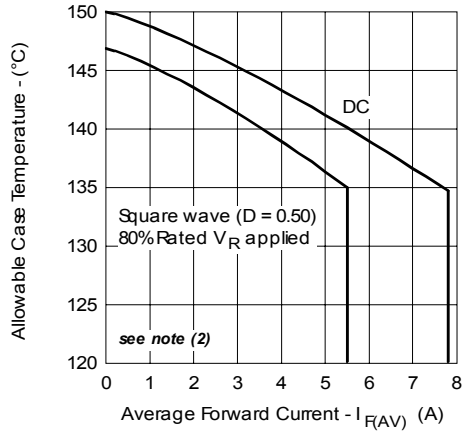


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

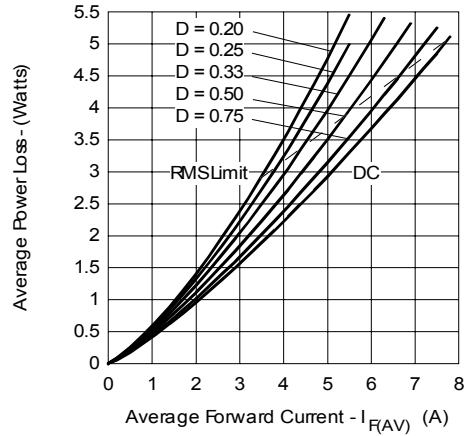


Fig. 6 - Forward Power Loss Characteristics

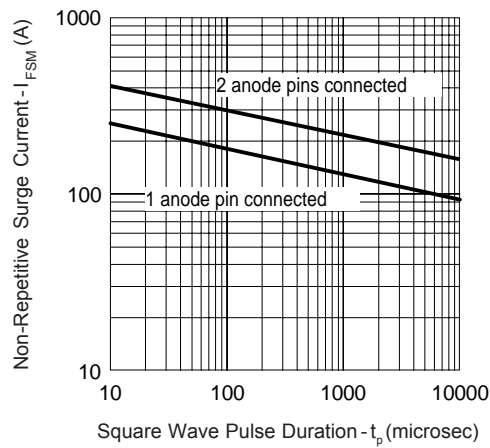



Fig. 7 - Maximum Non-Repetitive Surge Current

(2) Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;


$Pd$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$Pd_{REV}$  = Inverse Power Loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = 80\%$  rated  $V_R$


Outline Table

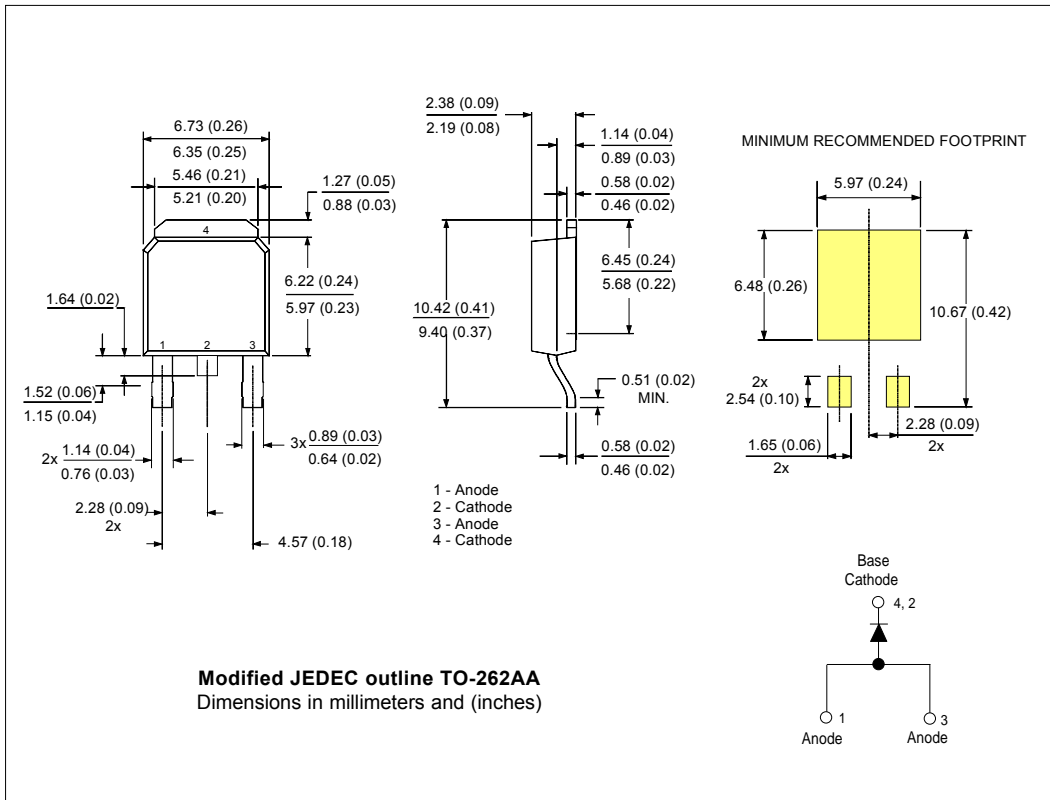

Marking Information

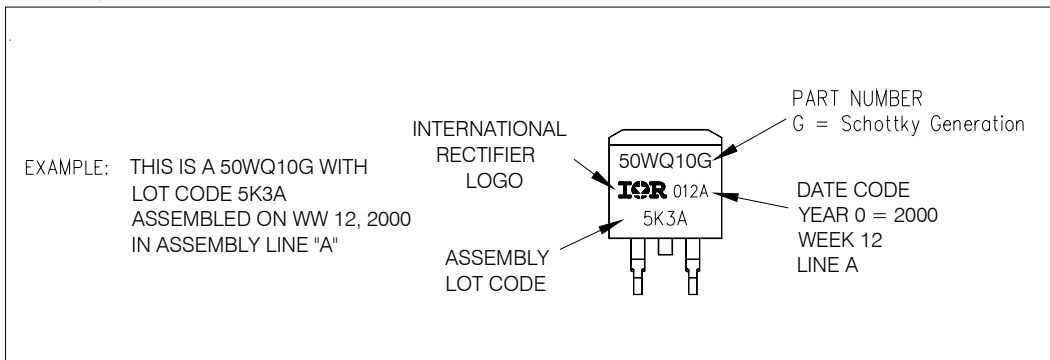

Tape & Reel Information

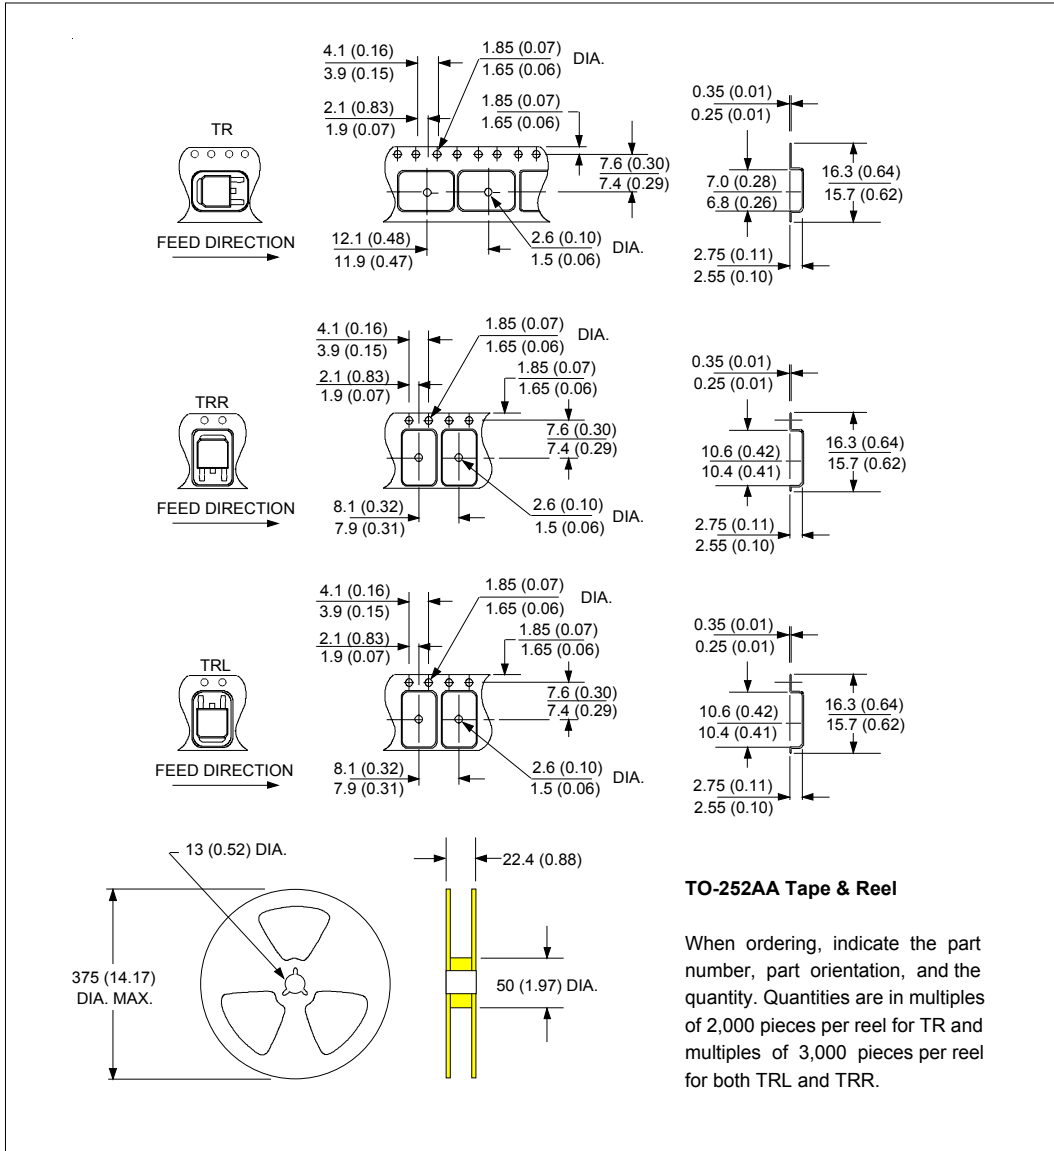

Ordering Information Table

| Device Code |   |    |    |   |     |   |     |   |   |   |   |   |   |   |   |
|-------------|---|----|----|---|-----|---|-----|---|---|---|---|---|---|---|---|
|             | <table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">50</td> <td style="padding: 5px;">W</td> <td style="padding: 5px;">Q</td> <td style="padding: 5px;">10</td> <td style="padding: 5px;">G</td> <td style="padding: 5px;">TRL</td> <td style="padding: 5px;">-</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> <td style="text-align: center;">⑦</td> </tr> </table> | 50 | W  | Q | 10  | G | TRL | - | ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ |
| 50          | W   | Q  | 10 | G | TRL | - |     |   |   |   |   |   |   |   |   |
| ①           | ②   | ③  | ④  | ⑤ | ⑥   | ⑦ |     |   |   |   |   |   |   |   |   |
| <b>1</b>    | - Current Rating (5.5A)   |    |    |   |     |   |     |   |   |   |   |   |   |   |   |
| <b>2</b>    | - Package<br>W = D-PAK  |    |    |   |     |   |     |   |   |   |   |   |   |   |   |
|             | - Q = Schottky Q Series   |    |    |   |     |   |     |   |   |   |   |   |   |   |   |
| <b>3</b>    | - Voltage Rating: Code x 10 = $V_{RRM}$ (10 = 100V)   |    |    |   |     |   |     |   |   |   |   |   |   |   |   |
| <b>4</b>    | - Schottky Generation   |    |    |   |     |   |     |   |   |   |   |   |   |   |   |
| <b>5</b>    | - • None = Tube (75 pieces)   |    |    |   |     |   |     |   |   |   |   |   |   |   |   |
| <b>6</b>    | - • TR = Tape & Reel<br>• TRL = Tape & Reel (Left Oriented)<br>• TRR = Tape & Reel (Right Oriented)   |    |    |   |     |   |     |   |   |   |   |   |   |   |   |
| <b>7</b>    | - • none = Standard Production<br>• PbF = Lead-Free   |    |    |   |     |   |     |   |   |   |   |   |   |   |   |

Data and specifications subject to change without notice.  
 This product has been designed for Q101.  
 Qualification Standards can be found on IR's Web site.