

13F-2Z-B

RELAY SOCKET




CHARACTERISTICS

Ambient temperature :	-40 °C to 70°C
Rated voltage :	300VAC
Rated current :	15A (per pole)
Insulation voltage (Min.) :	5000VAC
Protection degree DIN40050 :	IP20
Socket material :	PBT V0 (UL)
Contacts spring material :	QSn6.5-0.1
Steel retainer :	available
White plastic tag :	non-available
Modules :	non-available
Terminal torque:	1.0Nm
Wire strip length:	7mm
Applicable relay type:	HF13F (JQX-13F) (2 poles)


DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit: mm


Outline Dimensions

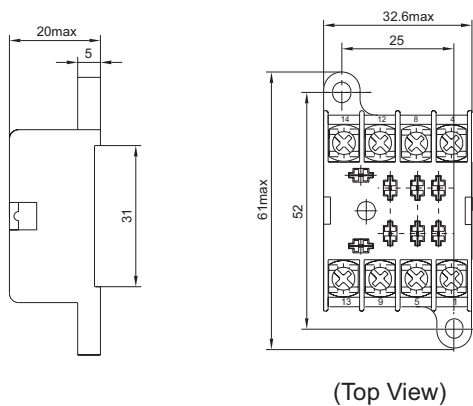


PCB Layout



Wiring Diagram



Retainer Dimensions

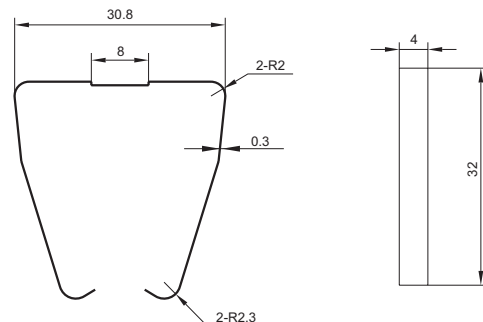

HONGFA RELAY
ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00