

# 13F-2Z-C2

# RELAY SOCKET




## CHARACTERISTICS

Ambient temperature :	-40 °C to 70 °C
Rated voltage:	300VAC
Rated current :	15A (per pole)
Insulation voltage (Min.) :	5000VAC
Protection degree DIN40050 :	IP20
Socket material :	PA66+GF V0 (UL)
Contacts spring material :	QSn6.5-0.1
Steel retainer :	available
White plastic tag :	non-available
Modules :	non-available
Terminal Torque :	1.0 Nm
Wire strip length :	7mm
Applicable relay type:	HF13F (JQX-13F) (2 poles)

## DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit: mm


### Outline Dimensions

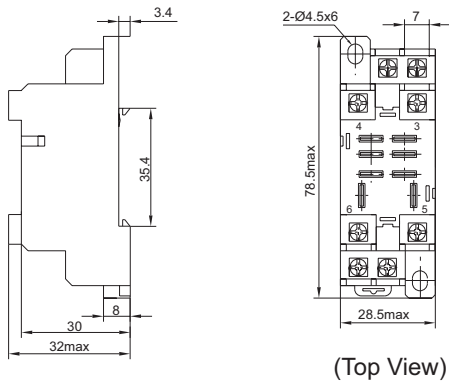


### PCB Layout



### Wiring Diagram



### Retainer Dimensions

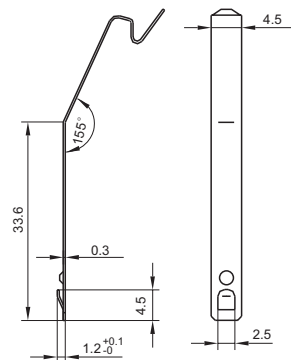

HONGFA RELAY  
ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00