

LOW CAPACITANCE TVS ARRAY

APPLICATIONS

- ✓ Computer Notebooks
- ✓ Communication Systems & Cellular Phones
- ✓ Printers
- ✓ Personal Digital Assitant(PDA)
- ✓ Video Equipment

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns

FEATURES


- ✓ 25 Watts Peak Pulse Power per Line ($t_p=8/20\mu s$)
- ✓ Monolithic Structure
- ✓ Available in 5 Volts
- ✓ Low Clamping Voltage
- ✓ ESD Protection > 40 kilovolts
- ✓ Low Leakage Current
- ✓ Low Capacitance: 9pF
- ✓ Protects Three (3) Bidirectional Lines and Four (4) Unidirectional Lines
- ✓ RoHS Compliant

MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SOT-553 Package
- ✓ Weight 3 milligrams (Approximate)
- ✓ Available in Lead-Free Nickel-Paladium-Gold Plating
- ✓ Solder Reflow Temperature:
Nickel-Paladium-Gold (Ni/Pd/Au) Sn/Ag/Cu: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481
- ✓ Marking: Marking Code & Pin One Defined By Dot on Top of Package

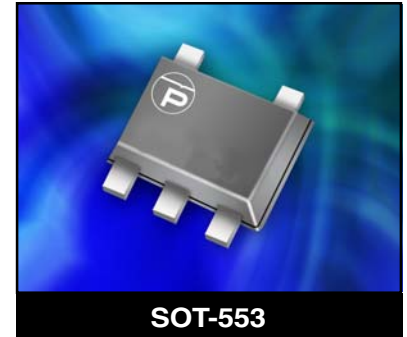

PIN CONFIGURATION



MSMF05LC

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	25	Watts
Operating Temperature	T_L	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C
Maximum Forward Voltage @ 10mA	V_F	1.0	V

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM LEAKAGE CURRENT	MAXIMUM CAPACITANCE (See Note 1)
		V_{WM} VOLTS	@ 1mA $V_{(BR)}$ VOLTS	@ 8/20 μs $V_C @ I_{PP}$	@ V_{WM} I_b μA	0V @ 1 MHz C pF
MSMF05LC	5L	5.0	6.0	12.0V @ 2.0A	1	9

Note 1: Pins 1, 3, 4, 5, or 6 to pin 2.

FIGURE 1
PEAK PULSE POWER VS PULSE TIME




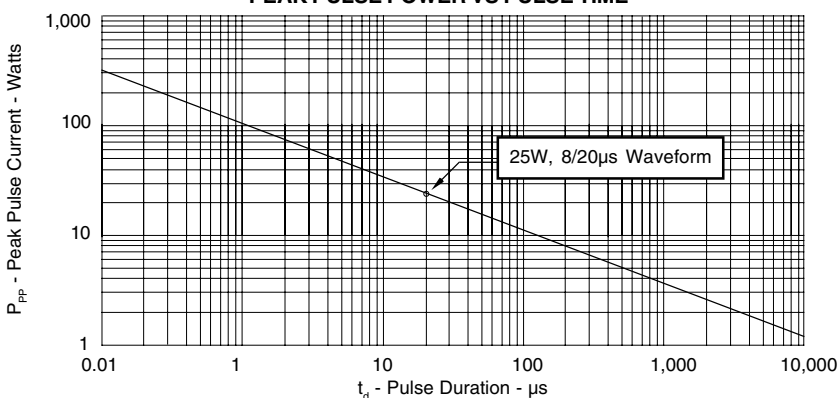


FIGURE 2
PULSE WAVE FORM


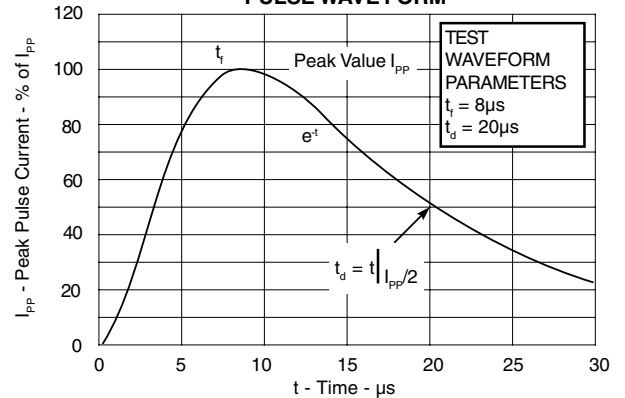
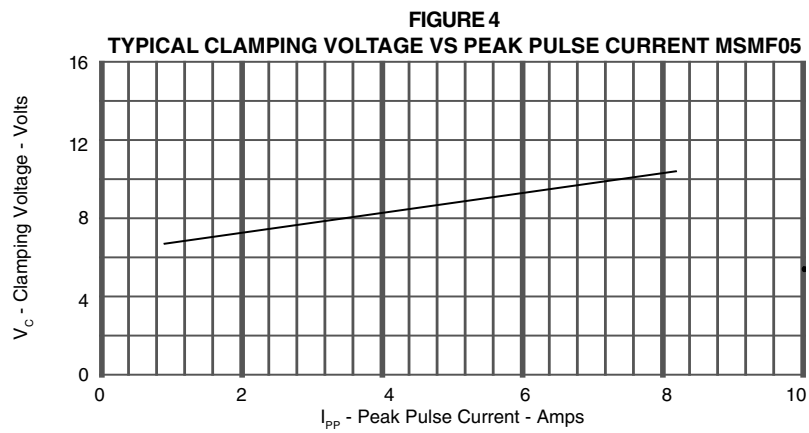


GRAPHS

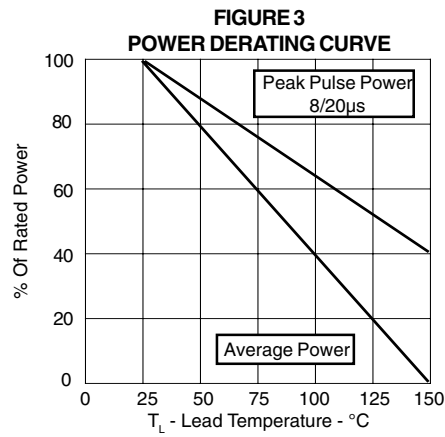


MSMF05LC

SOT-553 PACKAGE OUTLINE & DIMENSIONS

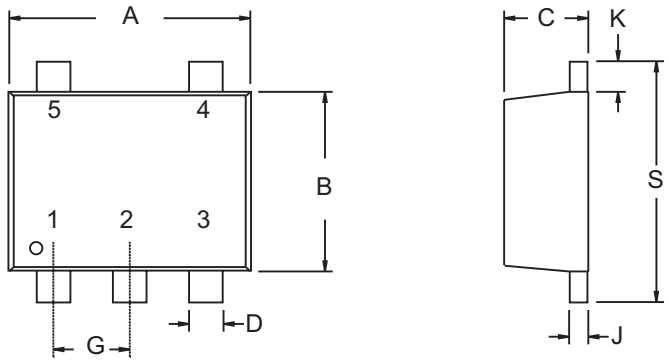PACKAGE OUTLINE		SOT-553																										
																												
PACKAGE DIMENSIONS																												
DIM	MILLIMETERS		INCHES																									
	MIN	MAX	MIN	MAX																								
A	1.50	1.70	0.059	0.067																								
B	1.10	1.30	0.043	0.051																								
C	0.50	0.60	0.020	0.024																								
D	0.17	0.27	0.007	0.011																								
G	0.50 BSC		0.020 BSC		-																							
J	0.08	0.16	0.003	0.007																								
K	0.10	0.30	0.004	0.012																								
S	1.50	1.70	0.059	0.067																								
MOUNTING PAD																												
<table border="1" style="margin: auto;"> <thead> <tr> <th colspan="3" style="text-align: center;">TYPICAL</th> </tr> <tr> <th style="text-align: center;">DIM</th> <th style="text-align: center;">Millimeters</th> <th style="text-align: center;">Inches</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">0.30</td> <td style="text-align: center;">0.012</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">1.02</td> <td style="text-align: center;">0.040</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">0.51</td> <td style="text-align: center;">0.020</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">1.40</td> <td style="text-align: center;">0.055</td> </tr> <tr> <td style="text-align: center;">5</td> <td style="text-align: center;">0.51</td> <td style="text-align: center;">0.020</td> </tr> </tbody> </table>			TYPICAL			DIM	Millimeters	Inches	1	0.30	0.012	2	1.02	0.040	3	0.51	0.020	4	1.40	0.055	5	0.51	0.020				<p>NOTES</p> <ol style="list-style-type: none"> 1. Dimensioning and tolerances per ANSI Y14.5M, 1985. 2. Controlling Dimension: Inches 3. Pin 3 is the cathode (Unidirectional Only). 4. Dimensions are exclusive of mold flash and metal burrs. <p>TAPE & REEL/BULK ORDERING NOMENCLATURE</p> <ol style="list-style-type: none"> 1. Surface mount product is taped and reeled in accordance with EIA-481. 2. Suffix - T7 = 7 Inch Reel - 3,000 pieces per 8mm tape, i.e., <i>MSMF05LC-T7</i>. 3. Suffix - T13 = 13 Inch Reel - 10,000 pieces per 8mm tape, i.e., <i>MSMF05LC-T13</i>. 4. Suffix - P = Lead-Free, Nickel-Paladium-Gold Plating, i.e., <i>MSMF05LC-P-T7</i>. <p style="text-align: right;">Outline & Dimensions: Rev 1 - 9/05, 06050</p>	
TYPICAL																												
DIM	Millimeters	Inches																										
1	0.30	0.012																										
2	1.02	0.040																										
3	0.51	0.020																										
4	1.40	0.055																										
5	0.51	0.020																										

Tape & Reel Specifications (Dimensions in millimeters)

Reel Dia.	Tape Width	A0	B0	K0	D	E	F	W	P0	P2	P	tmax
178mm (7")	8mm	1.78 ± 0.05	1.78 ± 0.05	0.69 ± 0.05	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

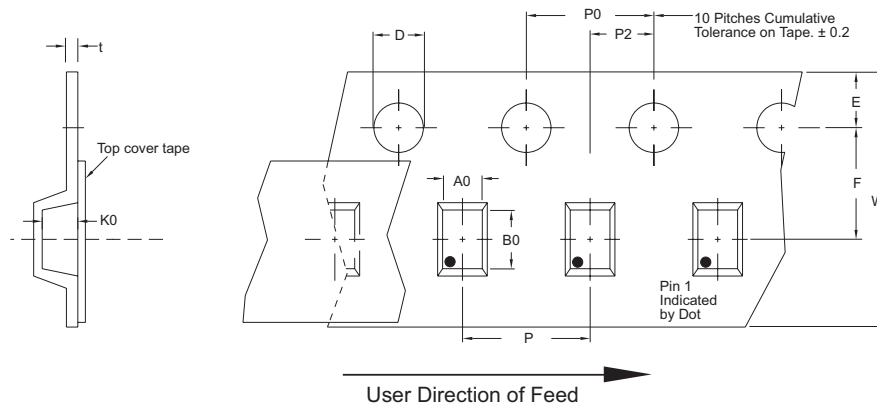

COPYRIGHT © ProTek Devices 2007

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
 2929 South Fair Lane, Tempe, AZ 85282
 Tel: 602-431-8101 Fax: 602-431-2288
 E-Mail: sales@protekdevices.com
 Web Site: www.protekdevices.com