


PHOTO INTERRUPTER PS4502

PHOTO INTERRUPTER


PACKAGE DIMENSIONS in millimeters (inches)

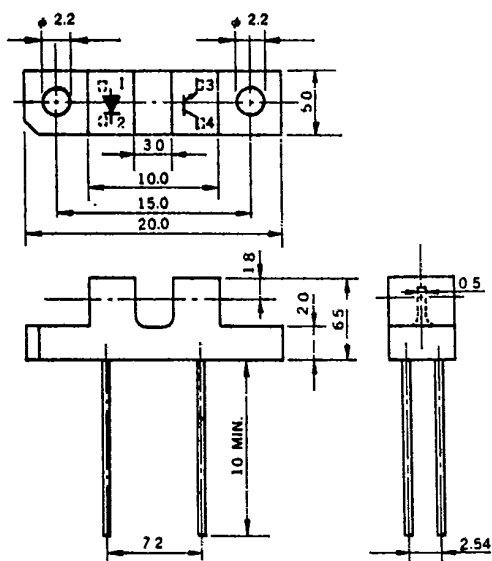

DESCRIPTION

The PS4502 photo coupled interrupter module containing a GaAs light emitting diode and an NPN silicon darlington connected photo-transistor.

CONNECTION DIAGRAM (Top View)

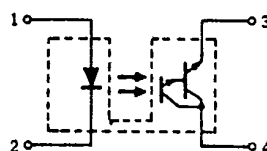

- 1. Anode
- 2. Cathode
- 3. Emitter
- 4. Collector

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Diode			
Reverse Voltage	V_R	5.0	V
Forward Current	I_F	50	mA
Power Dissipation	P_D	100	mW
Transistor			
Collector to Emitter Voltage	V_{CEO}	30	V
Collector Current	I_C	40	mA
Power Dissipation	P_C	100	mW
Storage Temperature	T_{stg}	-40 to +100	$^\circ\text{C}$
Operating Temperature	T_{opt}	-20 to +80	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTICS		SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Diode	Forward Voltage	V_F		1.1	1.4	V	$I_F = 10\text{ mA}$
	Reverse Current	I_R			10	μA	$V_R = 5.0\text{ V}$
	Junction Capacitance	C		100		pF	$V = 0, f = 1.0\text{ MHz}$
Transistor	Collector to Emitter Dark Current	I_{CEO}			400	nA	$V_{CE} = 10\text{ V}, I_F = 0$
Coupled	Output Current	I_C	10			mA	$I_F = 5\text{ mA}, V_{CE} = 2.0\text{ V}$
	Collector Saturation Voltage	$V_{CE(sat)}$			1.2	V	$I_F = 10\text{ mA}, I_C = 2\text{ mA}$

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

