

---

***DISCRETE POWER DIODES and THYRISTORS***  
***DATA BOOK***

---

## STANDARD RECOVERY DIODES

## Hockey Puk Version


### Features

- Wide current range
- High voltage ratings up to 4500V
- High surge current capabilities
- Diffused junction
- Hockey Puk version
- Case style DO-200AC (K-PUK)

2100A

### Typical Applications

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications

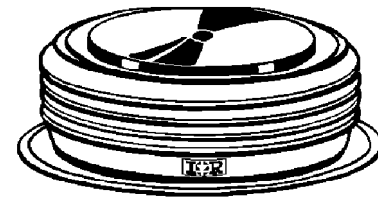

case style DO-200AC (K-PUK)

### Major Ratings and Characteristics

Parameters	SD1700C..K		Units	
	24 to 36	40 to 45		
$I_{F(AV)}$	2080	1875	A	
@ $T_{hs}$	55	55	°C	
$I_{F(RMS)}$	3600	3280	A	
@ $T_{hs}$	25	25	°C	
$I_{FSM}$	@ 50Hz	24000	20000	A
	@ 60Hz	25150	20950	A
$I^2t$	@ 50Hz	2890	2000	KA <sup>2</sup> s
	@ 60Hz	2630	1826	KA <sup>2</sup> s
$V_{RRM}$ range	2400 to 3600	4000 to 4500	V	
$T_J$	- 40 to 150	- 40 to 150	°C	

**ELECTRICAL SPECIFICATIONS**

## Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ $T_J = T_J$ max. mA
SD1700C..K	24	2400	2500	75
	30	3000	3100	
	36	3600	3700	
	40	4000	4100	
	45	4500	4600	

## Forward Conduction

Parameter	SD1700C..K		Units	Conditions		
	24 to 36	40 to 45				
$I_{F(AV)}$ Max. average forward current @ Heatsink temperature	2080(1000)	1875(920)	A	180° conduction, half sine wave		
	55(85)	55(85)	°C	Double side (single side) cooled		
$I_{F(RMS)}$ Max. RMS forward current	3600	3280	A	@ 25°C heatsink temperature double side cooled		
$I_{FSM}$ Max. peak, one-cycle forward, non-repetitive surge current	24000	20000	A	t = 10ms	No voltage reapplied	Sinusoidal halfwave, Initial $T_J = T_J$ max.
	25150	20950		t = 8.3ms		
	20200	16800		t = 10ms	50% $V_{RRM}$ reapplied	
	21150	17600		t = 8.3ms		
$I^2t$ Maximum $I^2t$ for fusing	2890	2000	KA <sup>2</sup> s	t = 10ms	No voltage reapplied	
	2630	1826		t = 8.3ms		
	2040	1415		t = 10ms	50% $V_{RRM}$ reapplied	
	1860	1292		t = 8.3ms		
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	28900	20000	KA <sup>2</sup> /s	t = 0.1 to 10ms, no voltage reapplied		
$V_{F(TO)1}$ Low level value of threshold voltage	0.89	0.88	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , $T_J = T_J$ max.		
$V_{F(TO)2}$ High level value of threshold voltage	1.02	0.99		$(I > \pi \times I_{F(AV)})$ , $T_J = T_J$ max.		
$r_{f1}$ Low level value of forward slope resistance	0.23	0.31	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , $T_J = T_J$ max.		
$r_{f2}$ High level value of forward slope resistance	0.21	0.29		$(I > \pi \times I_{F(AV)})$ , $T_J = T_J$ max.		
$V_{FM}$ Max. forward voltage drop	1.81	2.11	V	$I_{pk} = 4000A$ , $T_J = T_J$ max, $t_p = 10ms$ sinusoidal wave		

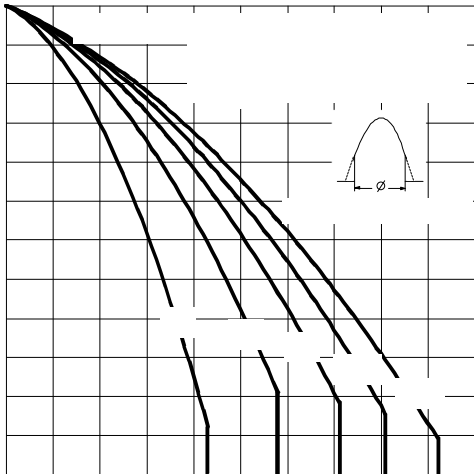


Fig. 3 - Current Ratings Characteristics

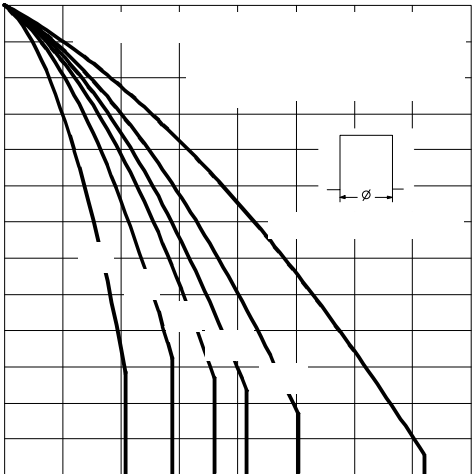


Fig. 4 - Current Ratings Characteristics

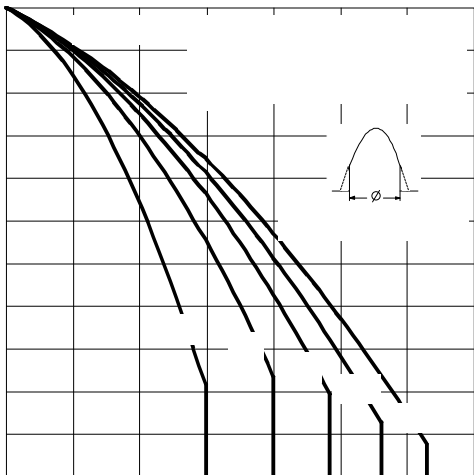


Fig. 5 - Current Ratings Characteristics

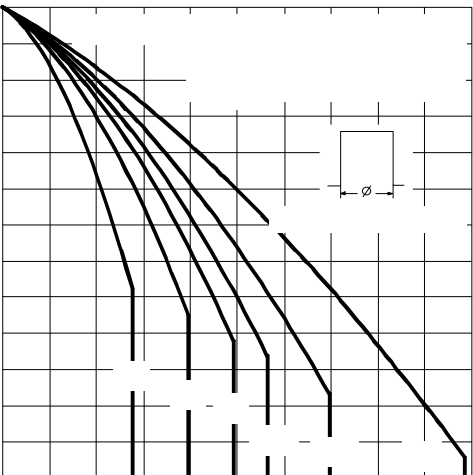


Fig. 6 - Current Ratings Characteristics

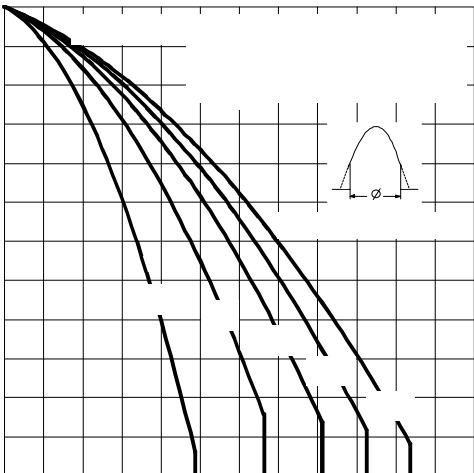


Fig. 7 - Current Ratings Characteristics

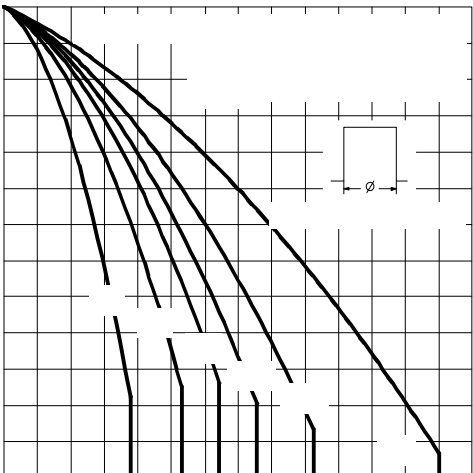


Fig. 8 - Current Ratings Characteristics

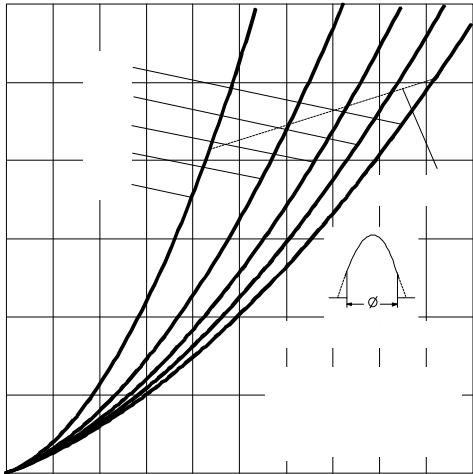


Fig. 9 - Forward Power Loss Characteristics

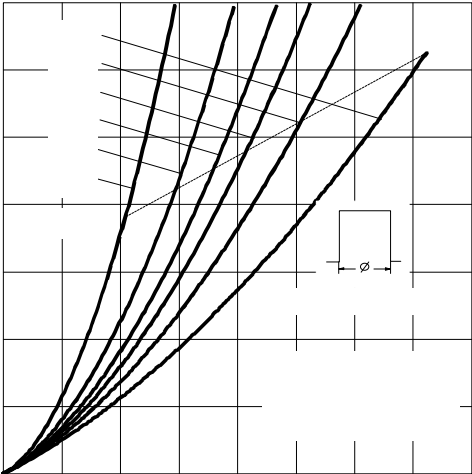


Fig. 10 - Forward Power Loss Characteristics

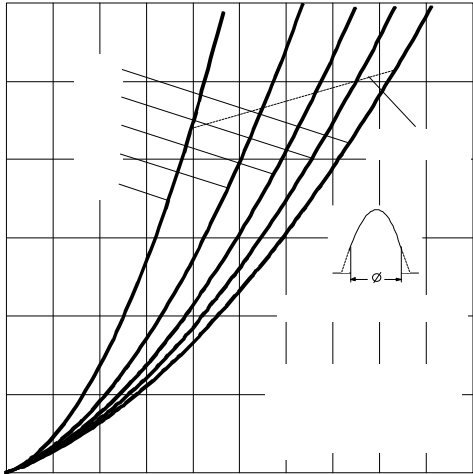


Fig. 11 - Forward Power Loss Characteristics

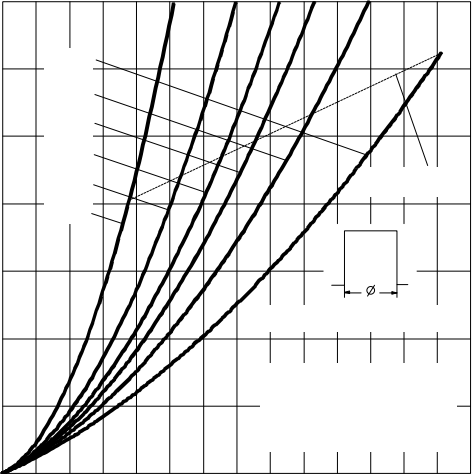


Fig. 12 - Forward Power Loss Characteristics

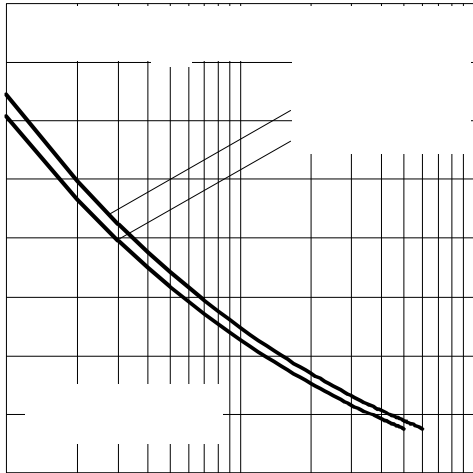


Fig. 13 - Maximum Non-Repetitive Surge Current

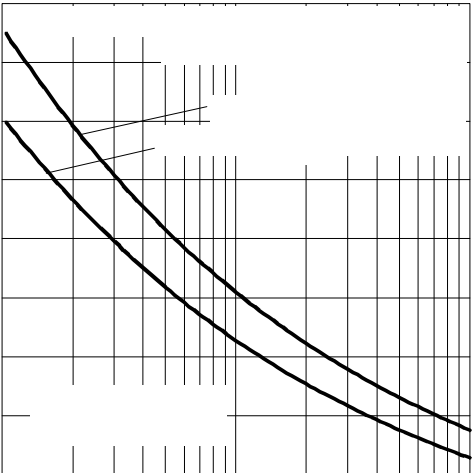


Fig. 14 - Maximum Non-Repetitive Surge Current

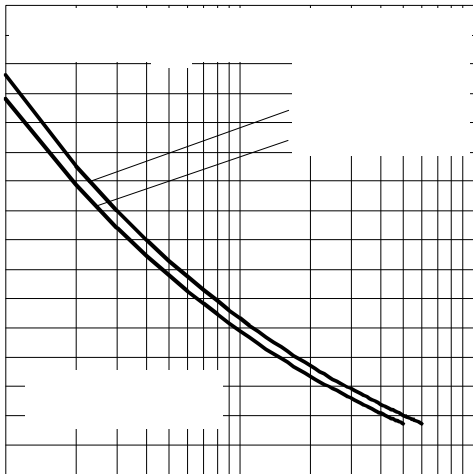


Fig. 15 - Maximum Non-Repetitive Surge Current Single and Double Side Cooled

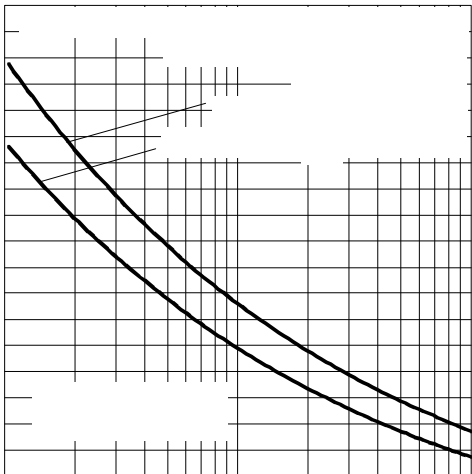


Fig. 16 - Maximum Non-Repetitive Surge Current Single and Double Side Cooled

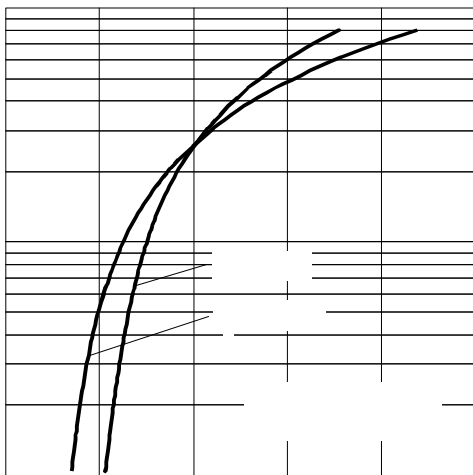


Fig. 17 - Forward Voltage Drop Characteristics

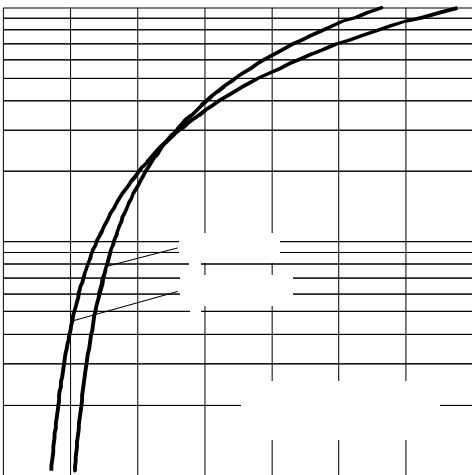


Fig. 18 - Forward Voltage Drop Characteristics

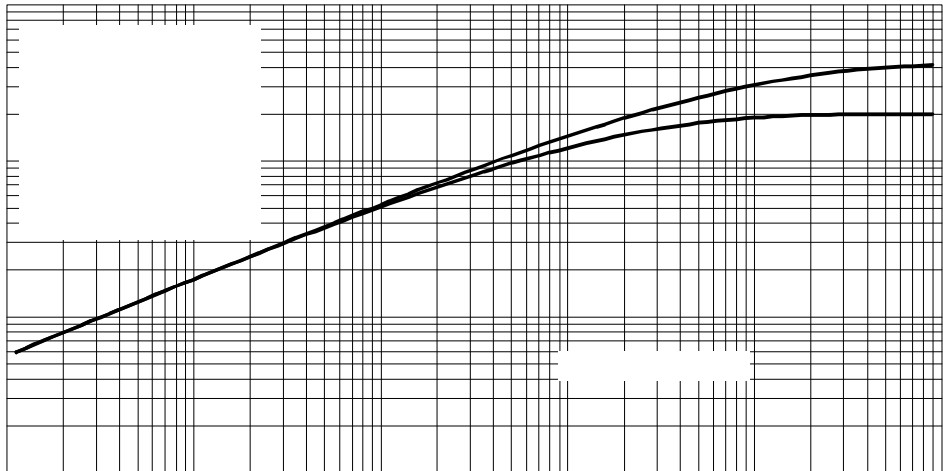


Fig. 19 - Thermal Impedance  $Z_{thJC}$  Characteristics

## Thermal and Mechanical Specifications

Parameter	SD1700C..K		Units	Conditions
	24 to 36	40 to 45		
T <sub>J</sub> Max. junction operating temperature range	-40 to 150	-40 to 150	°C	
T <sub>stg</sub> Max. storage temperature range	-55 to 200	-55 to 200		
R <sub>thJ-hs</sub> Max. thermal resistance, junction to heatsink	0.042 0.020		K/W	DC operation single side cooled DC operation double side cooled
F Mounting force, ± 10%	22250 (2250)		N (Kg)	
wt Approximate weight	425		g	
Case style	DO-200AC (K-PUK)			See Outline Table

 $\Delta R_{thJ-hs}$  Conduction

(The following table shows the increment of thermal resistance  $R_{thJ-hs}$  when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.002	0.002	0.001	0.001	K/W	T <sub>J</sub> = T <sub>J</sub> max.
120°	0.002	0.002	0.002	0.002		
90°	0.003	0.003	0.003	0.003		
60°	0.004	0.004	0.004	0.004		
30°	0.007	0.007	0.007	0.007		

## Ordering Information Table

Device Code	
<b>1</b>	- Diode
<b>2</b>	- Essential part number
<b>3</b>	- 0 = Standard recovery
<b>4</b>	- C = Ceramic Puk
<b>5</b>	- Voltage code: Code x 100 = V <sub>RRM</sub> (See Voltage Ratings table)
<b>6</b>	- K = Puk Case DO-200AC (K-PUK)

Outline Table

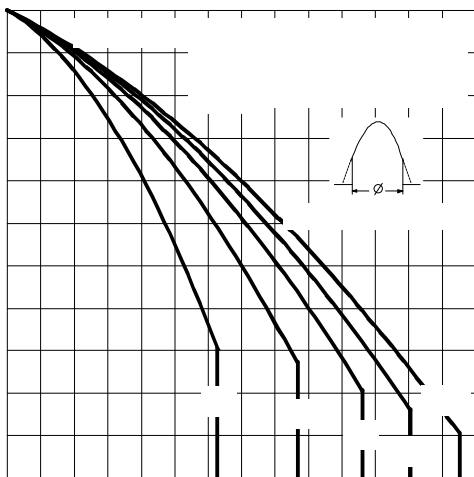
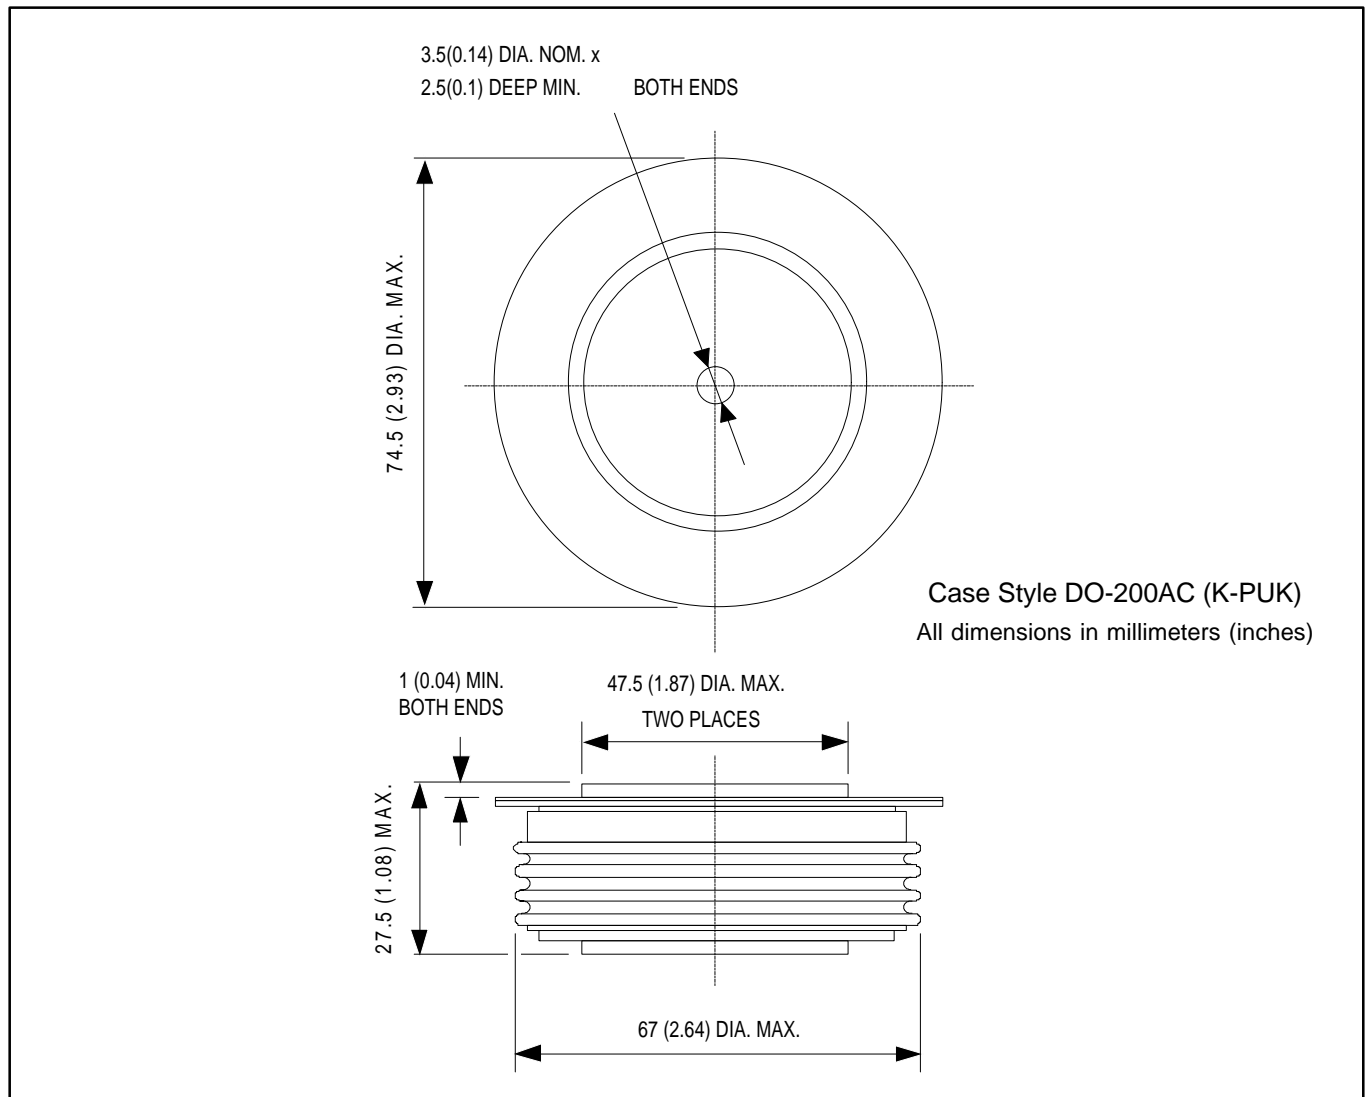


Fig. 1 - Current Ratings Characteristics

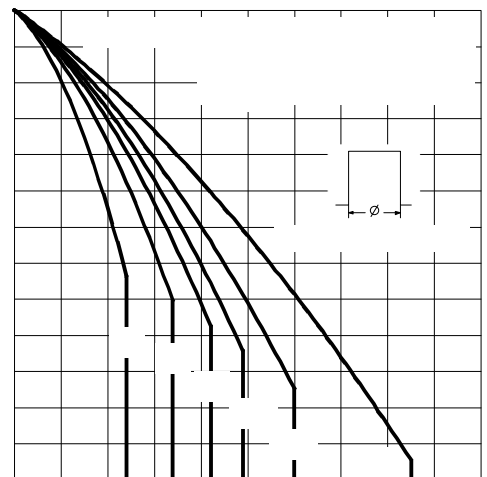


Fig. 2 - Current Ratings Characteristics