




D2SB05 - D2SB80

Single Phase 1.5 AMPS. Glass Passivated Bridge Rectifiers

GBL

Features

- ✧ Glass passivated chip junction
- ✧ Ideal for printed circuit board
- ✧ High case dielectric strength
- ✧ Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- ✧ Typical IR less than 0.1 μ A
- ✧ High surge current capability
- ✧ High temperature soldering guaranteed: 260°C / 10 seconds / .375" (9.5mm) lead lengths.

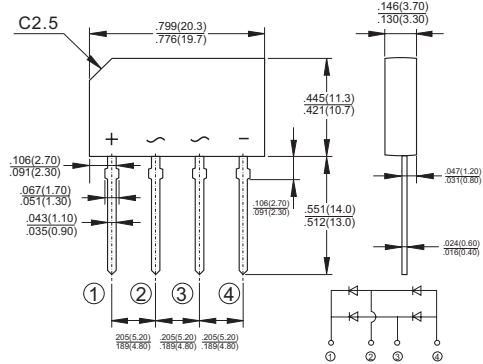

Mechanical Data

- ✧ Case: Molded plastic body.
- ✧ Terminals: Pure tin plated, Lead free. leads solderable per MIL-STD-750, Method 2026.
- ✧ Weight: 0.071 ounce, 2.0 grams
- ✧ Mounting position: Any

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	D2SB 05	D2SB 10	D2SB 20	D2SB 40	D2SB 60	D2SB 80	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	V
Maximum Average Forward Rectified Current @ $T_A = 50^\circ\text{C}$	$I_{(AV)}$	1.5						A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	80						A
Rating for fusing (t<8.3ms) (t<10ms)	I^2t	27 32						A ² sec
Maximum Instantaneous Forward Voltage @ 0.75A	V_F	1.05						V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	I_R	10 500						μ A μ A
Typical Thermal Resistance Per Leg (Note)	$R_{\theta JA}$ $R_{\theta JL}$	47 10						$^\circ\text{C}/\text{W}$
Operating Temperature Range	T_J	-55 to +150						$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to + 150						$^\circ\text{C}$

Notes 1: Units Mounted In Free Air No Heat Sink On PCB 0.5x0.5 " (12x12mm) Copper Pads, 0.375"(9.5mm) Lead Length.

RATINGS AND CHARACTERISTIC CURVES (D2SB05 THRU D2SB80)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

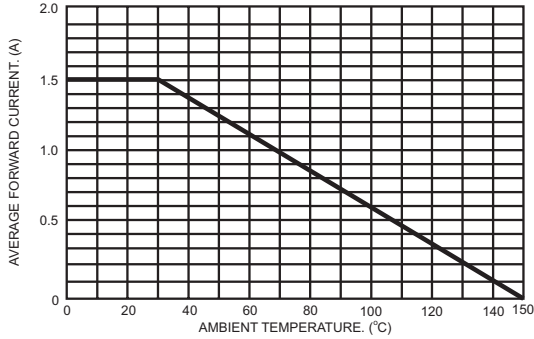


FIG.2- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

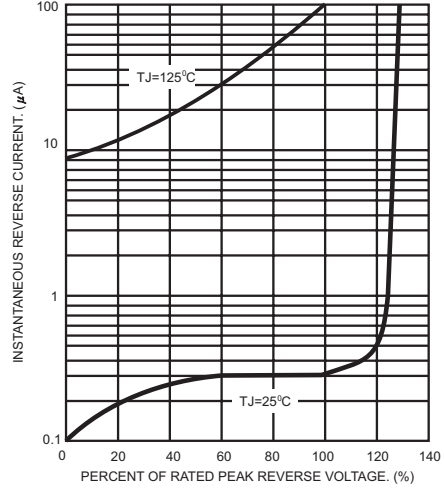


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

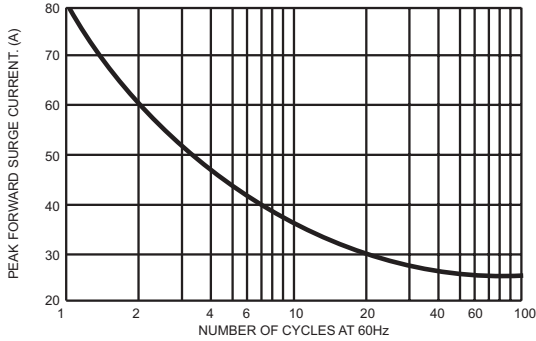


FIG.4- TYPICAL JUNCTION CAPACITANCE

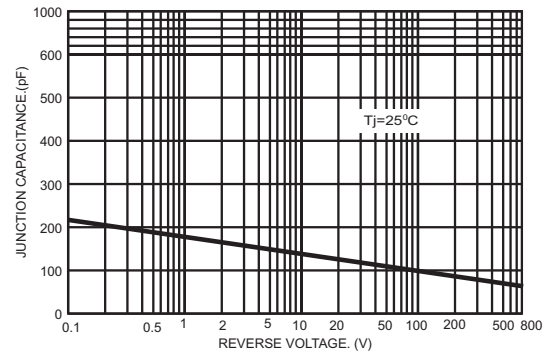


FIG.5- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

