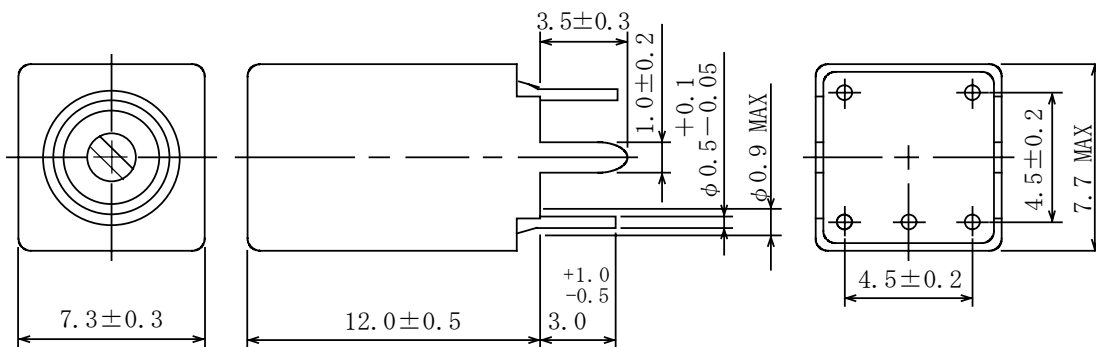


Type: S-7GD
◆ Product Description


- 7.7×7.6mm Max.(L×W), 12.5mm Max. Height.
- Inductance:0.1~1.0 μ H Max.
- Operating frequency: 300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.


◆ Feature

- Variable shielded type.
- RoHS Compliance

◆ Dimensions (mm)


- * Dimension does not include solder used on coil.
- * Pin pitch should be measured at the root of terminal.

◆ Connection (Bottom View)


“S” is winding start

◆ Specification (Part No. 0237-T250)

Item	(1-3)	Measuring Condition
Inductance	0.47μH±8% Variable	25.2MHz
Unloaded Qu	55 Min.	25.2MHz