
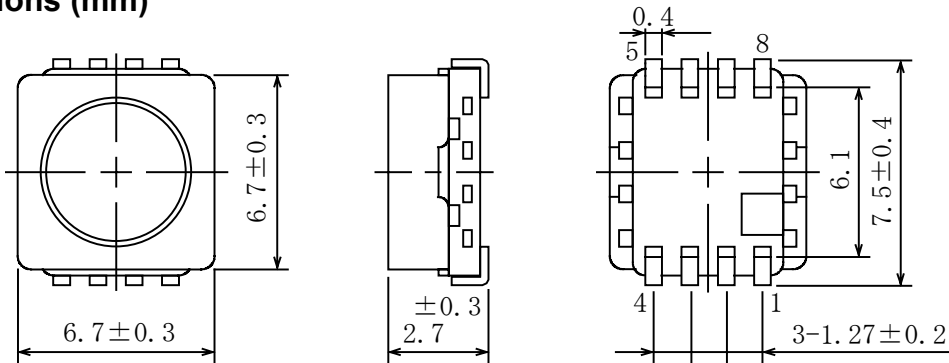
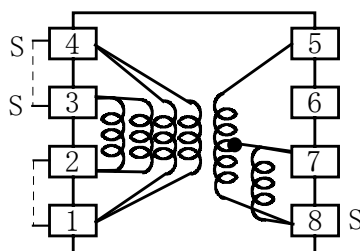


**Type: CLQ72**
**◆ Product Description**


- 7.0×7.0mm Max.(L×W), 3.0mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.


**◆ Feature**

- Magnetically shielded construction.
- Max. Operating frequency 1MHz, Max. Operating power 800mW(1MHz)
- Ideally used in LCD TV, Digital camera.
- RoHS Compliance

**◆ Dimensions (mm)**

**◆ Schematics (Bottom)**

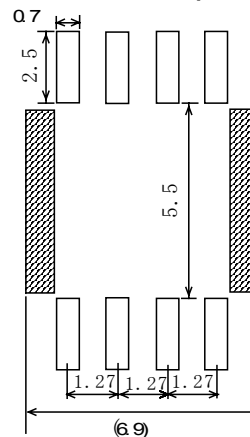
“S” is winding start.

**◆ Land Pattern (mm)**

**◆ Specification**

Sample No.	Inductance (8-5) 1kHz/1V	D.C.R. (4-1) at20°C	D.C.R.(3-2) at20°C	D.C.R.(8-7) at20°C
6333 – T554	83μH ± 30% Within	364m Ω Max.	223m Ω Max.	540m Ω Max.