

isc Silicon PNP Darlington Power Transistor

2SB765

DESCRIPTION



- High DC Current Gain-
: $h_{FE} = 1000(\text{Min}) @ I_C = -1.5\text{A}$
- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = -120\text{V}(\text{Min})$
- Low Collector-Emitter Saturation Voltage-
: $V_{CE(\text{sat})} = -1.5\text{V}(\text{Max}) @ I_C = -1.5\text{A}$
- Complement to Type 2SD864

APPLICATIONS

- Medium speed and power switching applications.

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-120	V
V_{CEO}	Collector-Emitter Voltage	-120	V
V_{EBO}	Emitter-Base Voltage	-7	V
I_C	Collector Current-Continuous	-3	A
I_{CM}	Collector Current-Peak	-6	A
P_C	Collector Power Dissipation $T_C = 25^\circ\text{C}$	30	W
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature Range	-55~150	°C

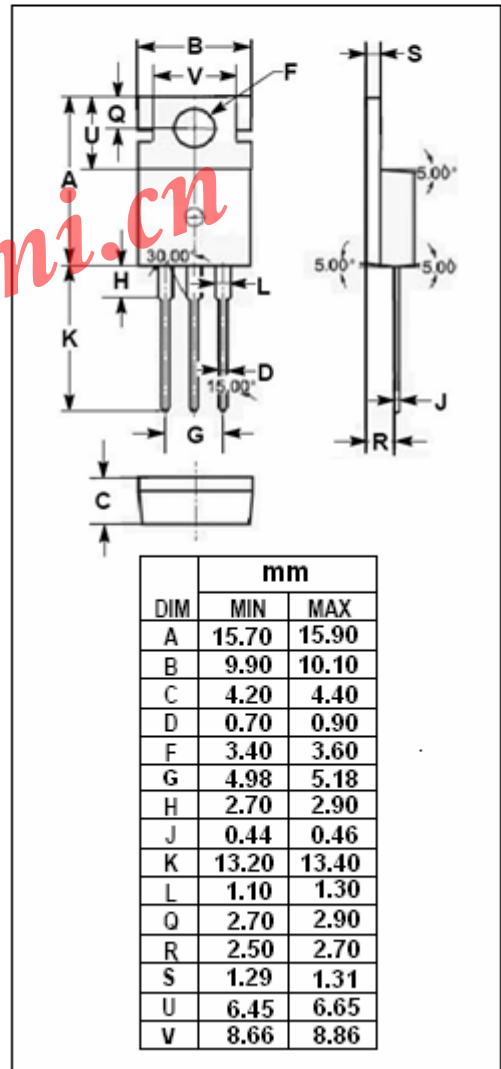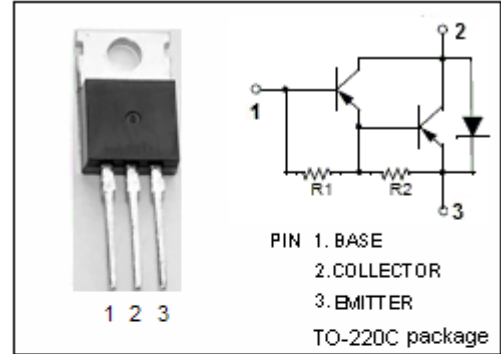

isc Silicon PNP Darlington Power Transistor

2SB765

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C = -25\text{mA}$, $R_{BE} = \infty$	-120			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E = -50\text{mA}$, $I_C = 0$	-7			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C = -1.5\text{A}$, $I_B = -3\text{mA}$			-1.5	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C = -3\text{A}$, $I_B = -30\text{mA}$			-3.0	V
$V_{BE(sat)-1}$	Base-Emitter Saturation Voltage	$I_C = -1.5\text{A}$, $I_B = -3\text{mA}$			-2.0	V
$V_{BE(sat)-2}$	Base-Emitter Saturation Voltage	$I_C = -3\text{A}$, $I_B = -30\text{mA}$			-3.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = -120\text{V}$, $I_E = 0$			-100	μA
I_{CEO}	Collector Cutoff Current	$V_{CE} = -100\text{V}$, $R_{BE} = \infty$			-10	μA
h_{FE}	DC Current Gain	$I_C = -1.5\text{A}$; $V_{CE} = -3\text{V}$	1000		20000	

Switching times

t_{on}	Turn-on Time	$I_C = -1.5\text{A}$; $I_{B1} = -I_{B2} = -3\text{mA}$		0.8		μs
t_{stg}	Storage Time			3.0		μs
t_f	Fall Time			1.5		μs