

RF AMPLIFIER

MODEL *TM5155*

Available as: TM5155, 4 Pin TO-8 (T4)
 TN5155, 4 Pin Surface Mount (SM3)
 FP5155, 4 Pin Flatpack (FP4)
 BX5155, Connectorized Housing (H1)

Features

- High 3rd Order Intercept: +37 dBm Typical
- Medium Gain: 15 dB Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5-300 MHz	5-300 MHz
Gain (dB)	15.0	15.0 ± 1.0 Min
Power @ 1 dB Comp. (dBm)	>+22	+21 Min.
Reverse Isolation (dB)	-17	-16 Max.
VSWR In Out	<1.75:1 <1.75:1	2.0:1 Max. 2.0:1 Max.
Noise Figure (dB)	<5	6.0 Max.
Power Vdc mA	+15 85	+15 Min. 90 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point.....+54 dBm (Typ.)
 Second Order Two Tone Intercept Point.....+48 dBm (Typ.)
 Third Order Two Tone Intercept Point.....+37 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 17 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

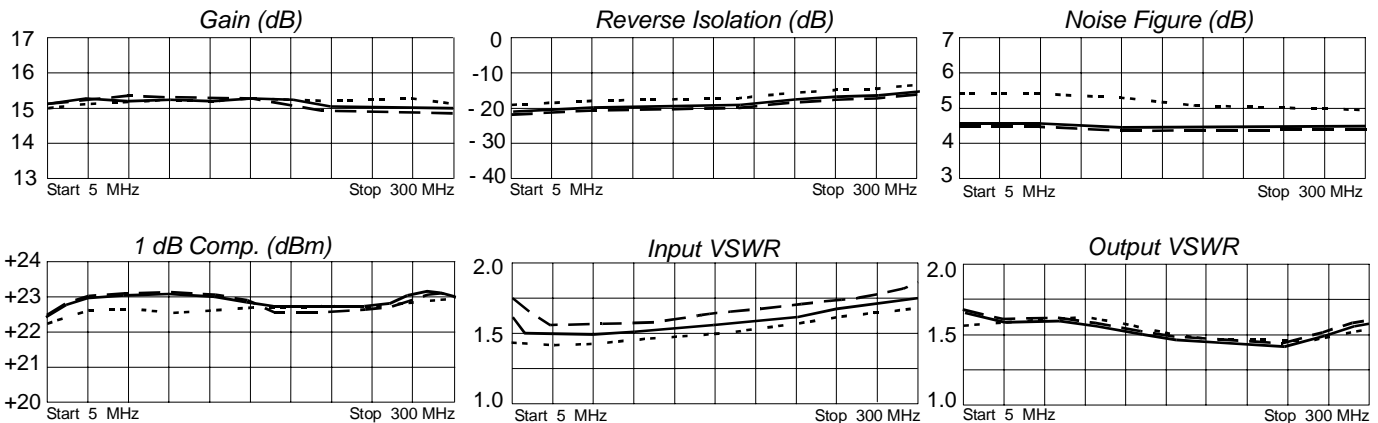

Legend ——— + 25 °C - - - + 85 °C ····· -55 °C

Linear S-Parameters

FREQ. MHz	---S11---		---S21---		---S12---		---S22---	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.24	-30	5.73	-166	.090	15	.25	53
10	.20	-20	5.86	-175	.092	8	.23	25
50	.19	-19	5.86	168	.094	5	.22	-15
100	.19	-33	5.90	152	.101	4	.19	-41
150	.20	-50	5.88	137	.109	5	.18	-68
200	.21	-71	5.87	122	.120	3	.15	-105
300	.24	-111	5.59	91	.143	-5	.18	-163



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

6/17/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001