


VDC1698 Receiver Protector

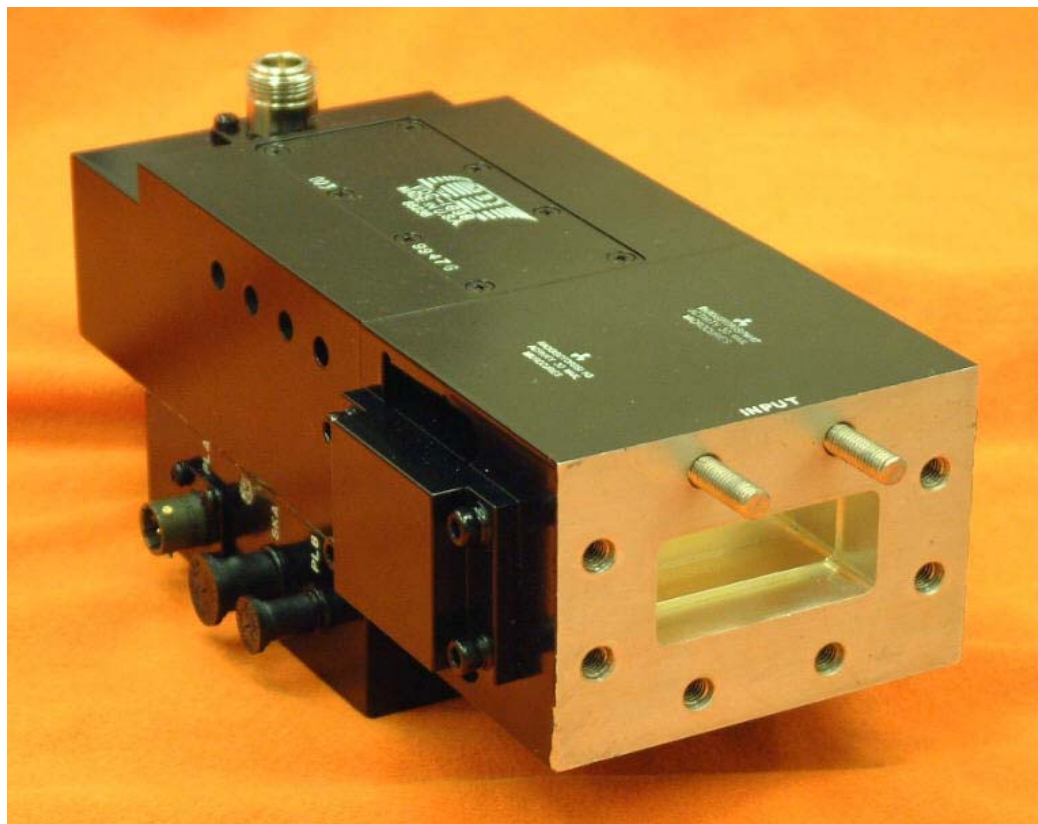

Features:

- Frequency: 5.4 - 5.9 GHz
- Peak Power:
 - Overload: 64 kW max
 - Normal Operating: 15 kW max
- Duty Cycle: 0.024 max
- Pulsewidth: 20 μ Sec max
- Insertion Loss: 0.8 dB max
- VSWR: 1.4:1 max
- Flat Leakage: 15 mW max
- Spike Leakage (active): 15 mw max
- Recovery Time: 5 μ Sec max
- Blanking Isolation: 60 dB min
- WR187 waveguide

Description:

C-Band receiver protector with integral blanking and BITE circuitry.

150 Sohier Road
Beverly, Massachusetts 01915



Phone: 978-922-6000 Fax: 978-922-2736
E-Mail: marketing@bmd.cpii.com
Internet: www.cpii.com/bmd