


Preliminary



HO4006

640.0 MHz SAW Oscillator



Dip 16-8 Case

- **SAW Frequency Stabilization**
- **Fundamental-Mode Oscillation at 640.0 MHz**
- **A Rugged, Compact General-Purpose Oscillator**

The frequency of this oscillator is stabilized by surface-acoustic-wave (SAW) technology. This results in excellent performance from a compact, rugged, oscillator operating at the fundamental frequency of 640.0 MHz. The highly-reliable HO4006 makes it suitable for general purpose use in a wide variety of applications

Electrical Characteristics

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Operating Frequency	Absolute Frequency	f_o	1, 7		640.0		MHz
	Tune Range			639.900		640.100	MHz
	Tune Voltage			0		+5	VDC
	Tuning Linearity				2:1	3:1	
RF Output Power		P_o	3, 6	+7	+10		dBm
Discrete Spurious	Second Harmonics		2, 3, 4			-15	dBc
	Third and Higher Harmonics					-20	
	Nonharmonic				-80		
SSB Phase Noise	1 kHz Offset		2, 3, 4		-115	-105	dBc/Hz
	10 kHz Offset				-135	-130	
	100kHz Offset				-160		
RF Impedance	Nominal Impedance	Z_o	3		50		Ω
	Operating Load VSWR	G_L	3, 5			2:1	
DC Power Supply	Operating Voltage	V_{CC}	3, 6	4.75	5.0	5.25	VDC
	Operating Current	I_{CC}			35	45	mA
Operating Ambient Temperature		T_A	3, 6	-20		+70	$^{\circ}C$
Lid Symbolization (YY=Year, WW=Week)	RFM HO4006 YYWW						




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling. COCOM CAUTION: Approval by the U.S. Department of Commerce is required prior to export of this device.


Notes:

1. One or more of the following United States patents apply:
2. Unless noted otherwise, all specifications are listed at $T_A = +25^{\circ}C \pm 2^{\circ}C$, $V_{CC} =$ nominal voltage ± 0.01 VDC, and load impedance = 50Ω with $V_{SWR} \leq 1.5:1$.
3. The design, manufacturing process, and specification of this device are subject to change without notice.
4. Applies to oscillator only and not to sidebands caused by external electrical or mechanical sources. (Dedicated external voltage regulation with low-frequency filtering for the DC power supply and proper circuit board layout are recommended for optimum spectral purity.)
5. For specified maximum operating load VSWR (any angle) at F_o . (No instability or damage will occur for any passive load impedance.)
6. For any combination of V_{CC} and T_A within the specified operating ranges.
7. Applies for any combination of Note 5 and 6 conditions.

BLOCK DIAGRAM




ELECTRICAL CONNECTIONS

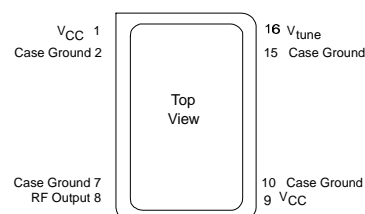

640.0 MHz Voltage Controlled SAW Oscillator

DIP16-8

Metal Dual-In-Line Package with 8 leads in a 16-lead DIP configuration

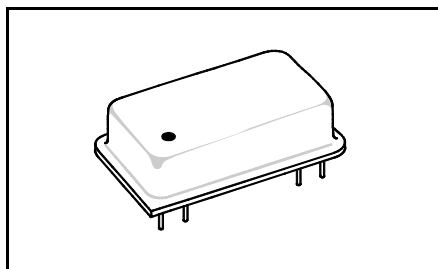

Dimension	mm		Inches	
	MIN	MAX	MIN	MAX
A	—	25.02	—	0.985
B	—	12.83	—	0.505
C	—	6.35	—	0.250
D	0.40	0.51	0.016	0.020
E	0.64 Nominal		0.025 Nominal	
F	7.62 Nominal		0.300 Nominal	
G	2.54 Nominal		0.100 Nominal	
H	17.78 Nominal		0.700 Nominal	
K	3.39	6.73	0.130	0.265
L	1.30	—	0.051	—
M	—	11.18	—	0.440
N	—	22.60	—	0.890
R	1.75	2.26	0.069	0.089

