

规格书编号

SPEC NO :

# 产品规格书

# SPECIFICATION

CUSTOMER 客户: \_\_\_\_\_  
PRODUCT 产品: **SAW FILTER**  
MODEL NO 型号: **HDVF45A5Dc SIP5Dc**  
PREPARED 编制: \_\_\_\_\_ CHECKED 审核: \_\_\_\_\_  
APPROVED 批准: \_\_\_\_\_ DATE 日期: **2007-11-2**

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司  
Shoulder Electronics Limited



**1.SCOPE**


SHOULDER’s SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal. piezoelectrical chip. they are used in electronic equipments such as TV and so on.

**2.Construction**


**2.1 Dimension and materials**

Manufacturer’s name :SHOULDER ELECTRONICS LIMITED

Type : VF45A5Dc

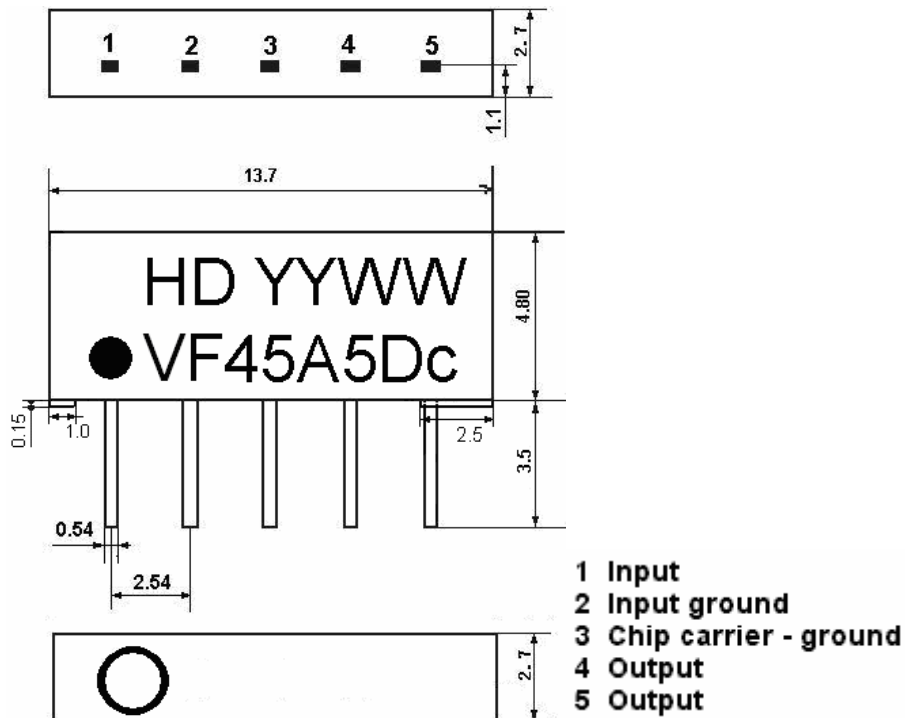


YY:year  
WW:week

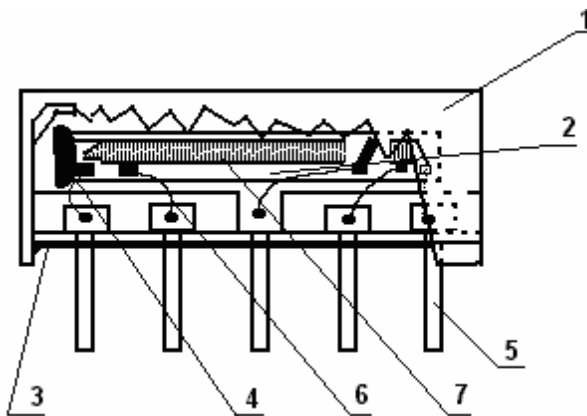

Components	Materials
1.Outer casing	PPS
2.Substrate	Lithium niobate
3.Base	Epoxy resin
4.Absorber	Epoxy resin
5.Lead	Cu alloy+Au plate
6.Bonding wire	AlSi alloy
7.Electrode	Al

**2.2. Circuit construction, measurement circuit**

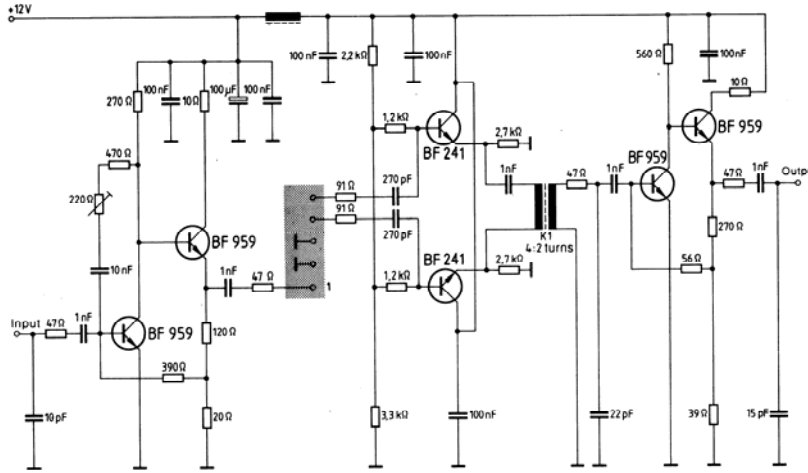

Test circuit for SIP-5 filter  
Input impedance of the symmetrical post-amplifier: 2 kΩ in parallel with 3 pF

**3.Characteristics**

Items	Conditions	Specifications
Standard atmospheric conditions	Unless otherwise specified , the standard rang of atmospheric conditions for making measurements and tests is as follows; Ambient temperature : 15°C to 35°C Relative humidity : 25% to 85% Air pressure : 86kPa to 106kPa	There shall be no damage.
Operating temperature rang	Operating temperature rang is the rang of ambient temperatures in which the filter can be operated continuously. -10°C ~ +60°C	
Storage temperature rang	Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage. Conditions are as specified elsewhere in these specifications. -40°C ~ +70°C	
Reference temperature	+25°C	

**3.1 Maximum Rating**

<b>DC voltage</b>	<b>VDC</b>	<b>12</b>	<b>V</b>	<b>Between any terminals</b>
-------------------	------------	-----------	----------	------------------------------

### 3.2 Electrical Characteristics

Source impedance

$Z_s=50\ \Omega$

Load impedance


$Z_L=2k\ \Omega //3pF$

$T_A=25\ ^\circ C$

Item	Freq	min	typ	max	
Insertion attenuation	44.06MHz	11.2	12.7	14.2	dB
Relative attenuation Reference level (at 45.75MHz)	45.81MHz	5.2	6.2	7.2	dB
	42.23MHz	-0.5	0.2	0.9	dB
	41.98MHz	0.2	0.9	1.6	
	41.31MHz	22.0	37.0	-	dB
	39.81MHz	48.0	63.0	-	dB
	47.31MHz	46.0	57.0	-	dB
Sidelobe	35.06~39.81 MHz	40.0	45.0	-	dB
	47.31 ~55.06MHz	37.0	42.0	-	dB
Temperature coefficient of frequency 温度系数		-72			Ppm/k

### 3.3 Environmental Performance Characteristics


Item	Condition	Specifications												
High temperature	The specimen shall be store at a temperature of $80\pm 2\ ^\circ C$ for $96\pm 4h$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.	Mechanical characteristics and specifications in electrical characteristics shall be satisfied. There shall be no excessive change in appearance.												
Low temperature	The specimen shall be store at a temperature of $-20\pm 3\ ^\circ C$ for $96\pm 4h$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.													
Humidity	The specimen shall be store at a temperature of $40\pm 2\ ^\circ C$ with relative humidity of 90% to 96% for $96\pm 4h$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.													
Thermal shock	The specimen shall be subjected to 8 continuous cycles each as shown below. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.													
	<table border="1"> <thead> <tr> <th></th> <th>Temperature</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>+25\ ^\circ C \Rightarrow -40\ ^\circ C</math></td> <td>0.5h</td> </tr> <tr> <td>2</td> <td><math>-40\ ^\circ C</math></td> <td>4h</td> </tr> <tr> <td>3</td> <td><math>-40\ ^\circ C \Rightarrow +85\ ^\circ C</math></td> <td>2h</td> </tr> </tbody> </table>		Temperature	Duration	1	$+25\ ^\circ C \Rightarrow -40\ ^\circ C$	0.5h	2	$-40\ ^\circ C$	4h	3	$-40\ ^\circ C \Rightarrow +85\ ^\circ C$	2h	
	Temperature	Duration												
1	$+25\ ^\circ C \Rightarrow -40\ ^\circ C$	0.5h												
2	$-40\ ^\circ C$	4h												
3	$-40\ ^\circ C \Rightarrow +85\ ^\circ C$	2h												

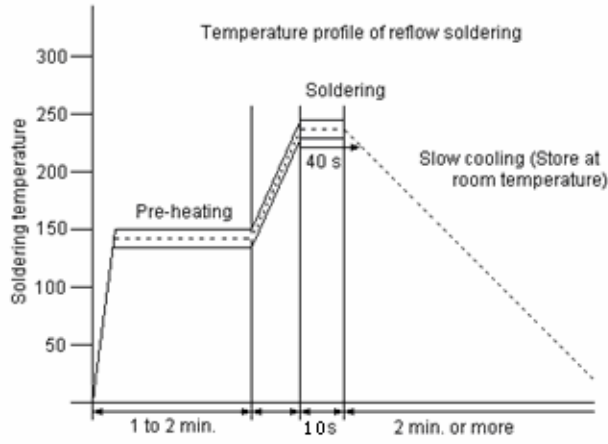	4	+85 °C	4h	
	5	+85 °C=>+25 °C	0.5h	
	6	+25 °C	1h	
Resistance to Soldering heat	<p>Reflow soldering method Peak: 255 ±5 °C, 220 ±5 °C, 40s At electrode temperature of the specimen.</p>  <p>The specimen shall be passed through the reflow furnace with the condition shown in the above profile for 1 time. The specimen shall be stored at standard atmospheric conditions for 1h, after which the measurement shall be made. Test board shall be 1.6 mm thick. Base material shall be glass fabric base epoxy resin.</p>			
Solder ability	Immerse the pins melt solder at 260°C+5/-0°C for 5 sec.		More then 95% of total area of the pins should be covered with solder	


**3.4 Mechanical Test**

Items	Conditions	Specifications
Vibration	600-3300rpm amplitude 1.5mm 3 directions 2 H each	There shall be no damage.
Drop	On maple plate from 1 m high 3 times	
Lead pull	Pull with 1 kg force for 30 seconds	
Lead bend	90° bending with 500g weigh 2 times	


**3.5 Voltage Discharge Test**

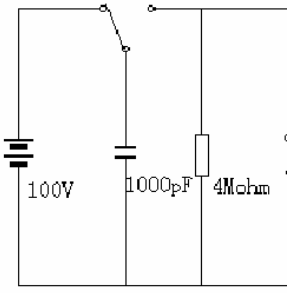Item	Condition	Specifications
Surge	Between any two electrode 	There shall be no damage

**3.6 Frequency response:**

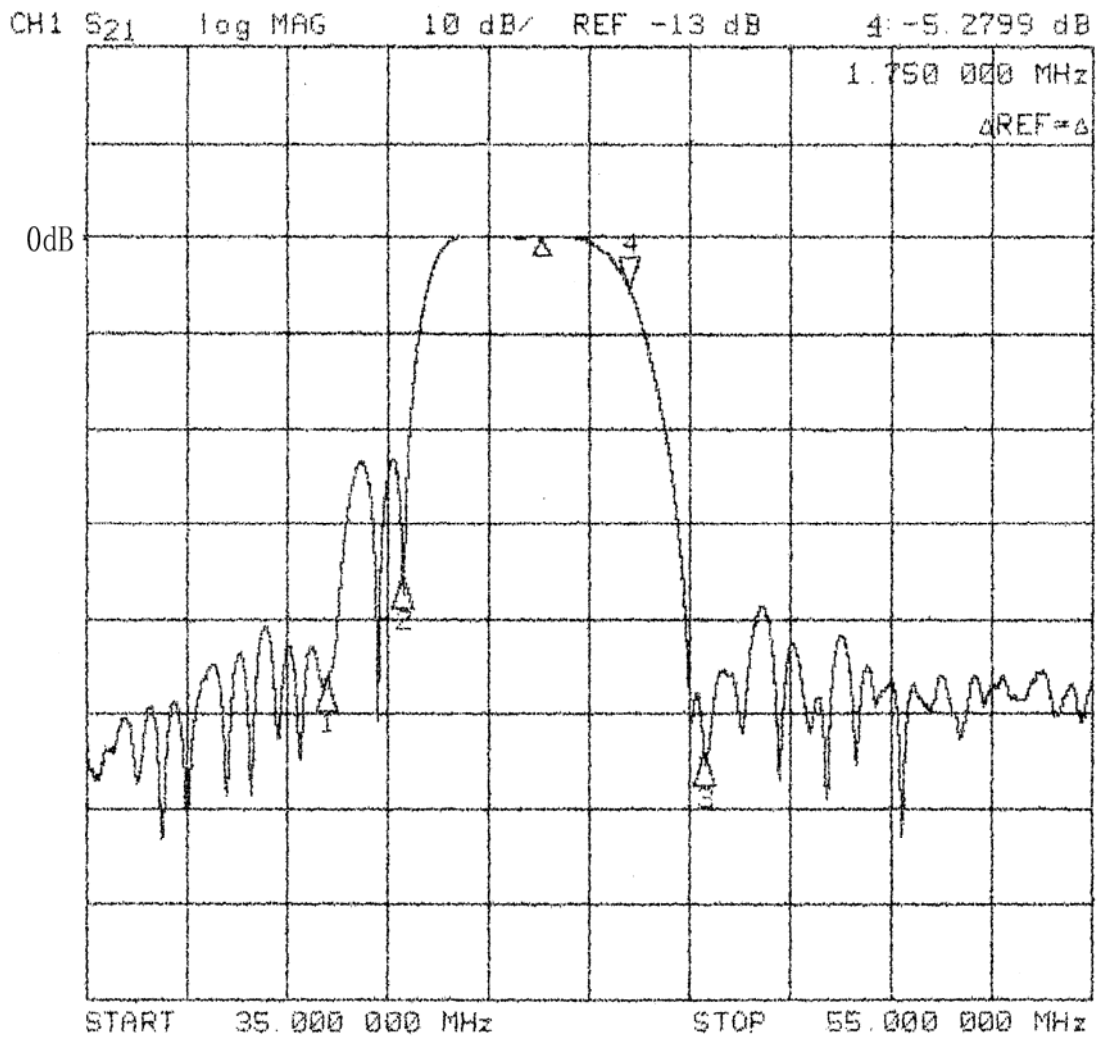


CH1 S21 delay 30 ns/ REF 1.238  $\mu$ s 2 -3.6239 ns  
CH2 S21 log MAG 1 dB/ REF -13.86 dB 2 -0.0078 dB

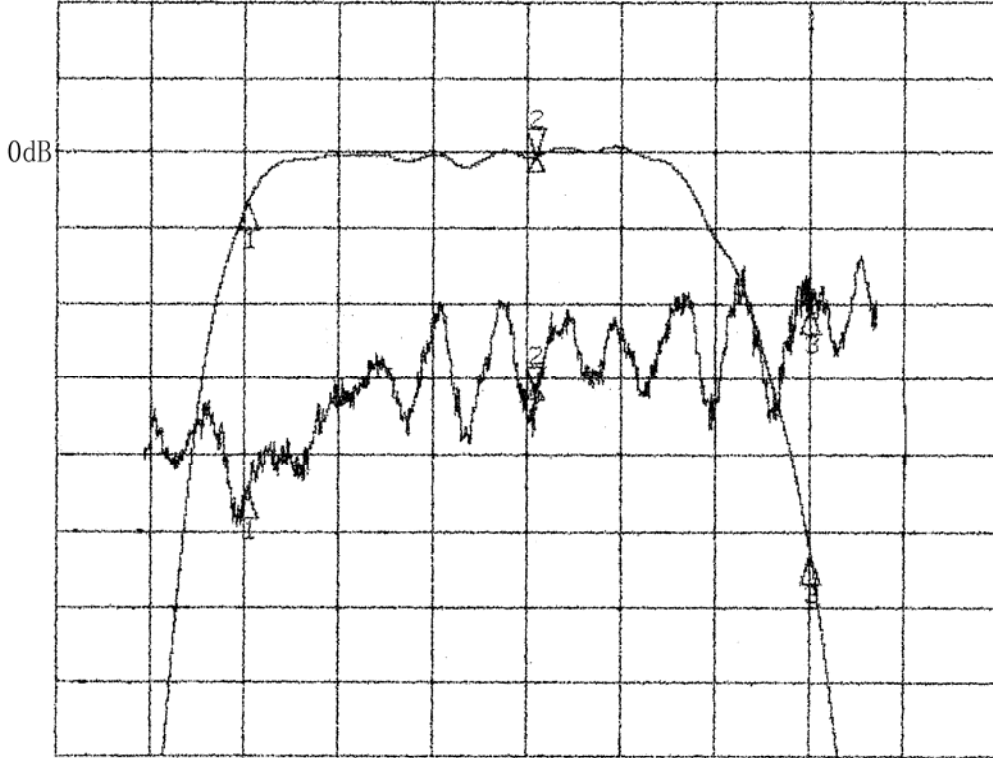

START 41.000 000 MHz STOP 47.000 000 MHz

CH1 S21 log MAG 10 dB/ REF -13.47 dB

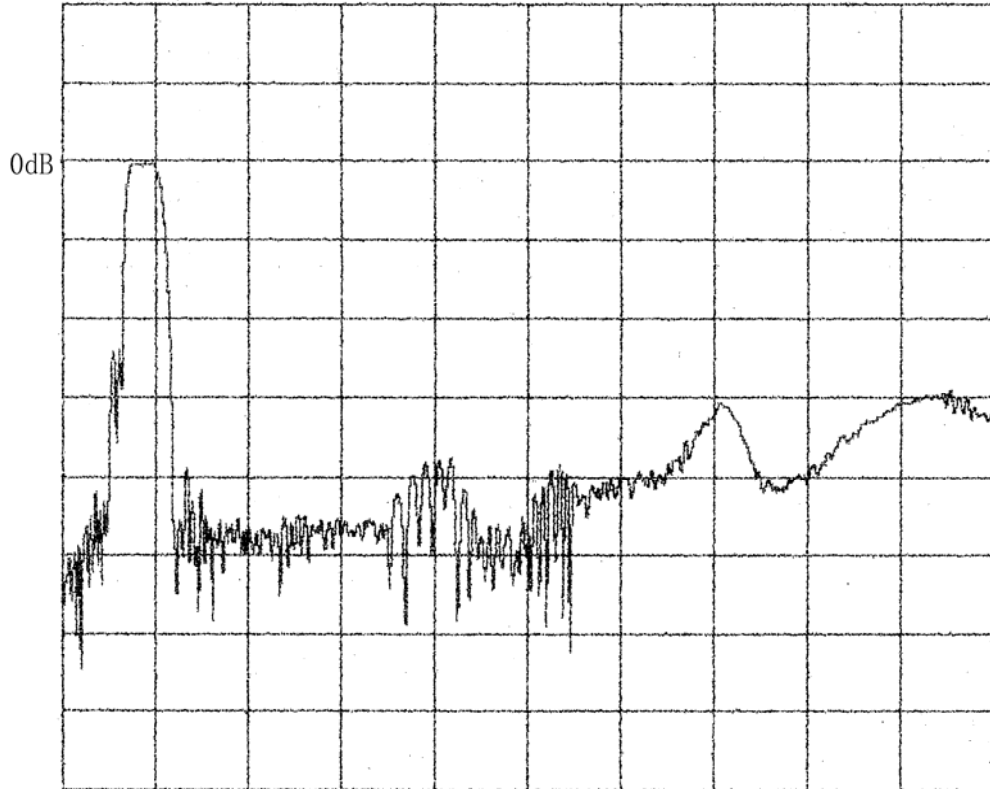

START 35.000 000 MHz STOP 135.000 000 MHz