


FRDRO

P/N: JXWBFRDRO-T-9390

Frequency(MHz)	9390
Power Output(dBm)	10-12
Phase Noise(dBc/Hz)	-85 @ 10KHz
	-115 @ 100KHz
Mechanical Tuning(MHz)	+/-60
Electrical Tuning(MHz)	15
Electrical Tuning Voltage(V)	0-15
Supply Voltage(V)	+12
Supply Current(mA)	80 max
Harmonics(dBc)	-30 max
Spurious(dBc)	-80 max
Temperature Stability	±6ppm/°C
	±1dB
Load Pulling(KHz)	+/-100
Pushing(ppm/V)	212(200KHz/V)
Operating Temperature(°C)	-40 ~ +85
Storage Temperature(°C)	-55 ~ +90
Connector	SMA-Female
Net Weight(Kg)	0.07 Around

Outline Drawing (Size: mm)

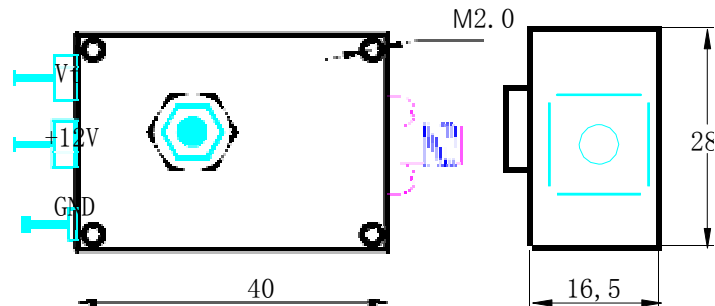

Data subject to change without notice. For current data sheets, please contact: sales@aacix.com