

SOT-223



**Pin Definition:**

1. Input
2. Ground (tab)
3. Output

### General Description

TSP4264 is a 5V low-drop fixed-voltage regulator in an SOT-223 package. The IC regulates an input voltage in the range of  $5.5V < V_{IN} < 45V$  to  $V_{OUT} \text{ (rated)} = 5.0V$ . The maximum output current is more than 150mA. This IC is designed with short circuit-proof and features temperature protection that disables the circuit at over-temperature.

### Features

- Fixed Output Voltage 5V
- Output Voltage Tolerance  $\pm 2\%$
- 150mA Current Capability
- Ultra Low Dropout Voltage
- Over Temperature Protection
- Very Low Current Consumption 400uA (max.)
- Short-Circuit Proof
- Reverse Polarity Proof
- Wide Temperature Polarity Range
- Suitable for use in Automotive Electronics
- AEC-Q100 Qualified


### Ordering Information

Part No.	Package	Packing
TSP4264CW50 RP	SOT-223	2.5Kpcs / 13" Reel

### Pin Definition and Function

Pin	Symbol	Function
1	Input	Block to ground directly on IC with ceramic capacitor
2	Ground	Ground
3	Output	Block to ground with 10uF capacitor, ESR < 10Ω

### Block Diagram

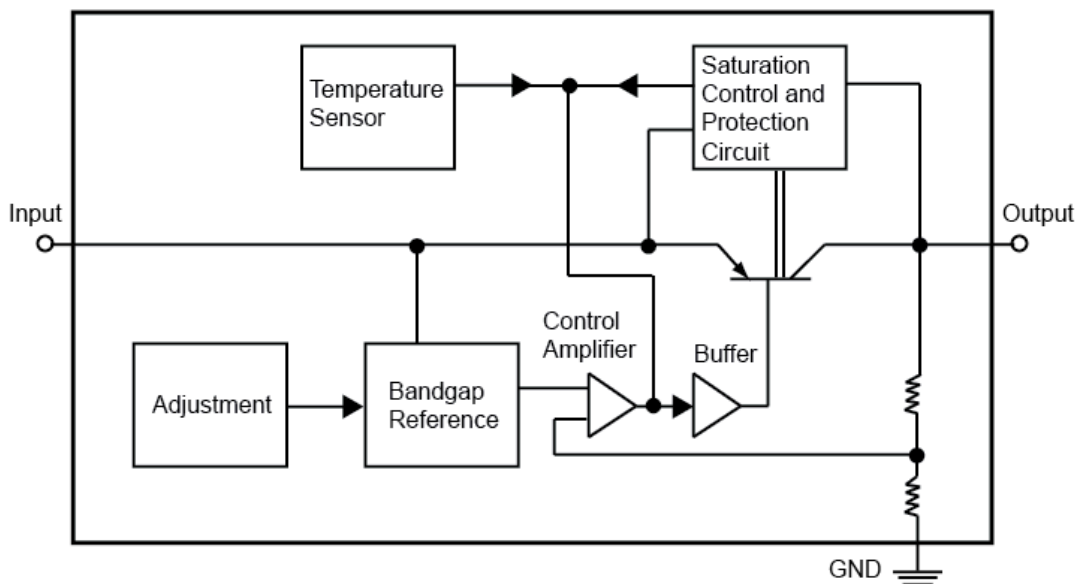

### Absolute Maximum Rating

Parameter	Symbol	Limit Values		Unit	Notes
		Min.	Max.		
Input Voltage	$V_{IN}$	-42	45	V	
Input Voltage (Operating Range)	$V_{IN(OPR)}$	5.5	45	V	
Input Current	$I_{IN}$	--	--	--	Internally Limited
Output Voltage	$V_{OUT}$	-0.3	32	V	
Output Current	$I_{OUT}$	--	--	--	Internally Limited
Ground Current	$I_{GND}$	50	--	mA	
Junction Temperature	$T_J$	--	150	°C	
Junction Temperature (Operating Range)	$T_{J(OPR)}$	-40	150	°C	
Storage Temperature	$T_{STG}$	-50	150	°C	

### Thermal Performance

Parameter	Symbol	Limit Values		Unit	Notes
		Min.	Max.		
Thermal Resistance Junction-Ambient	$R\theta_{JA}$	--	80	°C/W	
Thermal Resistance Junction-Pin	$R\theta_{JP}$	--	17	°C/W	

**Note:** Measured to pin 2 (tab)


### Electrical Characteristics $V_{IN}=13.5V$ , $-40 \leq T_J \leq +150$ , unless otherwise specified.

Parameter	Symbol	Limit Values			Unit	Notes
		Min.	Typ.	Max.		
Output Voltage	$V_{OUT}$	4.90	5.0	5.10	V	$6V \leq V_{IN} \leq 28V$ , $5mA \leq I_o \leq 100mA$
Output Current Limit	$I_{OUT}$	120	150	--	mA	
Current Consumption	$I_Q$	--	--	400	uA	$I_o=1mA$
		--	10	15	mA	$I_o=100mA$
Dropout Voltage (Note)	$V_{DROP}$	--	0.25	0.5	V	$I_o=100mA$
Load Regulation	$REG_{LOAD}$	--	50	90	mV	$5mA \leq I_o \leq 100mA$ , $V_{IN}=13.5V$
Line Regulation	$REG_{LINE}$	--	15	30	mV	$6V \leq V_{IN} \leq 28V$ , $I_o=5mA$
Ripple Rejection	PSRR	--	54	--	dB	$f=100Hz$ , $V_R=0.5V_{PP}$

**Note:** Dropout voltage =  $V_{IN} - V_{OUT}$

(Measured where  $V_{OUT}$  has dropped 100mV from the nominal value obtained at  $V_{IN} = 13.5V$ )

### Typical Application Circuit

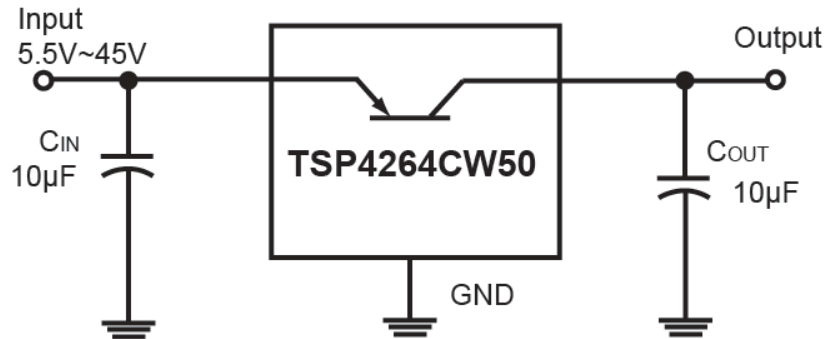

### Application Information


#### Dimensioning Information on External Components

The input capacitor  $C_{IN}$  is necessary for compensating line influences. Using a resistor of approx.  $1\Omega$  in series with  $C_{IN}$ , the oscillating of input inductivity and input capacitance can be clamped. The output capacitor  $C_{OUT}$  is necessary for the stability of the regulating circuit. Stability is guaranteed at values  $C_{OUT} \geq 10\mu F$  and an  $ESR \leq 10\Omega$  within the operating temperature range.


#### Circuit Description

The control amplifier compares a reference voltage, which is kept highly precise by resistance adjustment, to a voltage that is proportional to the output voltage and drives the base of the series transistor via a buffer. Saturation control, working as a function of load current, prevents any over-saturation of the power element. The IC is additionally protected against overload, over temperature and reverse polarity


**Electrical Characteristics Curve**

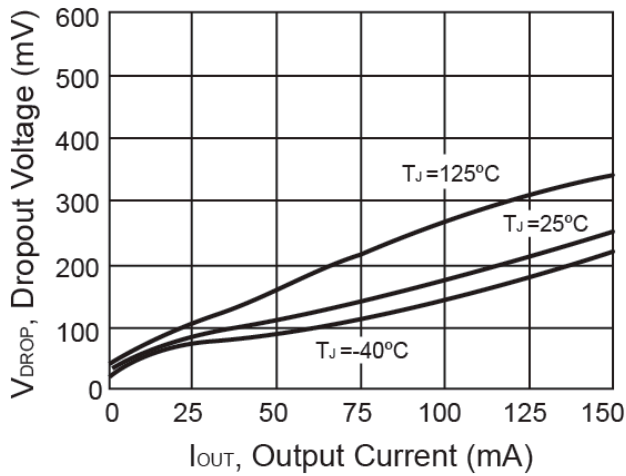


**Figure 1. Output Voltage vs. Input Voltage**

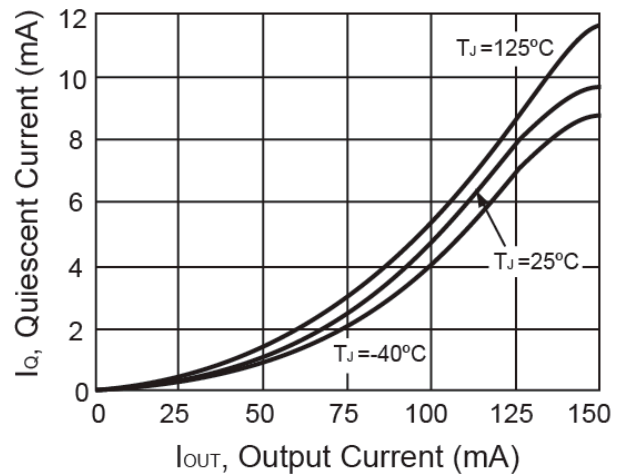


**Figure 2. Quiescent Current vs. Output Current**

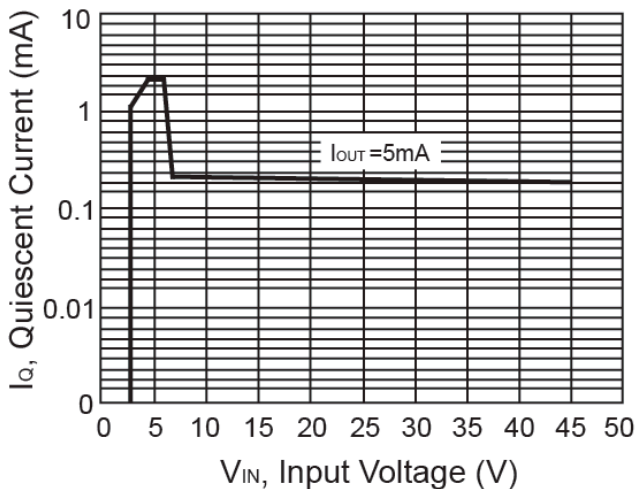


**Figure 3. Quiescent Current vs. Input Voltage**

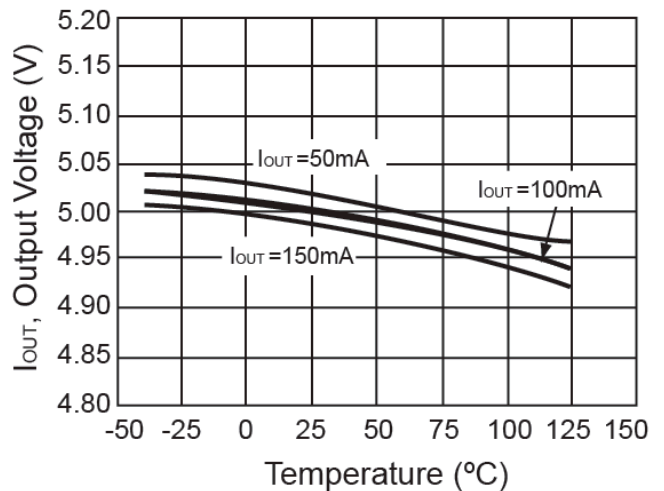

**Figure 4. Output Current vs. Temperature**

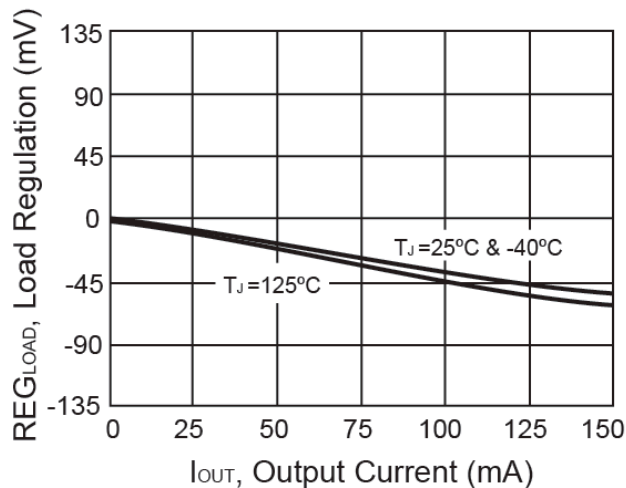


**Figure 5. Load Regulation vs. Output Current**

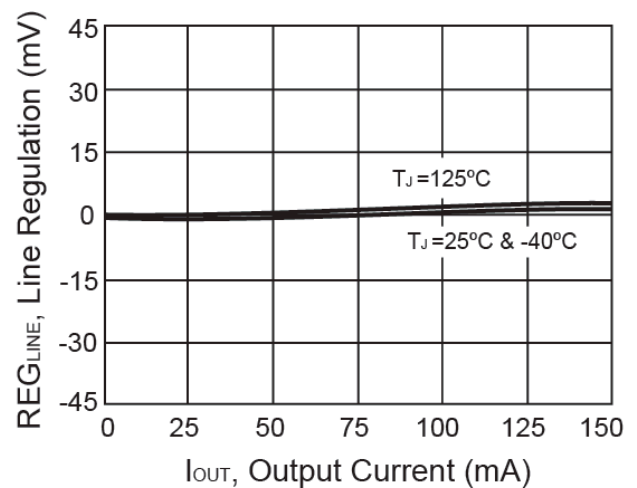


**Figure 6. Line Regulation vs. Output Current**

### SOT-223 Mechanical Drawing

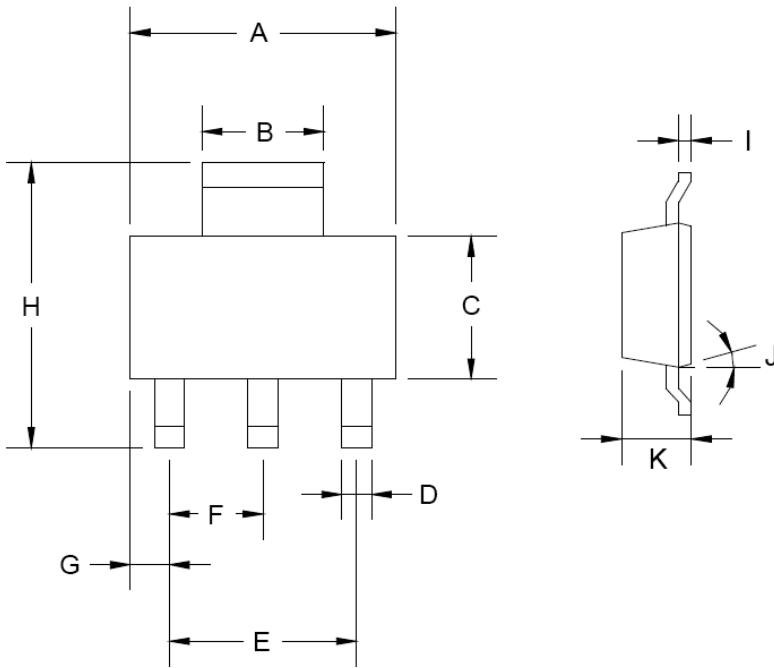

SOT-223 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.350	6.850	0.250	0.270
B	2.900	3.100	0.114	0.122
C	3.450	3.750	0.136	0.148
D	0.595	0.635	0.023	0.025
E	4.550	4.650	0.179	0.183
F	2.250	2.350	0.088	0.093
G	0.835	1.035	0.032	0.041
H	6.700	7.300	0.263	0.287
I	0.250	0.355	0.010	0.014
J	10°	16°	10°	16°
K	1.550	1.800	0.061	0.071

### Marking Diagram

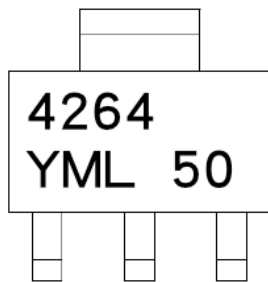

**50** = Fixed 5V Output Voltage

**Y** = Year Code

**M** = Month Code

(**A**=Jan, **B**=Feb, **C**=Mar, **D**=Apr, **E**=May, **F**=Jun, **G**=Jul, **H**=Aug, **I**=Sep, **J**=Oct, **K**=Nov, **L**=Dec)

**L** = Lot Code

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.