


## TERMINAL BLOCKS

- 5.08mm pitch
- Professional rising clamp
- 1.5mm<sup>2</sup> wire acceptance
- Rating 17.5/50V
- Colour green
- UL/CE approved
- Interlocking

## SPECIFICATION


**Rating:** 17.5A/250 Volts  
**Dielectric Strength:** >2KV  
**Insulation Resistance:** >5MΩ  
**Working temperature:** -20°C to 125°C  
**Short Period:** 160°  
**Moulding:** UL94V-0 flame retardant nylon 66 (Green)

## 5.08mm PITCH VERTICAL MOUNT

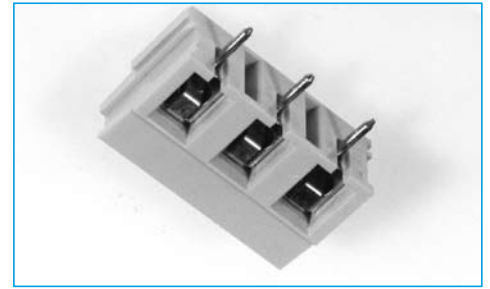

**Pin/terminal:** 5 micron tinned nickel plated brass  
**Rising clamp:** Nickel plated brass  
**Screw/torque:** M3 Zinc Steel/0.5Nm, colour passivated and tropicalised  
**Recommended PCB hole size:** ø1.3mm<sup>2</sup>

## OUTLINE DRAWING

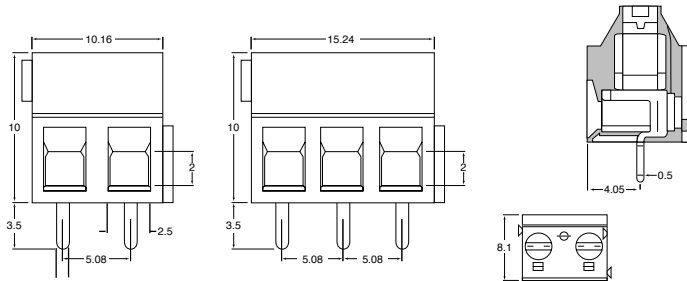

## ORDERING INFORMATION

<b>DBC</b>	<b>TB</b>	<b>13</b>	<b>/2</b>
Dubilier Connectors	Series Terminal Block	Style	Nº of Ways 2 = 2 ways 3 = 3 ways
* Other Number of ways are available up to 12 Please consult office for further details			

## TERMINAL BLOCKS


- 5.08mm Pitch
- Rising Clamp Terminal
- 2 - 12 pole interlocking
- 2.5mm<sup>2</sup> wire acceptance
- UL/CE/VDE approved

## SPECIFICATION


### Electrical Characteristics

**Rating Current:** 17.5/250V  
**Contact Resistance:** >125kV  
**Insulation Resistance:** ≥5mΩ  
**Operating Temperature:** -20°C to +125°C

## 5.08mm 45° PITCH RISING CLAMP

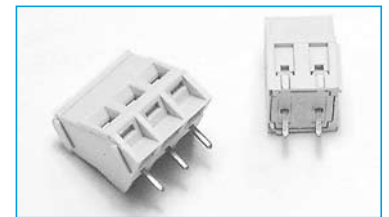

## OUTLINE DRAWING

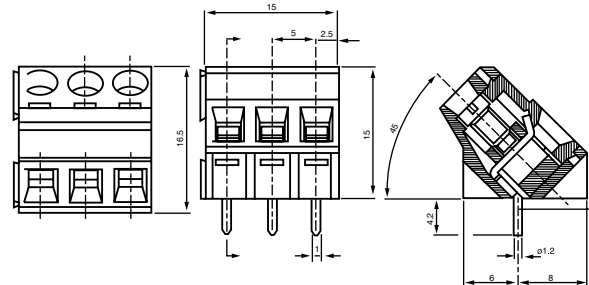

## ORDERING INFORMATION

<b>DBC</b>	<b>TB</b>	<b>46</b>	<b>/2</b>
Dubilier Connectors	Series Terminals Blocks	Style 46 = Style 46	No of Ways 2 = 2ways 3 = 3ways
* other number of ways are available, Please consult the office for further details			