


SPDT Switch

P/N: JXWBKG-2-0.5-18

Frequency Range(GHz)	0.5-18
Insertion Loss(dB)	3.5
Isolation(dB)	60
VSWR	2.0
Switching Speed(ns)	50 max
Power Handling(W)	1 CW max
Operating Temperature(°C)	-55 ~ + 85
Storage Temperature(°C)	-65 ~ +125

Outline Drawing (Size: mm)

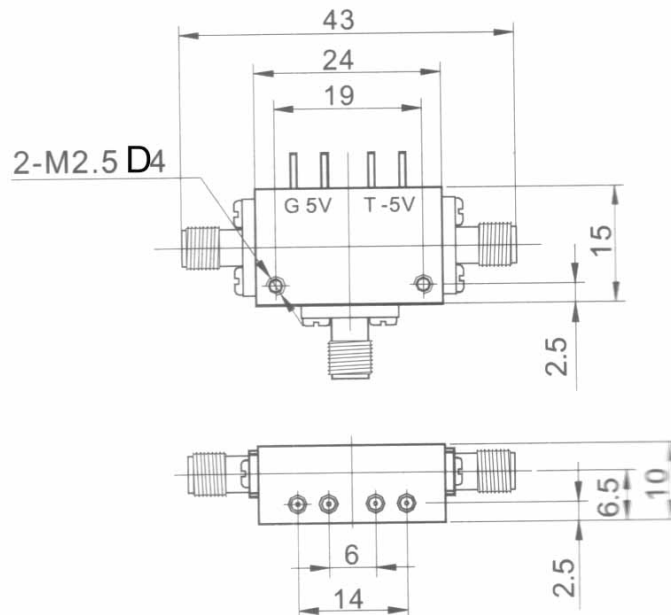

For current data sheets, please contact: sales@aacix.com