




Ellipse Lens (H60*V30°) Dip Package Outlines

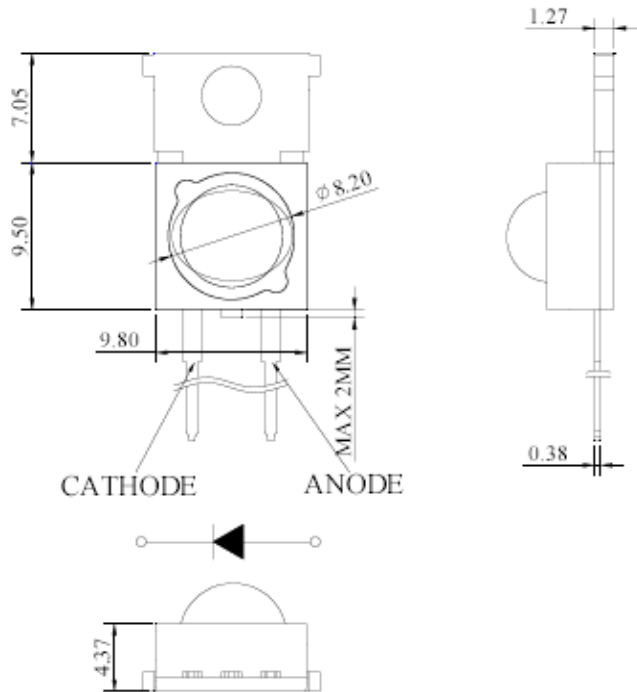

SELECTOR GUIDE

Part Number	Dice	Lens Color / Type	Pack Size	View Angle 2θ 1/2
MTHF1200-BL	Blue	Water Clear	1-Watt	60 ° x 30 °

ELECTRICAL / OPTICAL CHARACTERISTICS AT T_A=25°C


Parameter	Symbol	Device	Min.	Typ.	Max.	Units	Test Conditions
Forward Voltage	V _F	Blue	-	3.5	4.25	V	350mA
Reverse Current	I _R	Blue	-	-	50	µA	5V
Luminous Intensity	I _v	Blue	5.0	7.0	-	lm	350mA
Peak Wavelength	λ _{peak}	Blue	-	AVL UPON REQUEST	-	nm	350mA
Dominant Wavelength	λ _D	Blue	-	468	-	nm	350mA
Spectral Line Half-Width	Δλ _{1/2}	Blue	-	NA	-	nm	350mA

ABSOLUTE MAXIMUM RATINGS AT T_A=25°C


Parameter	Rating	Units
Forward Current (I _F)	350	mA
Power Dissipation (P _D)	-	mW
Reverse Voltage (V _R)	5	V
Operating Temperature (T _{OPR})	-40 ~ +75	°C
Storage Temperature (T _{STG})	-40 ~ +105	°C
Lead Solder Temperature (T _{SOL})	260 @ for 10 sec. max	

- All Dimensions Are In Millimeters (inches).
- Tolerance Is +0.25(0.01") Unless Otherwise Noted.
- Specifications Are Subject To Change Without Notice.


Typical Radiation Pattern for Ellipse Lens(201/2 : Horizontal 60°±10°*Vertical 30°±10°)

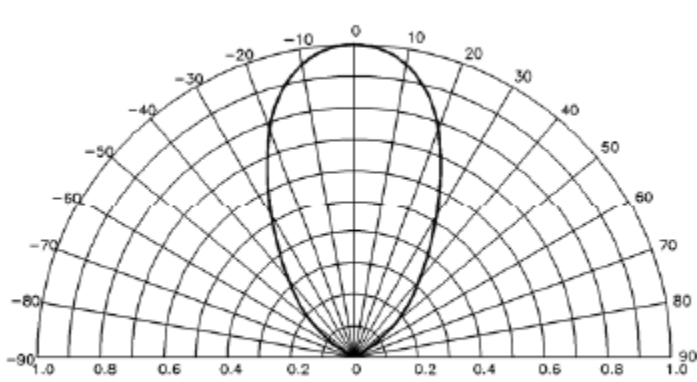


Horizontal 60°

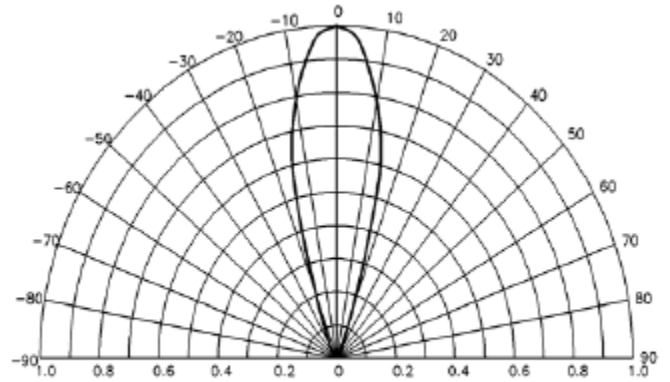


Vertical 30°

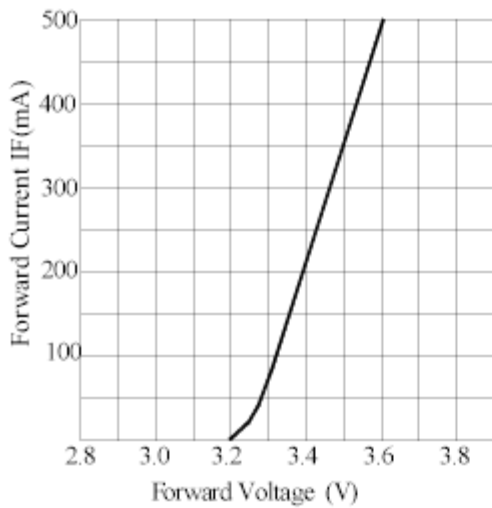


Forward Current VS. Applied Voltage

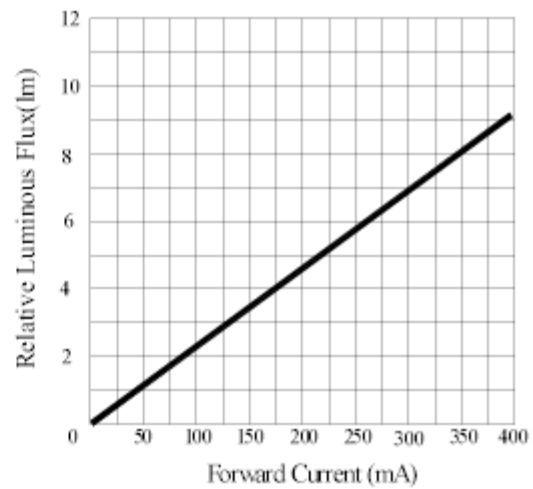

Forward Current VS. Luminous Intensity

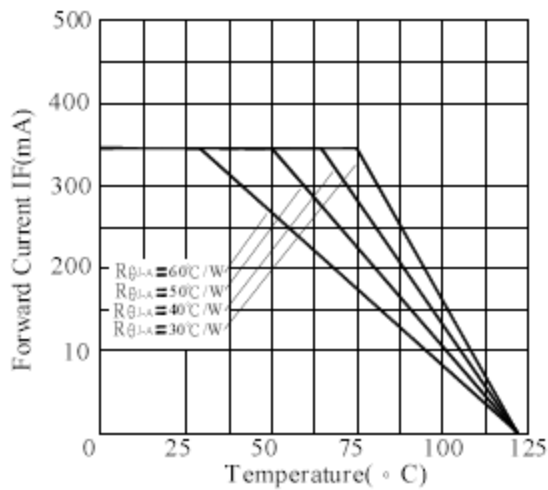

Ambient Temperature VS. Forward Current

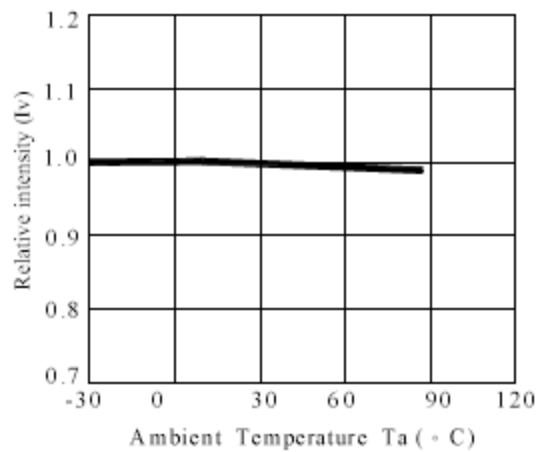

Relative intensity VS. Ambient Temperature

Wavelength Spectrum of Blue

