



1. Dimensions:

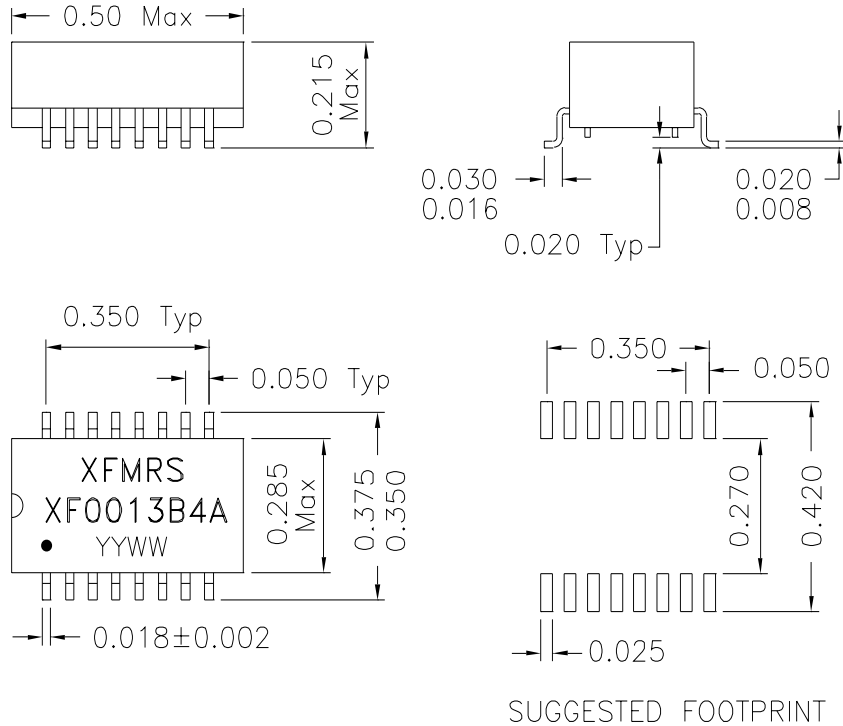

2. Schematic:

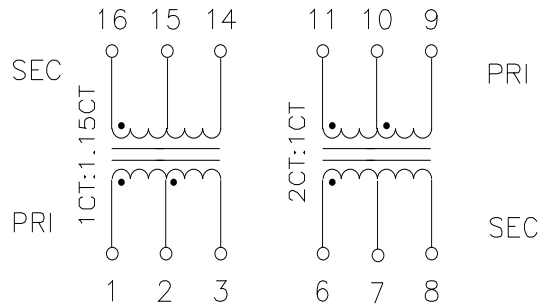

3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms

Turns Ratio: (1-2-3):(16-15-14)=1CT:1.15CT ±3%

Turns Ratio: (11-10-9):(6-7-8)=1CT:2CT ±3%

Pin 1-3 OCL: 1.2mH Typical @100KHz 50mV

Pin 11-9 OCL: 1.2mH Typical @100KHz 50mV

Cw/w: 35pF MAX. @100KHz 50mV (PRI/SEC)

PRI LL: 0.4uH MAX. @100KHz 50mV (SEC Shorted)

PRI DC Resistance: 0.70 Ohms MAX.

Pin 16-14 DC Resistance: 0.80 Ohms MAX.

Pin 6-8 DC Resistance: 1.20 Ohms MAX.

DOC. REV: A/1

XFMRS Inc	Title: TRANSFORMER	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF0013B4A REV. A
	DWN.	李清儿 Nov-11-99
	CHK.	Nov-11-99
SCALE 2.5:1 SHT 1 OF 1	APP.	Joe Huff Nov-11-99