



## PinnaClear™ HDMI Receiver

### Four-port HDMI Receiver with Mobile High-definition Link Support

The PinnaClear SiI9223 is a four-port HDMI receiver that delivers advanced HDMI 1.3 HDTV features including 1080p Deep Color and x.v.Color expanded color gamut. The SiI9223 supports Silicon Image's new Mobile High-Definition Link (MHL) technology and enables mobile devices such as digital cameras and camera phones to display high-definition content on digital televisions (DTVs).

The SiI9223 supports up to 36-bit color depth at 1080p/60Hz, 720p/120Hz and 1080i/120Hz resolutions and supports x.v.Color, which increases the number of colors by 1.8 times the RGB color space. The SiI9223 receiver also includes a receiver programming interface that significantly reduces the software overhead required to control the receivers.

The SiI9223 integrates extended display identification data (EDID), which is stored in embedded non-volatile memory (NVM) and loaded during power-up or initialization into four separate EDID RAMs. The four embedded EDIDs simplify the architecture, help reduce BOM cost and save board space.

Integrated consumer electronics control (CEC) hardware and API help reduce BOM cost and development time. The CEC I/O meets HDMI compliance tests and eliminates the need for additional external components. The CEC API manages reception and transmission of all CEC signals and significantly lowers system-level control by the system microcontroller, simplifying firmware overhead.


The SiI9223 consumes a minimal amount of power when in standby mode, with both CEC and EDID remaining fully operational. The standby power plane is isolated and can be powered locally from standby auxiliary power or one of the +5V signals from the HDMI cable. Additionally, only the +5V power from the source device is needed to read the EDID and the display can be completely unplugged from the AC power outlet.

The SiI9223 comes pre-programmed with HDCP keys. This set of keys simplifies the manufacturing process and lowers costs, while providing the highest level of HDCP key security.

The SiI9223 uses the latest generation of TMDS core technology, supporting dynamic cable equalization that will auto-detect the appropriate equalization required for the incoming signal, offering the best support for long cable connections. Silicon Image TMDS cores pass all HDMI compliance tests.

Silicon Image's Mobile High-Definition Link (MHL) technology enables mobile phones, digital cameras, portable media players and other mobile devices to connect directly to HDTVs. MHL enabled devices allow consumers to watch and listen to content on HDTVs with pristine digital quality. MHL technology provides a low-power, low-pin-count, HDMI-compatible solution for mobile devices.

### SiI9223 System Diagram

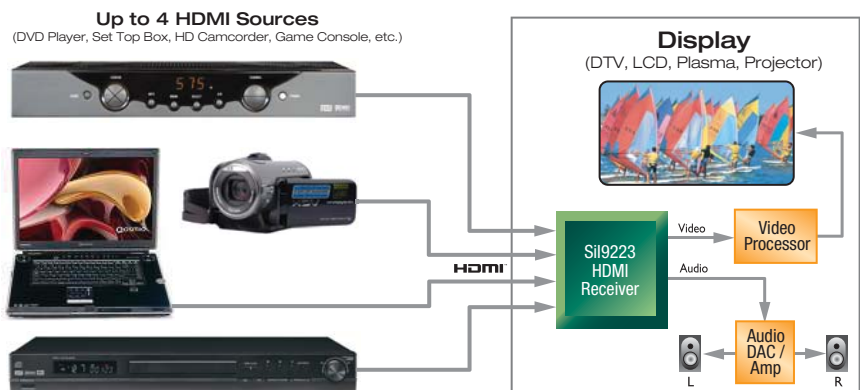

## SiI9223

### Applications

- LCD HDTV
- Plasma HDTV
- Front and rear projection HDTV

### Key Features

- Four HDMI 1.3 inputs
- Supports up to 36-bit color depth at 1080p/60Hz
- Mobile HD Link ready
- Built-in Consumer Electronics Control with CEC - API
- Four EDIDs for the four HDMI ports



# Sil9223 Features

## Sil9223 Starter Kit (CP9223HDMI)

Contents include:

### Hardware

- Sil9223 HDMI 1.3 receiver daughter board
- Sil9134 HDMI 1.3 transmitter daughter board
- Motherboard
- HDMI to HDMI cable
- AC power supply

### Software

- Windows debug software tool

### Documentation

- User's guide
- Schematics
- Bill of materials (BOM)



### Industry-Standard Compliance

- HDMI 1.3
- EIA/CEA-861D
- DVI 1.0
- HDCP 1.1

### Digital Video Input/Output

- 4 HDMI 1.3 ports with MHL support
- Supports DTV resolutions up to 1080p @ 60Hz or 720p/1080i @ 120Hz with 36-bit color depth
- Flexible digital video interface:
  - 24/30/36-bit RGB/YCbCr 4:4:4
  - 16/20/24-bit YCbCr 4:2:2
  - 8/10/12-bit YCbCr 4:2:2 (ITU-R BT.656)
- Integrated x.v.Color and RGB color space converter for both RGB-to-YCbCr and YCbCr-to-RGB (both 601 and 709) with true 12-bit accurate data using 14-bit processing
- 4:2:2 to 4:4:4 converter with 12-bit accurate data using 14-bit processing

### Digital Audio Input/Output

- I<sup>2</sup>S audio output with one data signal for stereo formats
- S/PDIF output supports PCM, Dolby Digital, DTS digital audio transmission (32-192 kHz Fs sample rate)
- IEC60958 or IEC61937 compatible
- Flexible, programmable I2S channel mapping
- 2:1 and 4:1 down-sampling to handle 96 kHz and 192 kHz audio streams.
- Intelligent audio mute capabilities avoids pops and noise
- Automatic soft mute and soft un-mute

### HDCP

- Integrated HDCP decryption engine for receiving protected audio and video content:
- Pre-programmed HDCP keys provide highest level of security and simplify manufacturing
- Built in HDCP BIST

### HDMI Receiver Programming Interface

- Minimal software overhead to control device
- Automatic Video and Audio Control
- Automatic mute and un-mute of audio
- Default values can be loaded from NVM after reset to operate without microcontroller

### Built-in Consumer Electronics Control

- HDMI-compliant CEC I/O simplifies design and lowers cost
- Integrated CEC Programming Interface (CPI) lowers software overhead
- Automatic Feature Abort response for unsupported commands
- Automatic message retry on transmit
- Integrated EDID in non-volatile memory
- Optional registers to override EDIDs

### Power Management

- Flexible power management
- Separate Standby power pin
- Standby power can be obtained locally or from HDMI +5V signal
- Extremely low standby power

### Package

- 20mm x 20mm 144-pin TQFP with ePad



**Silicon Image, Inc.**

1060 E. Arques Avenue  
Sunnyvale, CA 94085

T 408.616.4000

F 408.830.9530

[www.siliconimage.com](http://www.siliconimage.com)

**Simply** Stored. Connected. Beautiful.

Copyright © 2008 Silicon Image, Inc. All rights reserved. Silicon Image, the Silicon Image logo, Sil9223, PinnaClear, and the PinnaClear logo are trademarks or registered trademarks of Silicon Image, Inc. in the United States and/or other countries. HDMI, the HDMI logo, High-Definition Multimedia Interface, are trademarks or registered trademarks in the United States and/or other countries and are used under license from HDMI Licensing, LLC. All other trademarks are the property of their respective owner in the United States and/or other countries. Product specifications are subject to change without notice.