



LTR	REVISION	DATE	APPD
-	RELEASED	08-03-07	MM

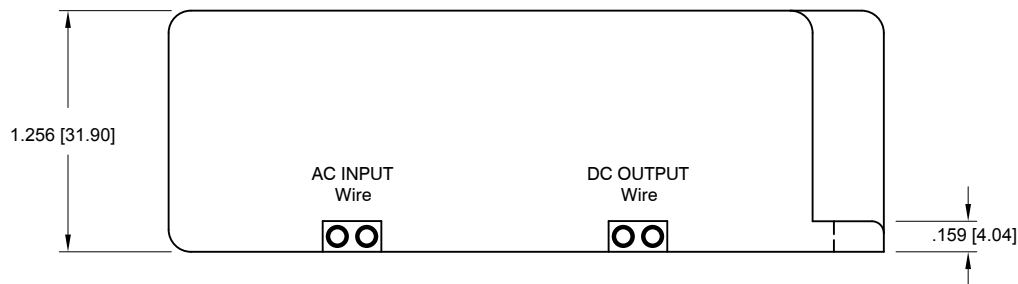

SPECIFICATIONS

- AC INPUT: 90~264Vac/0.5A/47~63Hz.
- INPUT INRUSH CURRENT: <10A/115Vac, <20A/230Vac
- POWER FACTOR: Max. >0.92 AT FULL LOAD, 115Vac, 230Vac
- CURRENT CREST FACTOR: 1.5 MAX
- TOTAL HARMONIC DISTORTION: 20% MAX
- EFFICIENCY: 85% Typical
- PROTECTION: OCP, OVP, SCP-Auto Recovery.
- OPERATION TEMP: -30°C~+60°C, Tc:90°C
- STORAGE TEMP: -40°C~+85°C.
- MTBF (@25°C): >100,000 Hours. MIL-217F.
- SAFETY: UL1310 CLASS 2, UL48, cUL
- WEIGHT: 370 GRAMS TYPICAL

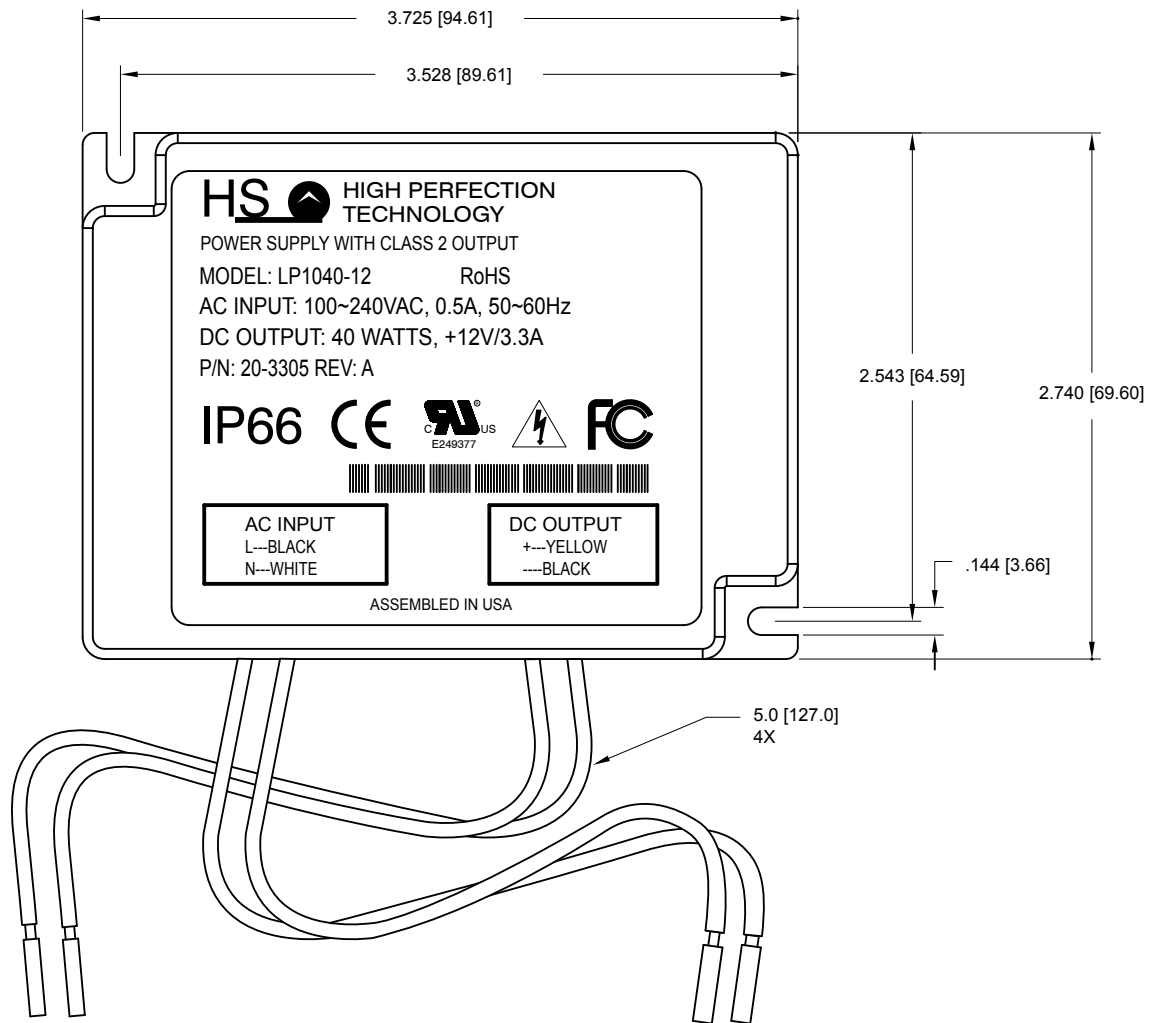

PWR-12VCV-3.33A-PF	7-12V	3.3±5%	40W
LEDTRONICS PART NO.	DC OUTPUT VOLTAGE	DC OUTPUT CURRENT (A)	WATTS MAX.
ELECTRICAL TEST			

 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC.™ It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.™		TITLE PWR-12VCV-3.33A-PF					
	XXX ± .010 .XX ± .025 ANGLES ± 0°, 30' FRACT. ± 1/32		TOLERANCE PER ANSI-Y14.5 (UNLESS OTHERWISE STATED)		DWG NO CMMS0384	SCALE 1:1	SHEET 1 OF 1	DATE 08-03-07
	CODE IDENT NO. 8Z410	DWG BY MM	CHK BY PL 08-15-07	QA JCH 08-09-07	MNFG	CUSTOMER		