



DC COMPONENTS CO., LTD.
RECTIFIER SPECIALISTS

**MMB3505
THRU
MMB3510**

TECHNICAL SPECIFICATIONS OF SINGLE-PHASE SILICON BRIDGE RECTIFIER
VOLTAGE RANGE - 50 to 1000 Volts **CURRENT - 35 Amperes**

FEATURES

- * Metal case for Maximum Heat Dissipation
- * Diffused Junction
- * High current capability
- * Surge overload ratings - 400 Amperes
- * Low forward voltage drop
- * High Reliability

MECHANICAL DATA


- * Case: Metal case, electrically isolated
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Plated .25"(6.35mm) Faston lugs, Solderable per MIL-STD-202E, Method 208 guaranteed
- * Polarity: As marked
- * Mounting position: Any
- * Weight: 25 grams approx.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.



MMB-25

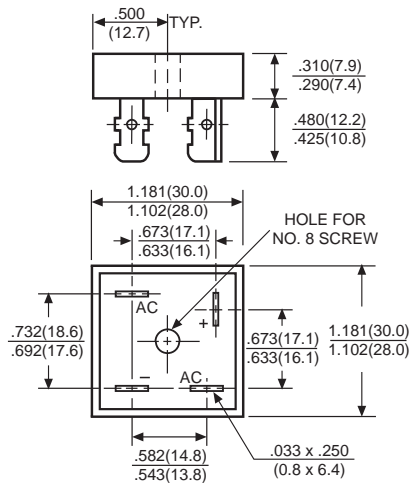

Dimensions in inches and (millimeters)

	SYMBOL	MMB3505	MMB351	MMB352	MMB354	MMB356	MMB358	MMB3510	UNITS	
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volts	
Maximum RMS Bridge Input Voltage	VRMS	35	70	140	280	420	560	700	Volts	
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	Volts	
Maximum Average Forward Rectified Output Current at Tc = 55°C	Io	35							Amps	
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	400							Amps	
Maximum Forward Voltage Drop per element at 17.5A DC	Vf	1.1							Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	Ir	@ TA = 25°C	10							μAmps
		@ TA = 100°C	500							
I ² t Rating for Fusing (t<8.3ms)	I ² t	664							A ² Sec	
Typical Junction Capacitance (Note1)	Cj	300							pF	
Typical Thermal Resistance (Note 2)	RθJC	2.2							°C/W	
Operating and Storage Temperature Range	Tj,Tstg	-55 to +150							°C	

NOTES : 1.Measured at 1 MHz and applied reverse voltage of 4.0 volts.
2.Thermal Resistance from Junction to Case per leg.

RATING AND CHARACTERISTIC CURVES (MMB3505 THRU MMB3510)

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

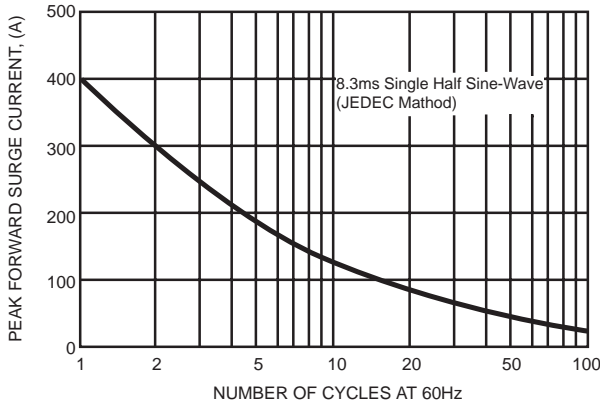


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

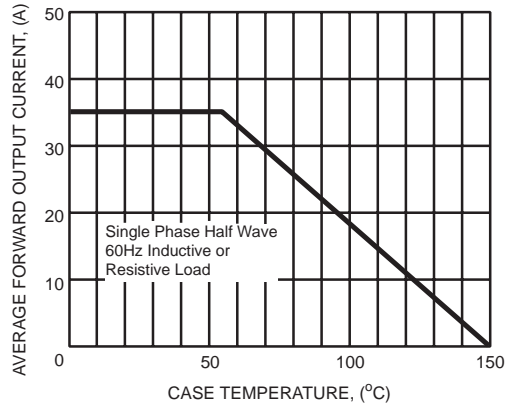


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

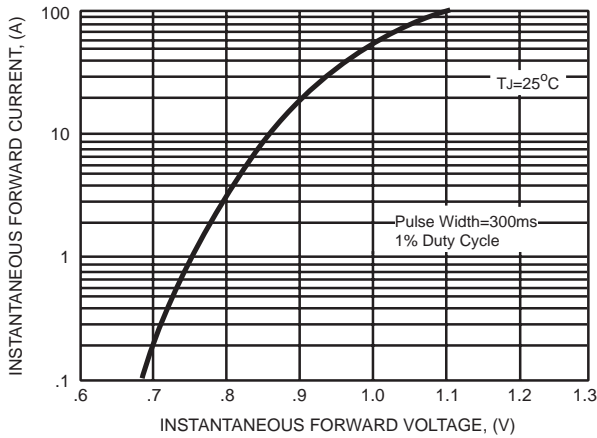


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

