



Excellence in Electronics

**TYPE
CK1038**

The CK1038 is a corona discharge voltage regulator tube of subminiature construction designed for 900 volt operation and a current range of 5 to 55 microamperes. The flexible terminal leads may be soldered or welded directly to the terminals of circuit components without the use of sockets. Standard subminiature sockets may be used by cutting the leads to 0.20" length.

MECHANICAL DATA

ENVELOPE: T-3 Glass

BASE: None (0.016" tinned flexible leads. Length: 1.50"
Spacing: 0.10" center-to-center)

TERMINAL CONNECTIONS:

Lead 1 Cathode Lead 5 Cathode
Lead 3 Anode

ELECTRICAL DATA

DESIGN CENTER MAXIMUM RATINGS:



Regulator Current
Temperature Range

CHARACTERISTICS AND TYPICAL OPERATION:

DC Starting Voltage (approx.)
Operating Current Range
Operating Voltage Range at 25 μ a.
Operating Voltage at 5 μ a.
Operating Voltage at 55 μ a.
Life
Regulation

125 μ a.
-55 to +70 $^{\circ}$ C

930 volts
5 to 55 μ a.
885 to 915 volts D.C.
880 volts min.
925 volts max.
500 hrs. min.
15 volts max.

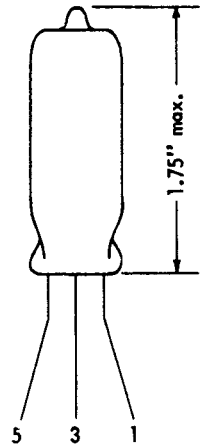

www.DataSheet4U.com

Tentative Data

RAYTHEON MANUFACTURING COMPANY

RECEIVING AND CATHODE RAY TUBE OPERATIONS

www.DataSheet4U.com