P/N: S5778A DATA SHEET

Feature

- This standard series of 6 pin DIL Line interface Modules to meet the isolation and impedance matching requirements for T1,E1,CEPT and PRI ISDN applications.
- Operating temperature of :0℃ to +70℃
- Storage temperature range: -25℃to +125℃.

Electrical Specifications @ 25°C				
Part Number	Turns Ratio (±2%)	OCL (mH Min)	L.L (uH Max)	$C_{W/W}$ (Max pF)
S5778A	1CT:1	1.2	0.8	25

Continue			
Part Number	DCR(Ω Max) PRI/SEC	PRI PINS	HI-POT (Vrms)
S5778A	0.7	1-5	1500

Schematic

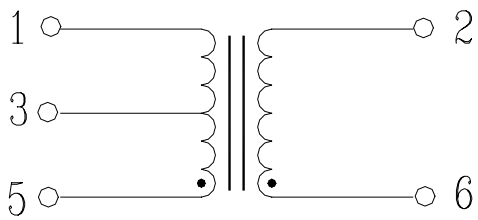

www.DataSheet4U.com

Mechanical

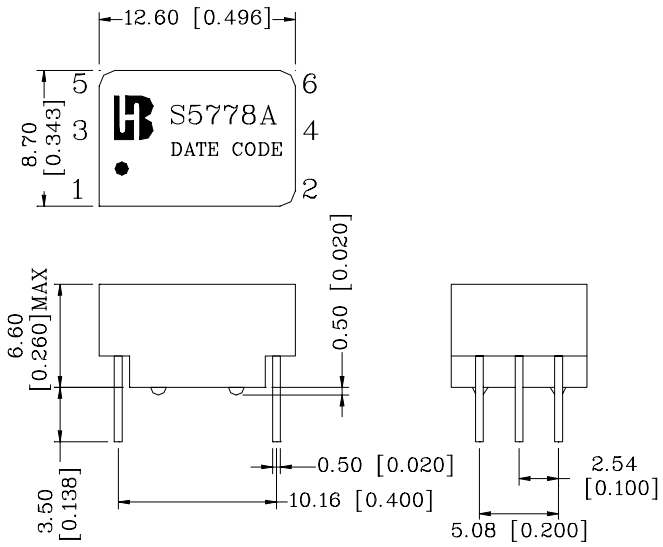

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]

www.DataSheet4U.com

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434