
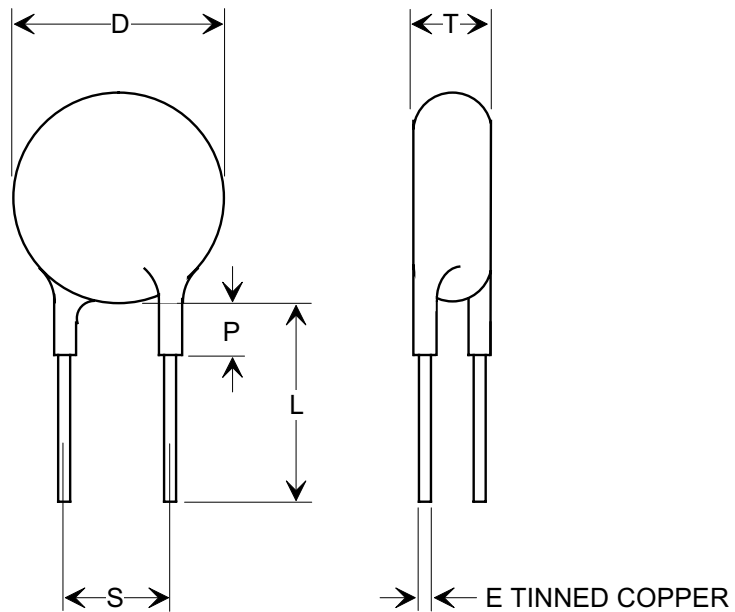



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
 DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



SPECIFICATIONS

TUSONIX STYLE:	847-000	
D (Diameter):	.675 [17.15] MAX.	
T (Thickness):	.218 [5.54] MAX.	
S (Lead Wire Spacing):	.375 ±.031 [9.52 ±0.79]	
L (Lead Wire Length):	1.25 [31.75] MIN.	
E (Lead Wire Diameter):	22 AWG, (.025 [0.64])	
P (Coating on Leads Max.):	.125 [3.17]	
Capacitance Value:	50,000 pF	
Capacitance Tolerance:	±20%	
Temperature Coefficient:	Z5V	
Voltage:	Working:	500 VDC
	Test:	1500 VDC
	Life:	750 VDC
Marking:	STAMP: TMK, CAP, TOL, T.C.	

CONFORMAL COATING:
 PHENOLIC RESIN, WAX IMPREGNATED.

REVISION RECORD Original Release C.O. 2005-0126-1-01	0	--TOLERANCES-- Unless Otherwise Specified	Title DUAL DISC	
		DECIMAL ±	Drawn S.M. 01-26-05	
		ANGLES ±	Approved T.C. 01-26-05	
		TUSONIX TUCSON, ARIZONA	A	847-000-Z5V0-503M