


1 Amp Low Dropout Positive Voltage Regulator


The PJ1117 Series of high performance positive voltage regulators are designed for use in applications requiring low dropout performance at full rated current. Additionally, the PJ1117 Series provides excellent regulation over variations due to changes in line, load and temperature. Outstanding features include low dropout performance at rated current, fast transient response. The PJ1117 Series are three terminal regulators with fixed and adjustable voltage options available in popular packages.

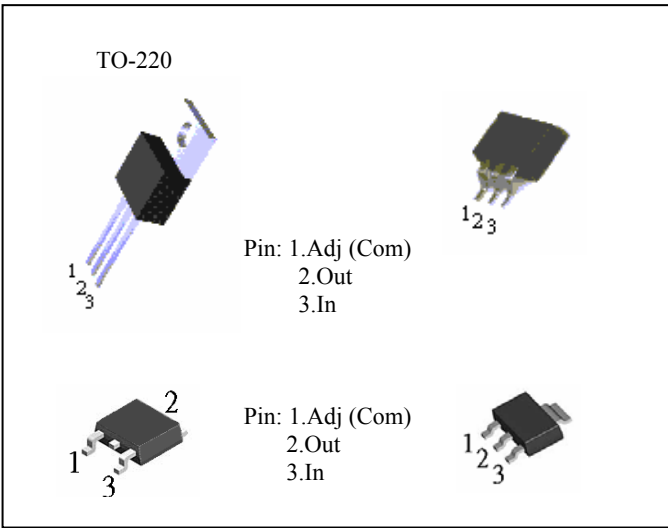

FEATURES

- Low dropout voltage 1.3 V max.
- Full current rating over line and temperature
- Fast transient response
- $\pm 2\%$ Total output regulation over line, load and temperature
- Adjust pin current max 120 μ A over temperature
- Line regulation typical 0.015%.
- Load regulation typical 0.05%.
- Fixed/adjustable output voltage
- TO-220, TO-263, TO-252& SOT-223 package

BLOCK DIAGRAM

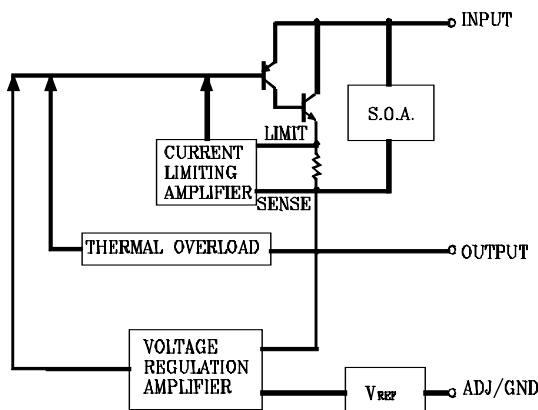

ORDERING INFORMATION

| Device | Operating Temperature (Ambient) | Package |
|--|---------------------------------|---------|
| PJ1117CZ-adj / 1.8V PJ1117CZ-2.5V / 2.85V PJ1117CZ-3.3V PJ1117CZ-5.0V | -20 to +85°C | TO-220 |
| PJ1117CM-adj / 1.8V PJ1117CM-2.5V / 2.85V PJ1117CM-3.3V PJ1117CM-5.0V | | TO-263 |
| PJ1117CW-adj / 1.8V PJ1117CW-2.5V/2.85V PJ1117CW-3.3V PJ1117CW-5.0V | | SOT-223 |
| PJ1117CP-adj / 1.8V PJ1117CP-2.5V/2.85V PJ1117CP-3.3V PJ1117CP-5.0V | | TO-252 |

NOTE: Contact factory for additional voltage option.

ABSOLUTE MAXIMUM RATING

| Parameter | Symbol | Maximum | Units |
|--|---------------|--------------------|--------|
| Input Voltage | V_{IN} | 7 | V |
| Power Dissipation | P_D | Internally Limited | W |
| Thermal Resistance Junction to Case | θ_{JC} | 2.5 | °C / W |
| Thermal Resistance Junction to Ambient | θ_{JA} | 50 | |
| Operating Junction Temperature Range | T_J | 0 to +125 | °C |
| Operating Ambient Temperature Range | T_A | -20 to +85 | |
| Storage Temperature Range | T_{STG} | -25 to 150 | |
| Lead Temperature (Soldering) 10 Sec. | T_{LEAD} | 260 | |

1 Amp Low Dropout Positive Voltage Regulator

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, Adjust $V_{IN} = 2.75V$ to $12V$ and Adjust $I_o = 10mA$ to $1.0A$

Fixed $V_{IN} = 4.75V$ to $12V$ and Fixed $I_o = 10mA$ to $1.0A$

(For Fixed 5.0V Output Version, $V_{IN} = 7.5V$ to $12V$)

| Parameter | Symbol | Test Conditions | | | Test Limits | | | Units |
|---|------------------|--------------------|-------|-------------|---------------------|-------|---------------------|-----------------|
| | | $V_{IN} - V_{OUT}$ | I_o | $T_J^{(4)}$ | Min | Typ | Max | |
| Output Voltage ⁽¹⁾ | V_o | 5V | 10mA | 25 | 0.99 V _o | V_o | 1.01 V _o | V |
| Fixed Voltage | | | | Over Temp. | 0.98 V _o | | 1.02 V _o | |
| Reference Voltage ⁽¹⁾ | V_{REF} | 5V | 10mA | 25 | 1.238 | 1.250 | 1.262 | |
| Adj Voltage | | | | Over Temp. | 1.225 | | 1.275 | |
| Line Regulation ⁽¹⁾ ($V_{in} - V_{out} = 3V$) | $REG_{(LINE)}$ | | 10mA | 25 | | 0.015 | 0.2 | % |
| | | | | Over Temp. | | 0.035 | | |
| Load Regulation ⁽¹⁾ ($V_{in} - V_{out} = 3V$) | $REG_{(LOAD)}$ | | | 25 | | 0.05 | 0.3 | |
| | | | | Over Temp. | | 0.2 | 0.4 | |
| Dropout Voltage $\Delta V_{REF} = 1\%$ | V_D | | | 25 | | 1 | | V |
| | | | | | | 1.1 | 1.3 | |
| Current Limit ($V_{in} - V_{out} = 5V$) | I_{cL} | | | | 1.0 | 1.1 | | A |
| Quiescent Current Fixed Model | I_Q | 5V | | | | 12 | 14 | mA |
| Temperature Coefficient | T_c | | | | | 0.005 | | %/°C |
| Adjust Pin Current | I_{ADJ} | | | 25 | | 55 | | μA |
| | | | | | | | 120 | |
| Adjust Pin Current Change | ΔI_{ADJ} | | | | | 0.2 | 5 | |
| Temperature Stability | T_s | 5V | 500mA | Over Temp. | | 0.5 | | % |
| Minimum Load Current Adjust Model | I_o | 5V | | | | 5 | 10 | mA |
| RMS Output Noise ⁽²⁾ | V_N | | | 25 | | 0.003 | | %V _o |
| Ripple Rejection Ratio ⁽³⁾ | R_A | 5V | 1.0A | Over Temp. | 60 | 72 | | dB |

(1)Low duty cycle pulse testing with Kelvin connections required.

(2)Bandwidth of 10Hz to 10KHz.


(3)120Hz input ripple (C_{ADJ} for ADJ)=25 μF .

(4)Over Temp.-over specified operating junction temperature range.

1 Amp Low Dropout Positive Voltage Regulator


Typical Application Circuit

FIXED VOLTAGE REGULATOR (1)(2)

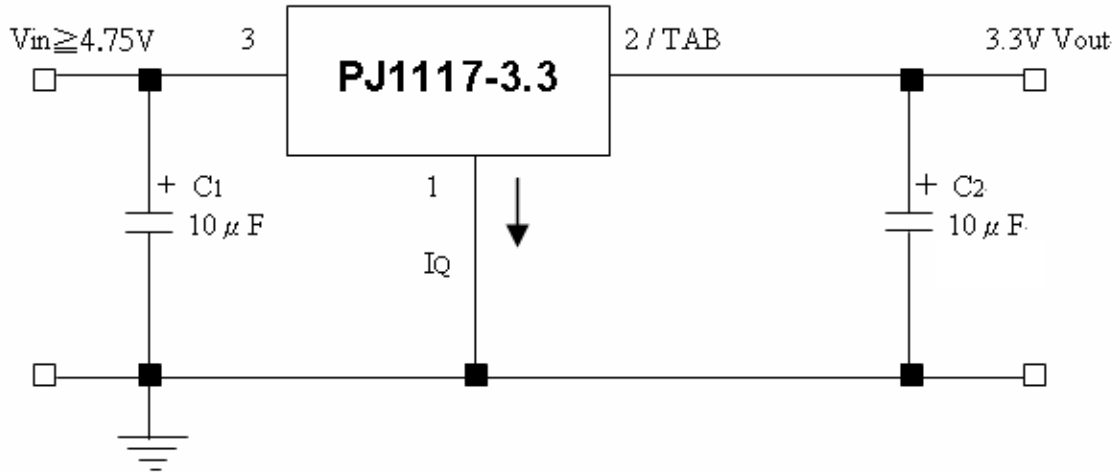

(1) C1 NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS

ADJUSTABLE VOLTAGE REGULATOR (1)(2)

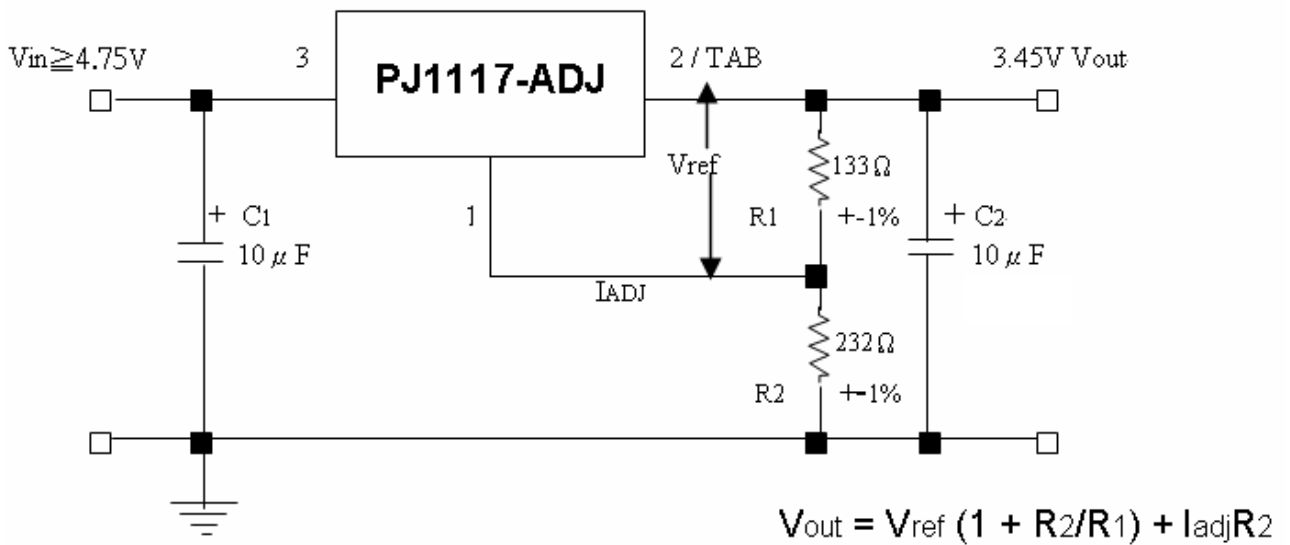

(1) C1 NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS

(2) C2 REQUIRED FOR STABILITY

1 Amp Low Dropout Positive Voltage Regulator

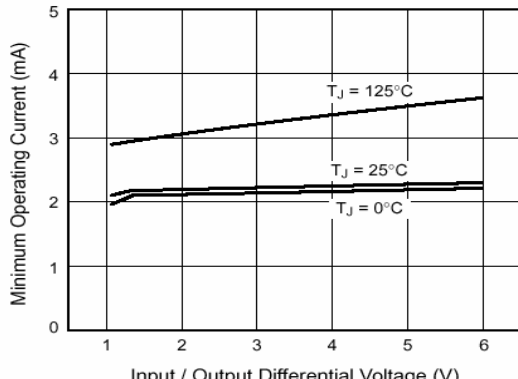


Fig. 1 – Minimum Load Current (Adjustable Version)

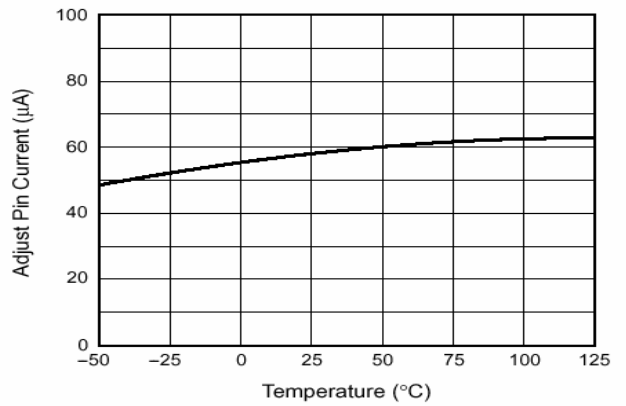


Fig. 2 – Adjust Pin Current

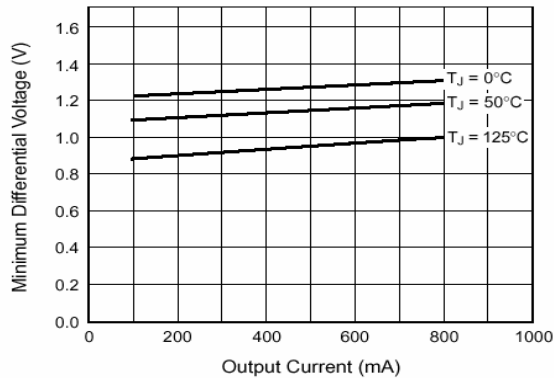


Fig. 3 – Dropout Voltage

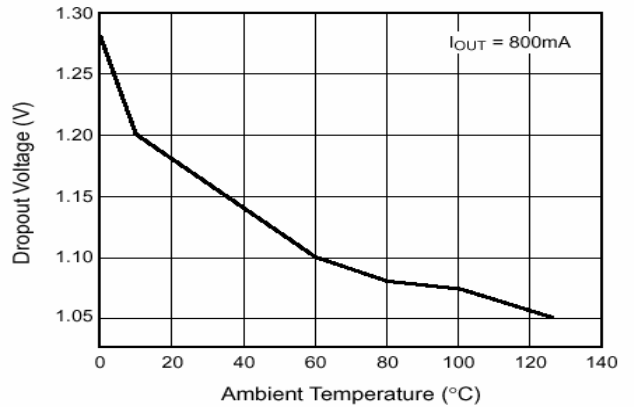


Fig. 4 – Dropout Voltage v.s. Temperature

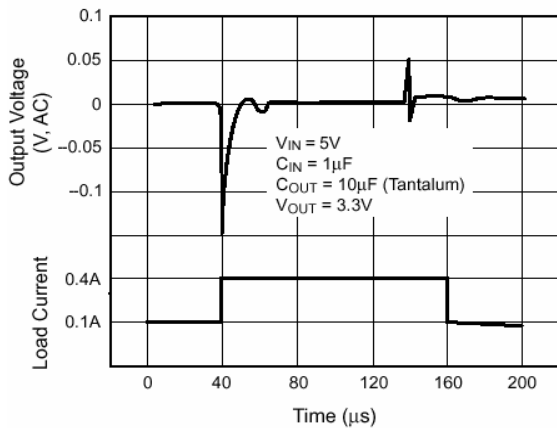


Fig. 5 – Load Transient Response

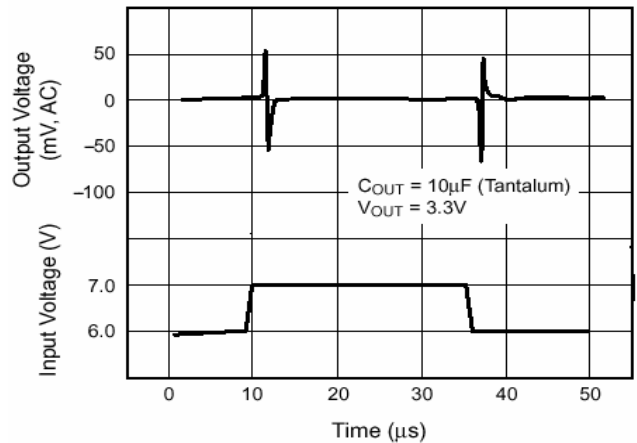


Fig. 6 – Line Transient Response

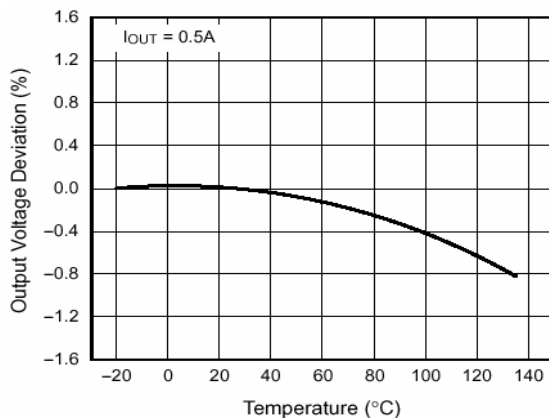


Fig. 7 – Temperature Stability


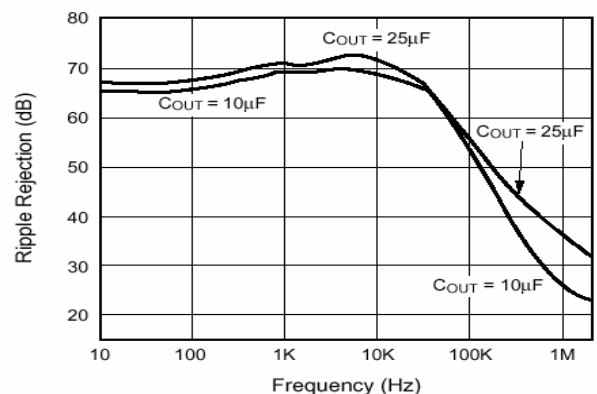


Fig. 8 – Ripple Rejection (with $C_{adj} = 25\mu\text{F}$)

1 Amp Low Dropout Positive Voltage Regulator

TO-220 Mechanical drawing


TO-220 Unit:mm

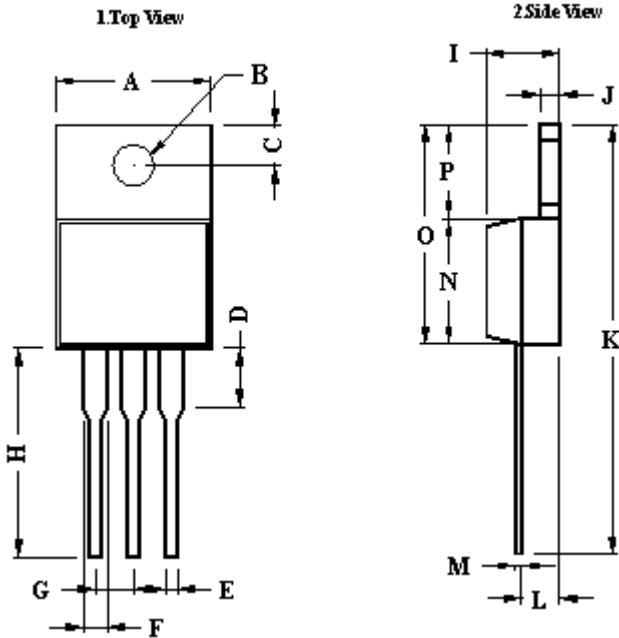

| DIM | TO-220 DIMENSION | | | |
|-----|------------------|-------|--------|-------|
| | MILLIMETERS | | INCHES | |
| | MIN | MAX | MIN | MAX |
| A | 10.00 | 10.50 | 0.394 | 0.413 |
| B | 3.24 | 4.44 | 0.128 | 0.175 |
| C | 2.44 | 2.94 | 0.096 | 0.116 |
| D | 3.565 | 4.315 | 0.140 | 0.170 |
| E | 0.68 | 0.92 | 0.027 | 0.036 |
| F | 1.115 | 1.485 | 0.044 | 0.058 |
| G | 2.345 | 2.715 | 0.092 | 0.107 |
| H | 13.49 | 14.31 | 0.531 | 0.563 |
| I | 4.475 | 5.225 | 0.176 | 0.206 |
| J | 1.15 | 1.39 | 0.045 | 0.055 |
| K | 27.78 | 29.62 | 1.094 | 1.166 |
| L | 2.175 | 2.925 | 0.086 | 0.115 |
| M | 0.297 | 0.477 | 0.012 | 0.019 |
| N | 8.28 | 8.80 | 0.326 | 0.346 |
| O | 14.29 | 15.31 | 0.563 | 0.603 |
| P | 6.01 | 6.51 | 0.237 | 0.256 |

TO-263 Mechanical drawing

TO-263 Unit:mm

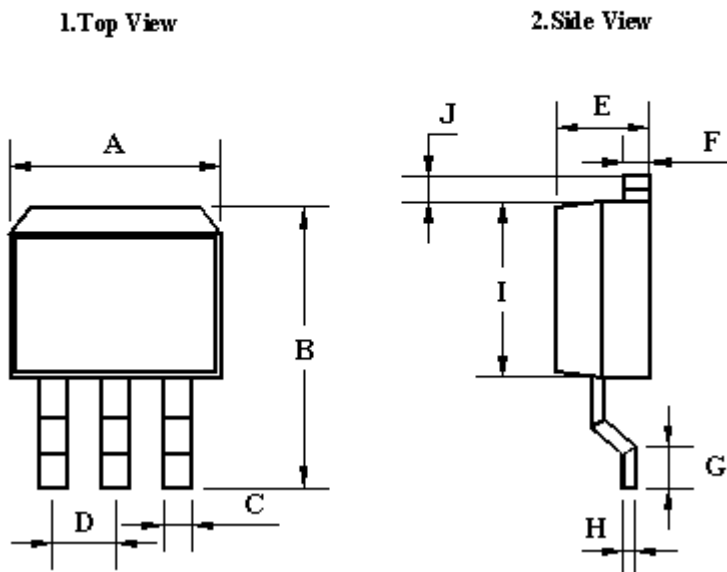


| DIM | TO-263 DIMENSION | | | |
|-----|------------------|-------|--------|-------|
| | MILLIMETERS | | INCHES | |
| | MIN | MAX | MIN | MAX |
| A | 10.00 | 10.50 | 0.394 | 0.413 |
| B | 14.60 | 15.87 | 0.575 | 0.625 |
| C | 0.68 | 0.92 | 0.027 | 0.036 |
| D | 2.42 | 2.66 | 0.095 | 0.105 |
| E | 4.31 | 4.83 | 0.170 | 0.190 |
| F | 1.14 | 1.40 | 0.045 | 0.055 |
| G | 2.28 | 2.79 | 0.090 | 0.110 |
| H | 0.45 | 0.73 | 0.018 | 0.029 |
| I | 8.28 | 8.80 | 0.326 | 0.346 |
| J | 1.14 | 1.4 | 0.045 | 0.055 |

1 Amp Low Dropout Positive Voltage Regulator


TO-252 Mechanical drawing

TO-252 Unit:mm

1.Top View

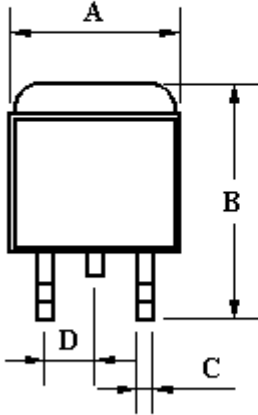

2.Side View

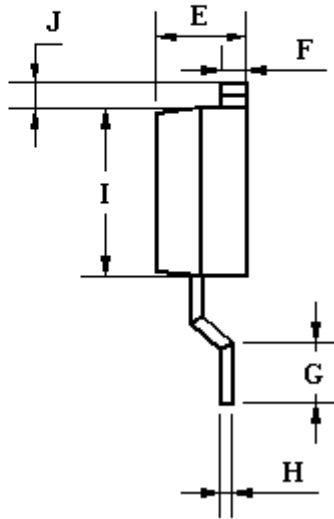


| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|--------|-------|
| | MIN | MAX | MIN | MAX |
| A | 6.57 | 6.84 | 0.259 | 0.269 |
| B | 9.25 | 10.40 | 0.364 | 0.409 |
| C | 0.62 | 0.76 | 0.024 | 0.030 |
| D | 2.56 | 2.67 | 0.101 | 0.105 |
| E | 2.30 | 2.39 | 0.090 | 0.094 |
| F | 0.49 | 0.57 | 0.019 | 0.022 |
| G | 1.46 | 1.58 | 0.057 | 0.062 |
| H | 0.52 | 0.57 | 0.020 | 0.022 |
| I | 5.34 | 5.55 | 0.210 | 0.219 |
| J | 1.46 | 1.64 | 0.057 | 0.065 |


SOT-223 Mechanical drawing

SOT-223 Unit:mm

1.Top View

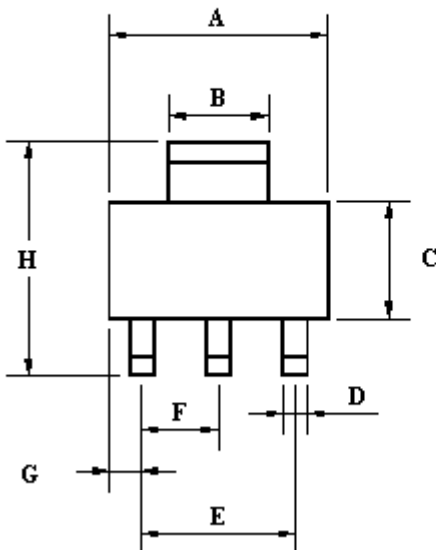

2.Side View



| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|--------|-------|
| | MIN | MAX | MIN | MAX |
| A | 6.30 | 6.80 | 0.248 | 0.268 |
| B | 2.9 | 3.1 | 0.114 | 0.122 |
| C | 3.3 | 3.7 | 0.130 | 0.146 |
| D | 0.63 | 0.83 | 0.025 | 0.033 |
| E | 4.60 | 4.60 | 0.181 | 0.181 |
| F | 2.30 | 2.30 | 0.091 | 0.091 |
| G | 0.835 | 1.035 | 0.033 | 0.041 |
| H | 6.7 | 7.3 | 0.264 | 0.287 |
| I | 0.255 | 0.355 | 0.010 | 0.014 |
| J | 16° | 16° | 16° | 16° |
| K | 1.55 | 1.80 | 0.061 | 0.070 |
| L | 10° | 10° | 10° | 10° |