

TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

PRODUCTION TESTS

URNS RATIO = 100%

DC RESISTANCE IN OHMS	1-2 = 3-4 = 765 TO 930
	5-6 = 7-8 = 36 TO 44

MAX EXCITATION CURRENT = .012 A
 APPLY = 230V 60HZ, 1-4 (TIE 2+3)

OPEN CIRCUIT VOLTAGE
 EACH PRI = 114.5 TO 115.5 V
 EACH SEC = 23 TO 24 V





HIPOT = 2000V PRI'S TO SEC'S
 2000V PRI'S, SEC'S TO CORE
 500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS
 PINS TO FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

FP34-75.DC2

EIA-17-YYWW
 XXX B10

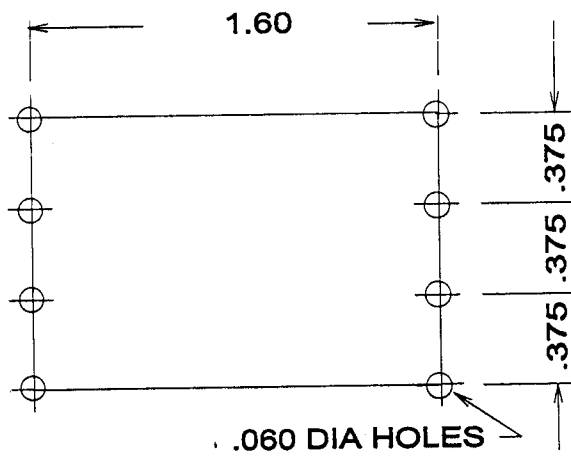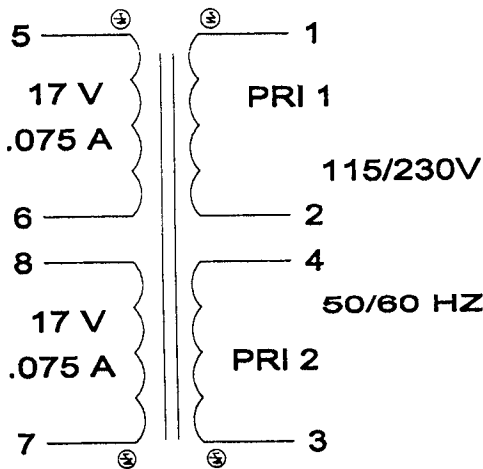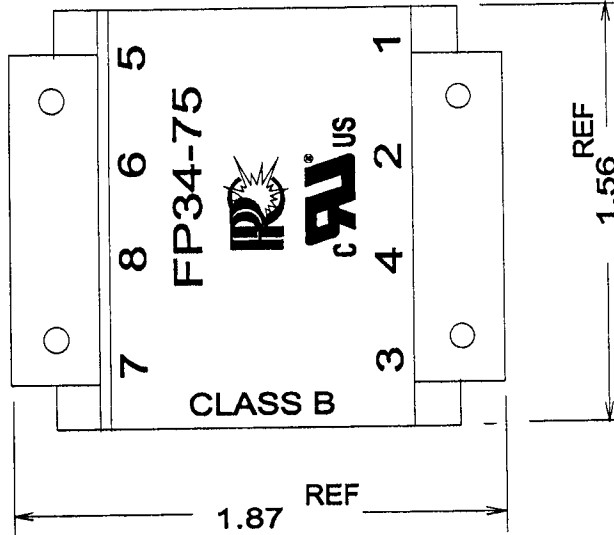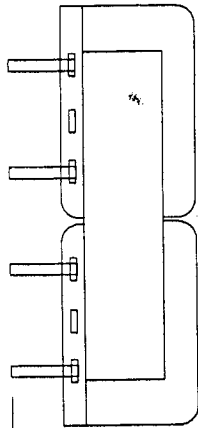

METHOD 1 X 1

MARKING ON PRINTED WRAPPER
 DATE & SITE CODE ON DECAL

PART NO.: FP34-75