

TENTATIVE


CMOS AREA IMAGE SENSOR

**TCM5003D****1/4 INCH 330k PIXEL CMOS COLOR IMAGE SENSOR**

The TCM5003D is a CMOS color image sensor that meets with VGA format. It enables all pixel signals to be output in sequence each 1/30 s. (progressive scanning)

This element is equipped with 494 vertical and 659 horizontal signal pixels, and the image size meets with 1/4 inch optical format.

Use of the CMOS process enables low power-consumption operations with a single power voltage driving. It also provides excellent color reproduction through its primary color filter, and it is perfect for use as an image input device for digital still cameras, PC cameras and other forms of multi-media.

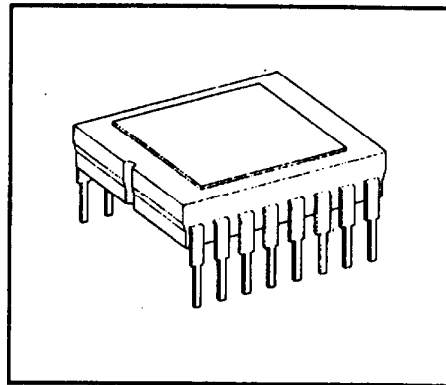

Weight : 1.9g (Typ.)

**FEATURES**

- Optical size : 1/4 inch optical format
- Total pixel numbers : 692 (H) × 504 (V)
- Signal pixel numbers : 659 (H) × 494 (V)
- Pixel pitch : 5.6 μm (H) × 5.6 μm (V) (square pixel)
- Image size : 3.6mm (H) × 2.7mm (V)
- Package : 16-pin DIP, cerdip
- Color filter : Primary color filter, Bayer arrangement (G check, R/B line in sequence)
- Frame frequency : 30Hz
- Power voltage : 3.3V
- Additional functions : Variable electronic shutter (1/30 to 1/8000 s)  
Monitoring operation (each next horizontal line)

980508EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.


**MAXIMUM RATINGS**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Supply Voltage	V <sub>DD</sub>	-0.5~4.2	V
Input Voltage	V <sub>IN</sub>	-0.5~V <sub>DD</sub> + 0.5	V
Input Protection Diode Current	I <sub>IN</sub>	±20	mA
Storage Temperature	T <sub>stg</sub>	-30~85	°C

**RECOMMENDED OPERATING CONDITIONS**


CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Supply Voltage	V <sub>AVDD</sub> V <sub>DVDD</sub>	3.0~3.6	V
Input Voltage	V <sub>IN</sub>	0~V <sub>DVDD</sub>	V
Operating Temperature	T <sub>opr</sub>	-20~60	°C

**PIN CONNECTION**

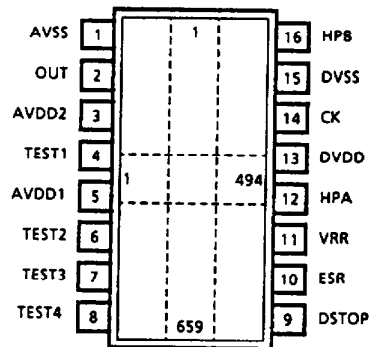

(TOP VIEW)

CIRCUIT DIAGRAM

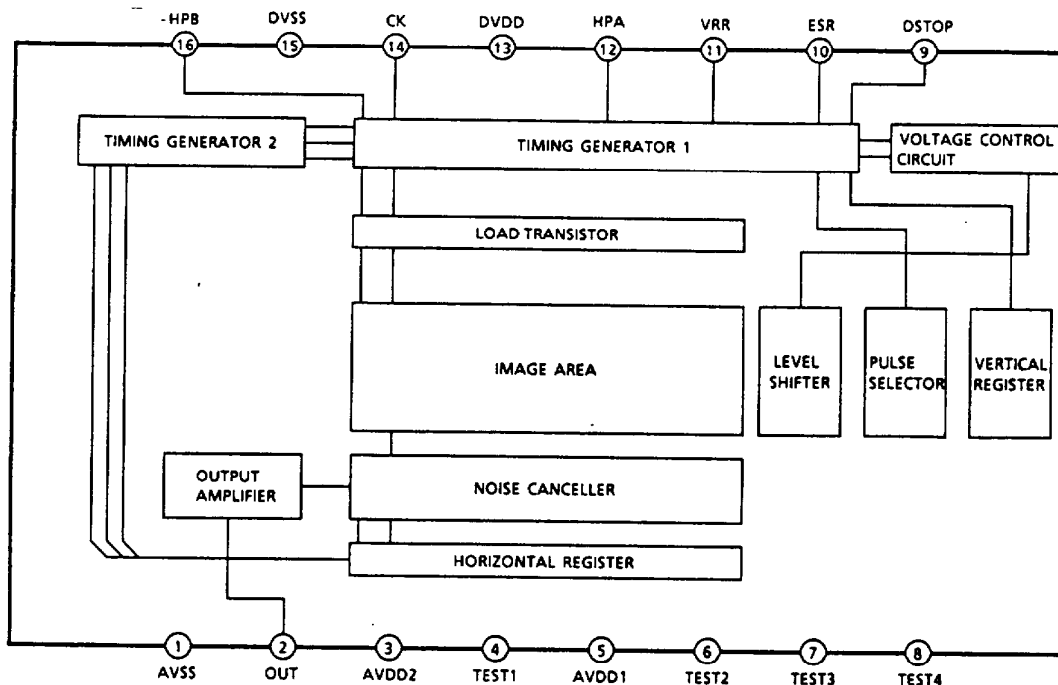

PIN FUNCTIONS

PIN No.	SYMBOL	I/O	FUNCTION
1	AVSS	—	Analog GND
2	OUT	O	Signal output
3	AVDD2	—	Analog power supply 2
4	TEST1	I	Test pin. Normally connected to GND through a capacitor (4.7~10 $\mu$ F)
5	AVDD1	—	Analog power supply 1
6	TEST2	I	Test pin 2. Normally connected to GND through a capacitor (4.7~10 $\mu$ F)
7	TEST3	I	Test pin 3. Normally connected to GND through a capacitor (4.7~10 $\mu$ F)
8	TEST4	—	Test pin 4. Normally H level inputs.
9	DSTOP	I	Operations suspension control pin. H: Normal operations, L: Operations suspended
10	ESR	I	Electrical shutter start pulse input
11	VRR	I	Vertical timing start pulse input
12	HPA	I	Horizontal timing start pulse input
13	DVDD	—	Digital power supply
14	CK	I	Clock pulse input. Double the frequency of signal output.
15	DVSS	—	Digital GND
16	HPB	I	Reading mode switching pin. L: Normal operations (1V = 525H, 30Hz), HPB pulse: Monitoring operations (each next horizontal line, 1V = 262.5H, 60Hz)


## OPTICAL AND ELECTRICAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Sensitivity (G)	R (G)	Standard conditions (*1) G output signal	300	400	—	mV
Saturation Voltage	VSAT		500	600	—	mV
Dark Signal Voltage	VDRK	Ta = 60°C, Dark condition	—	1.0	2.0	mV
Blooming Marjin	BLM	Standard light condition	500	—	—	times
S/N (dark)	S/N	Dark condition	55	57	—	dB
Smearing	SMR	1/10V	—	—	-140	dB
Lag	LAG	G output signal : 20mV, 1st field	—	0	1	mV
Power Supply Current	IDD	VDD = 3.3V	—	15	20	mA

## (\*1) Standard conditions


- Light conditions : Color temperature 3200K halogen light box. Surface brightness: 100nt of equal white light.
- IR cut filter
- Optical lens : f25mm, F0.85 lens manufactured by Fujinon Lens Co., Ltd. Set to the F1.4.
- Frame frequency : 30Hz continual operations, electronic shutter off (storage time = 1/30 s).

PIXEL ARRANGEMENT

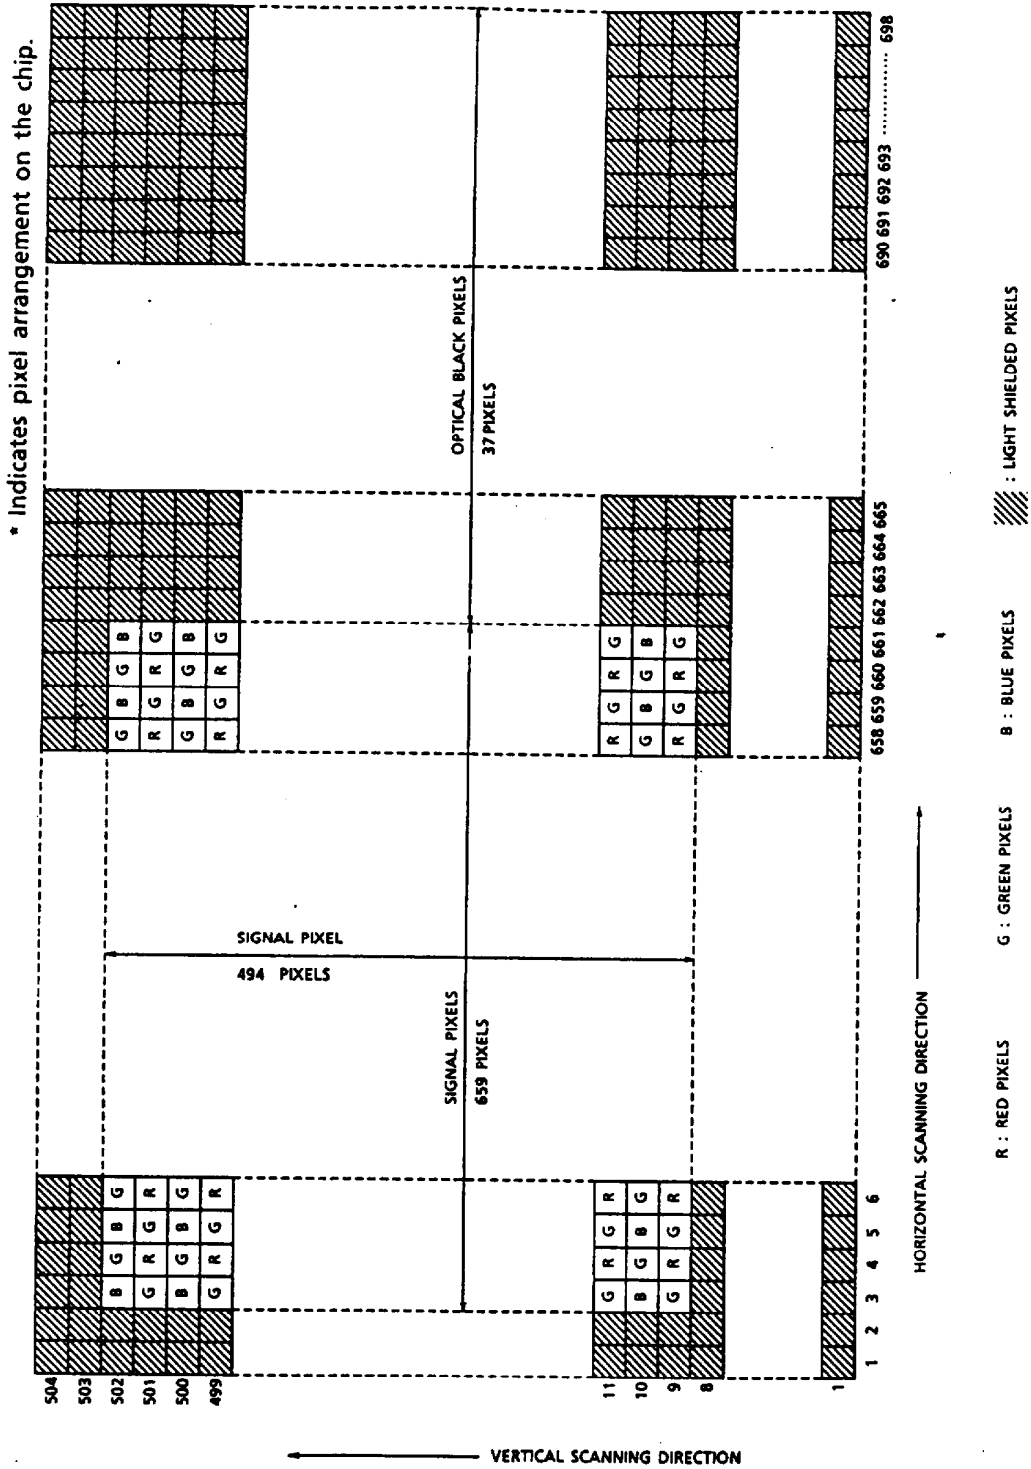


DRIVE TIMING DIAGRAM VGA progressive scanning mode (30Hz, 1V = 525H)

(1) V Blanking

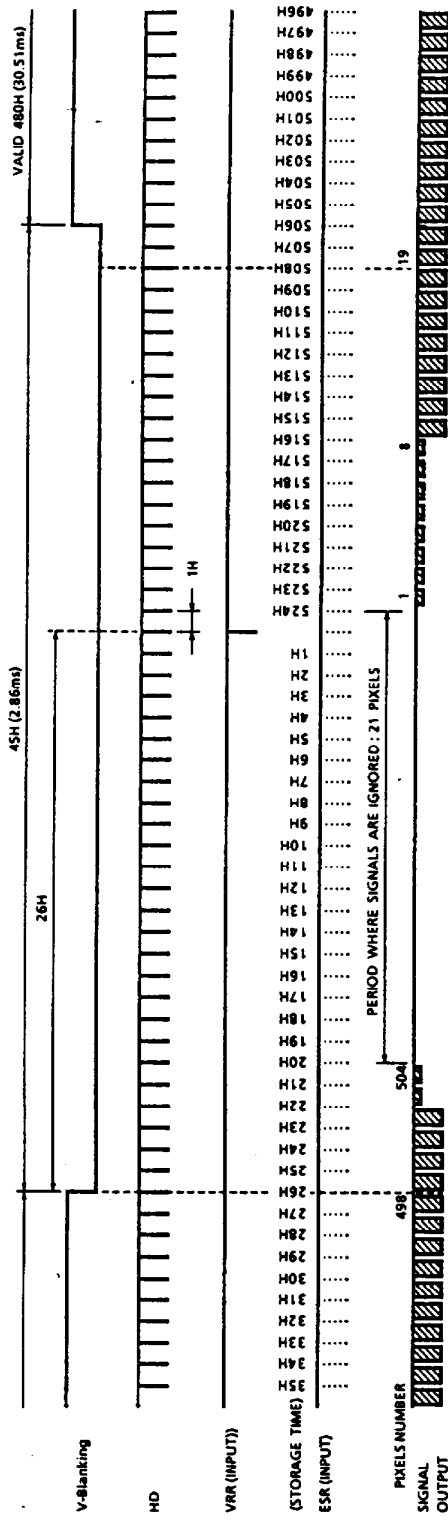


(2) H Blanking

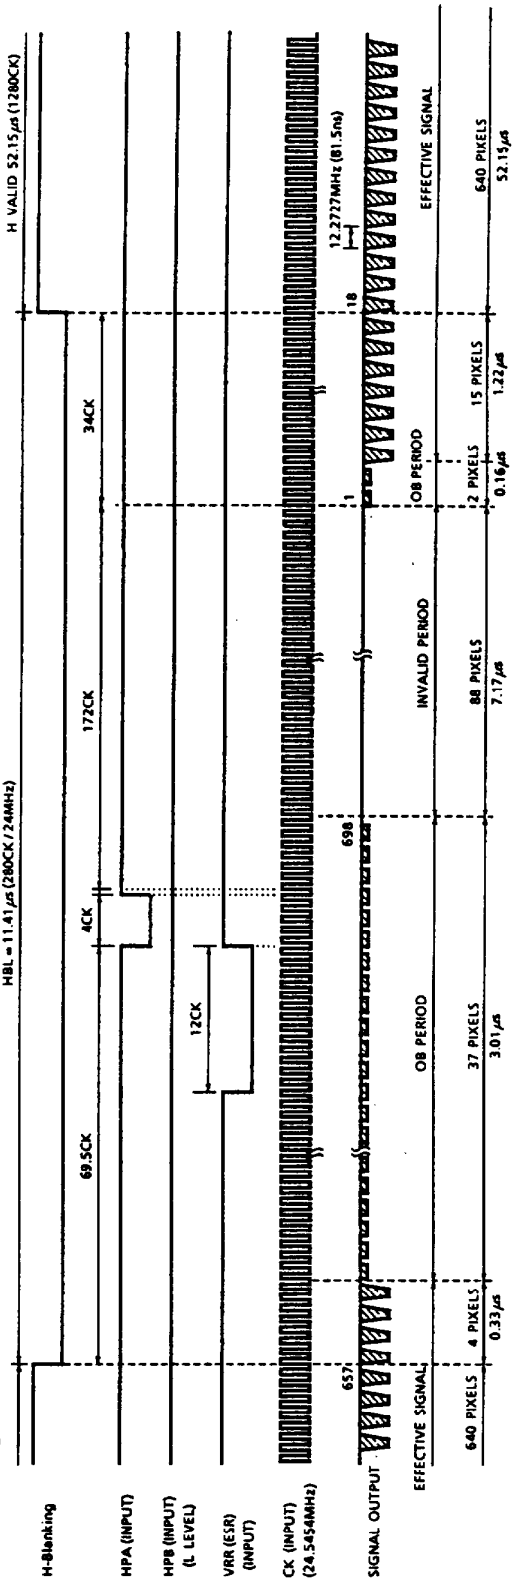


DRIVE TIMING DIAGRAM Monitoring mode


(1) V Blanking

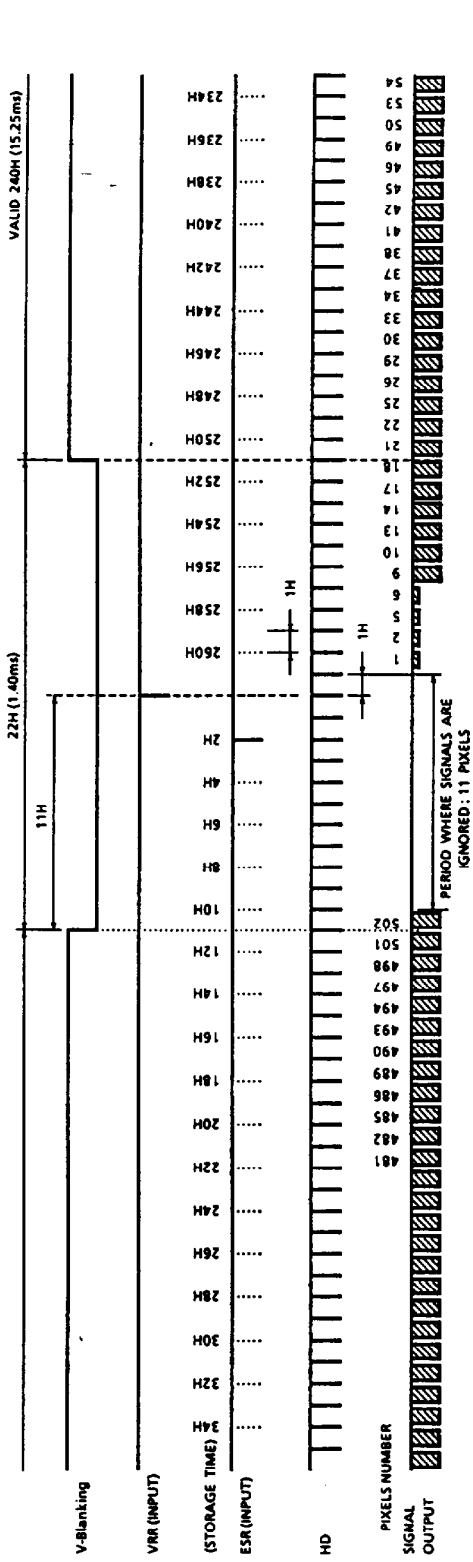

(2) H Blanking

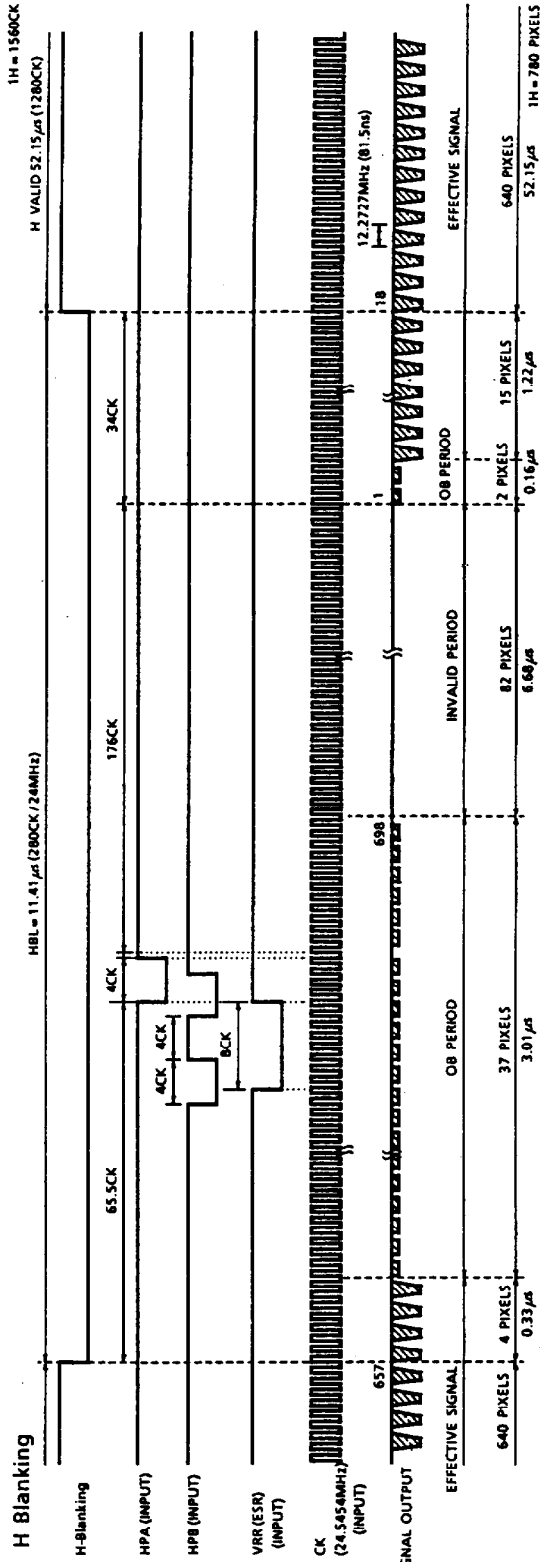

DRIVE TIMING DIAGRAM

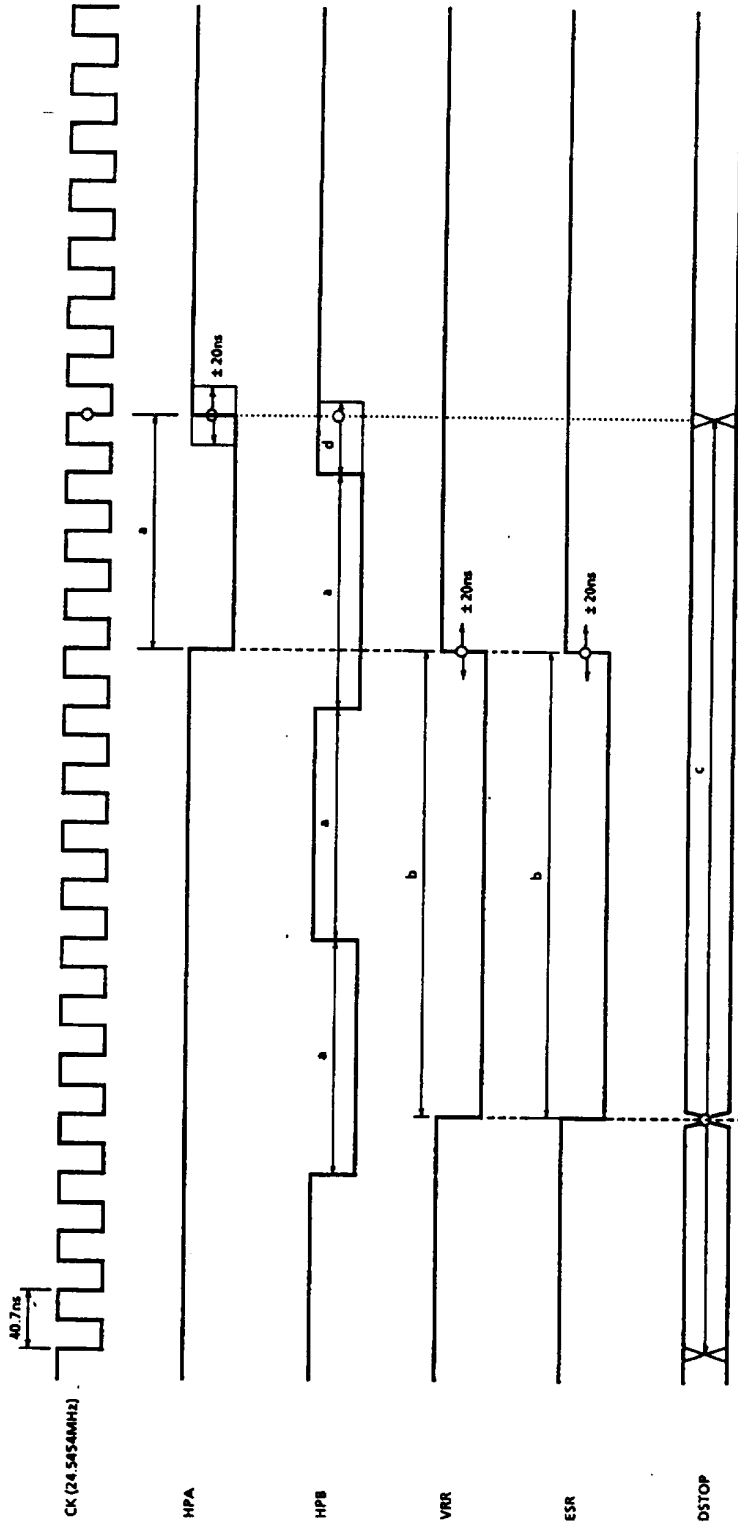


Timing Margin (ns)

	Min.	Typ.	Max.
a	40	153	
b	81	326	
c	-160	0	a+b
d	-81	40	2


(Note 1) ○ is basic point.  
 (Note 2) DSTOP should be changed after VRR (ESR).



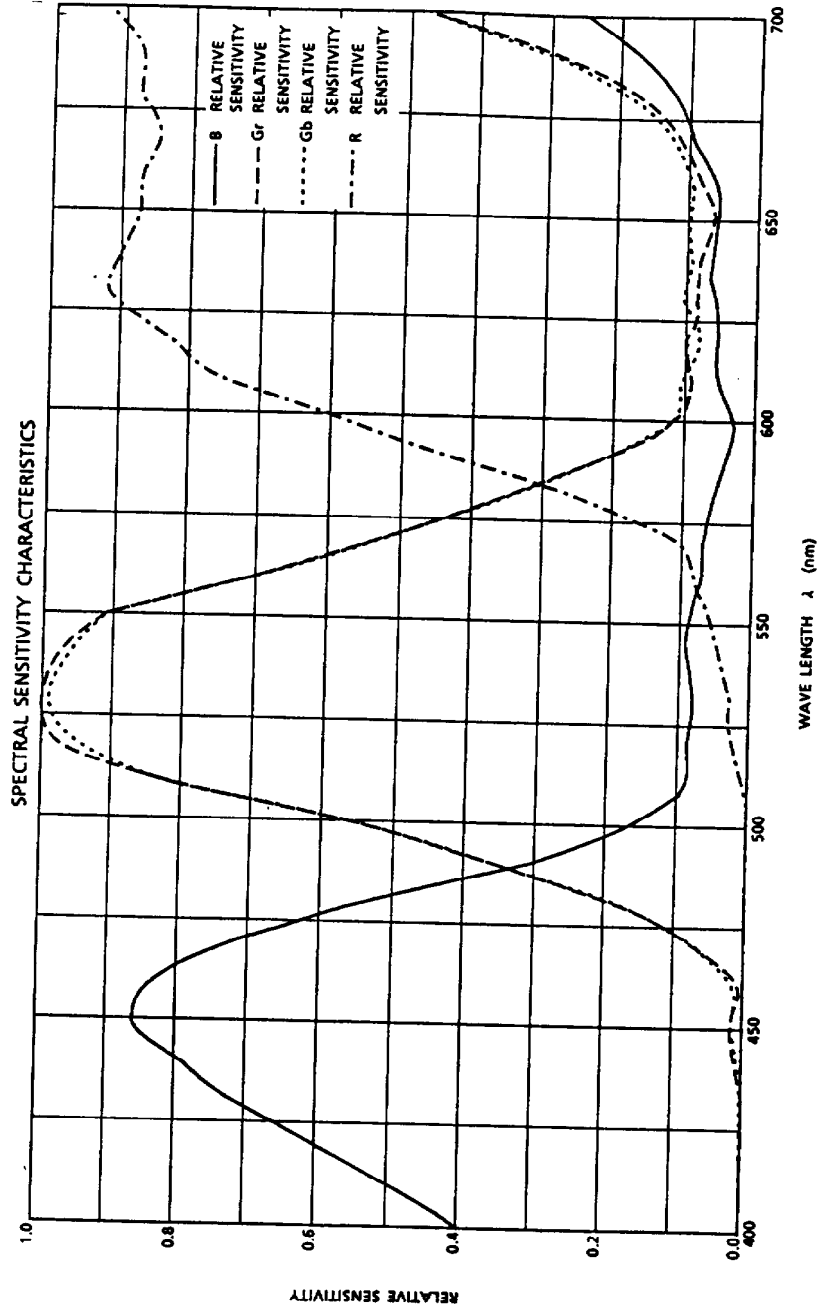

OUTLINE DRAWING

Unit : mm

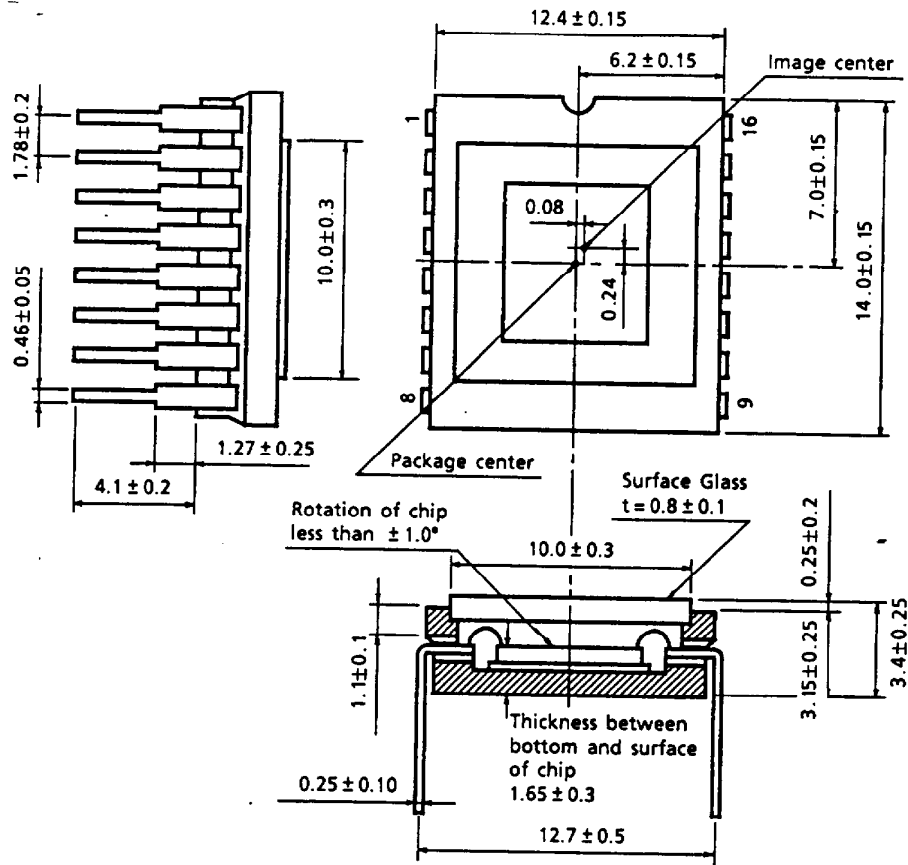

Weight : 1.9g (Typ.)