


Ultrafast Recovery Modules

UFT150, 151 & 152

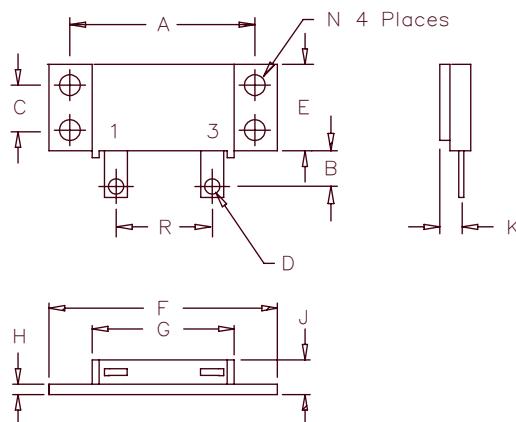

Notes:
 Baseplate: Nickel plated copper,
 common cathode
 Pins: Nickel plated copper

Dim.		Inches	Millimeters	
Min.	Max.	Min.	Max.	Notes
A	1.995	2.005	50.67	50.93
B	0.300	0.325	7.62	8.26
C	0.495	0.505	12.57	12.83
D	0.182	0.192	4.62	4.88
E	0.990	1.010	25.15	25.65
F	2.390	2.410	60.71	61.21
G	1.490	1.510	37.85	38.35
H	0.120	0.130	3.05	3.30
J	---	0.400	---	10.16
K	0.240	0.260	6.10	6.60 to Lead Q
L	0.490	0.510	12.45	12.95
M	0.330	0.350	8.38	8.90
N	0.175	0.195	4.45	4.95
P	0.035	0.045	0.89	1.14
R	0.890	0.910	22.61	23.11

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
UFT15010*	100V	100V	100V
UFT15015*	150V	150V	150V
UFT15020*	200V	200V	200V
UFT15130*	300V	300V	300V
UFT15140*	400V	400V	400V
UFT15150*	500V	500V	500V
UFT15260*	600V	600V	600V
UFT15270*	700V	700V	700V
UFT15280*	800V	800V	800V

Add Suffix A for Common Anode, D for Doubler

- Ultra Fast Recovery
- 175°C Junction Temperature
- V_{RRM} 100 to 800 Volts
- High surge capacity
- 2 X 75 Amp current rating
- ROHS Compliant

Electrical Characteristics

	UFT150	UFT151	UFT152	
Average forward current per pkg	$I_F(AV)$	150A	150A	Square Wave
Average forward current per leg	$I_F(AV)$	75A	75A	Square Wave
Case Temperature	T_C	120°C	100°C	$R_{\theta JC} = 0.85^{\circ}\text{C}/\text{W}$
Maximum surge current per leg	I_{FSM}	1000A	800A	8.3ms, half sine, $T_J = 175^{\circ}\text{C}$
Max peak forward voltage per leg	V_{FM}	.975V	1.25V	$I_{FM} = 70\text{A}$: $T_J = 25^{\circ}\text{C}^*$
Max reverse recovery time per leg	t_{rr}	50ns	60ns	$1/2\text{A}, 1\text{A}, 1/4\text{A}, T_J = 25^{\circ}\text{C}$
Max peak reverse current per leg	I_{RM}	—	3.0mA	$V_{RRM}, T_J = 125^{\circ}\text{C}^*$
Max peak reverse current per leg	I_{RM}	—	25μA	$V_{RRM}, T_J = 25^{\circ}\text{C}$
Typical Junction capacitance	C_J	300pF	150pF	$V_R = 10\text{V}, T_J = 25^{\circ}\text{C}$

*Pulse test: Pulse width 300μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	0.85°C/W Junction to case
Max thermal resistance per leg	$R_{\theta JC}$	0.425°C/W Junction to case
Typical thermal resistance per pkg	$R_{\theta JC}$	0.8°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.1°C/W Case to sink
Mounting Torque		15–20 inch pounds
Weight		2.5 ounces (71 grams) typical

UFT150

Figure 1
Typical Forward Characteristics – Per Leg

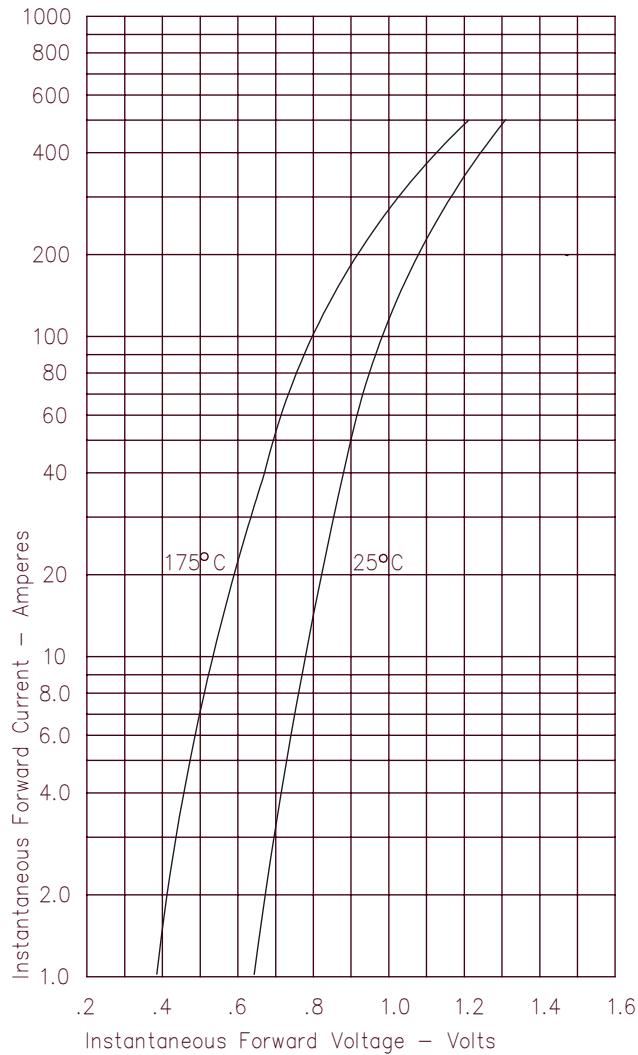


Figure 2
Typical Reverse Characteristics – Per Leg

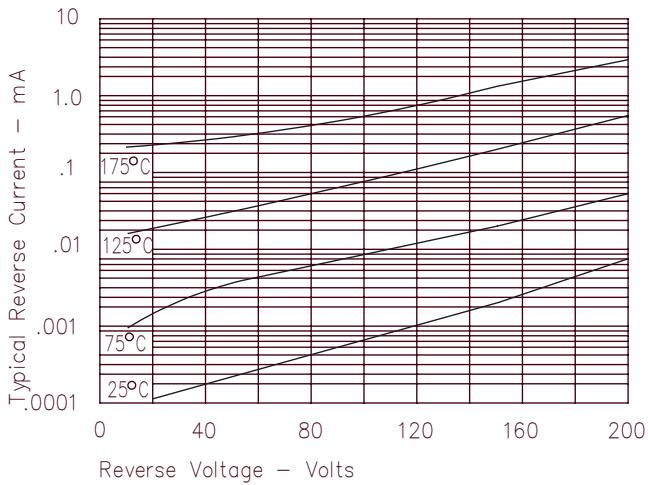


Figure 3
Typical Junction Capacitance – Per Leg

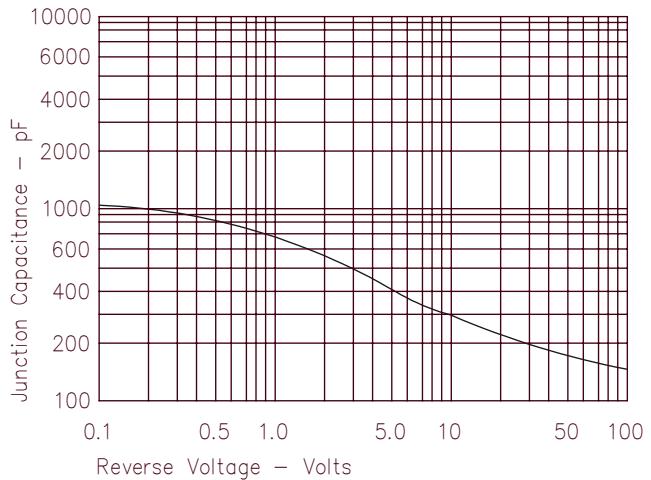


Figure 4
Forward Current Derating – Per Leg


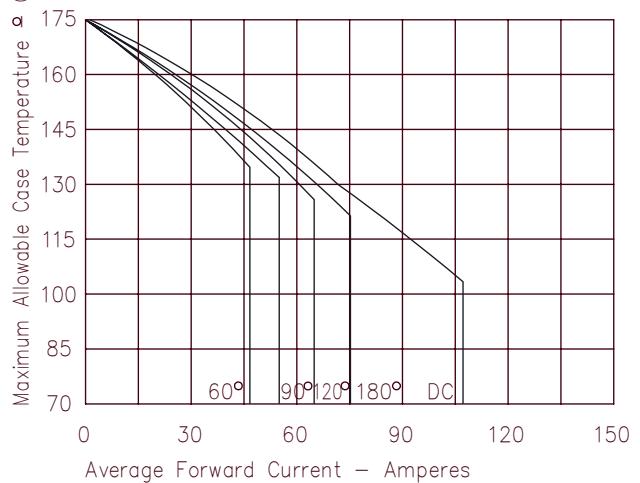


Figure 5
Maximum Forward Power Dissipation – Per Leg

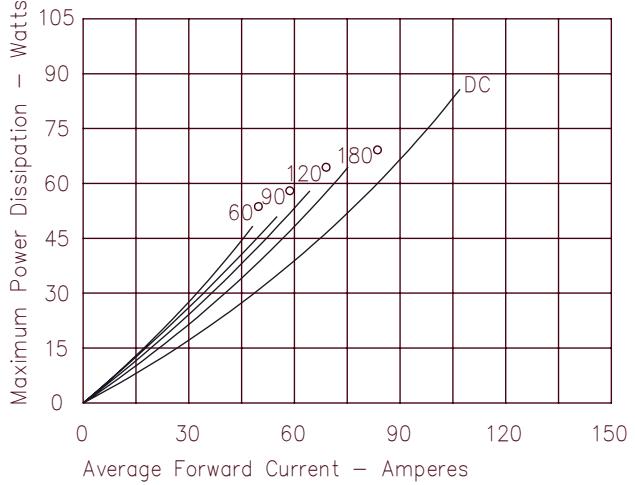

UFT151

Figure 1
Typical Forward Characteristics – Per Leg

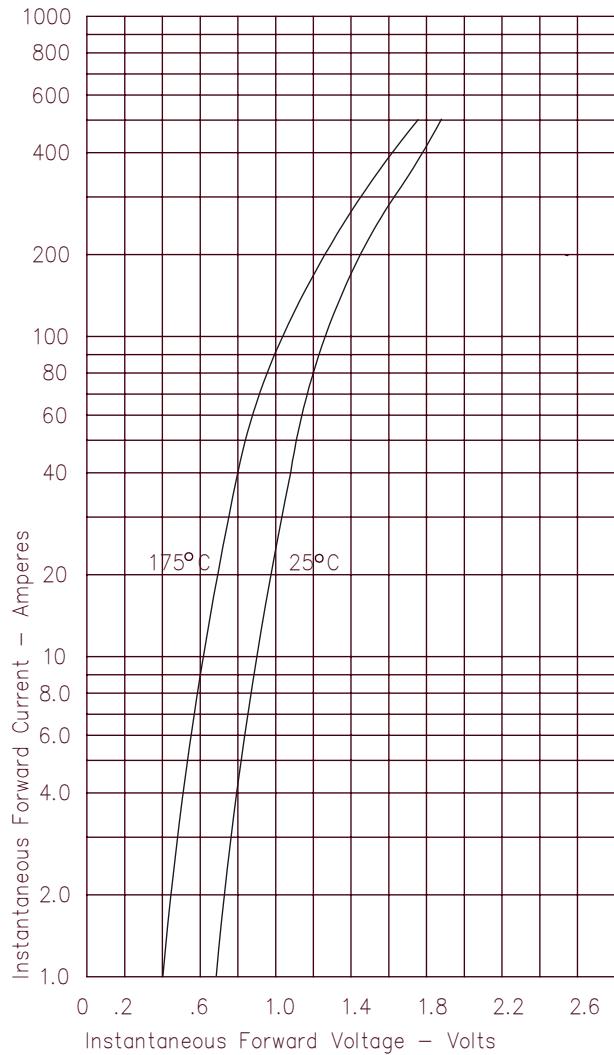


Figure 2
Typical Reverse Characteristics – Per Leg

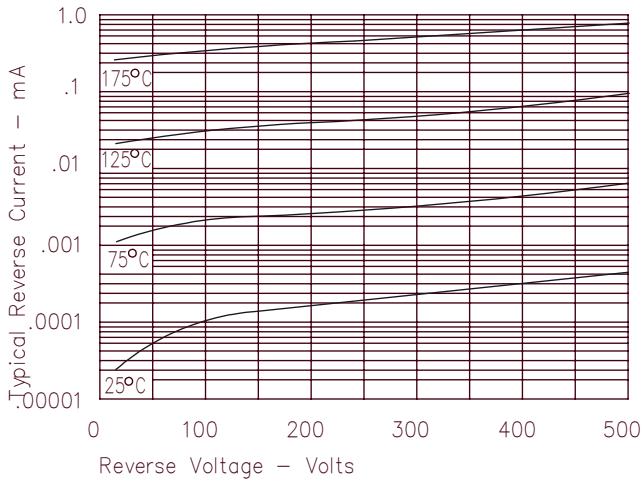


Figure 3
Typical Junction Capacitance – Per Leg

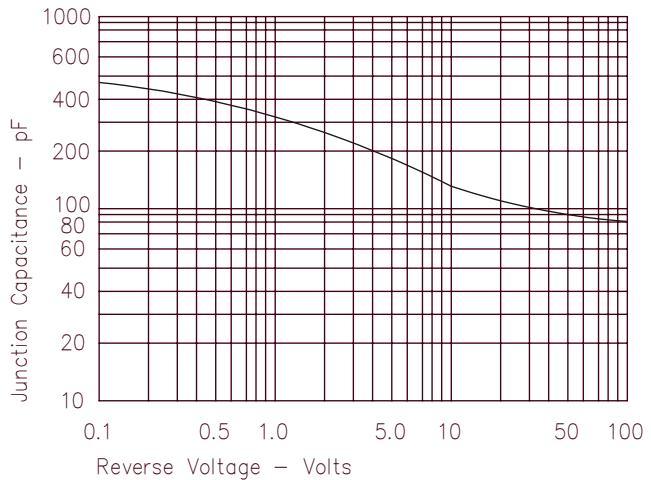


Figure 4
Forward Current Derating – Per Leg


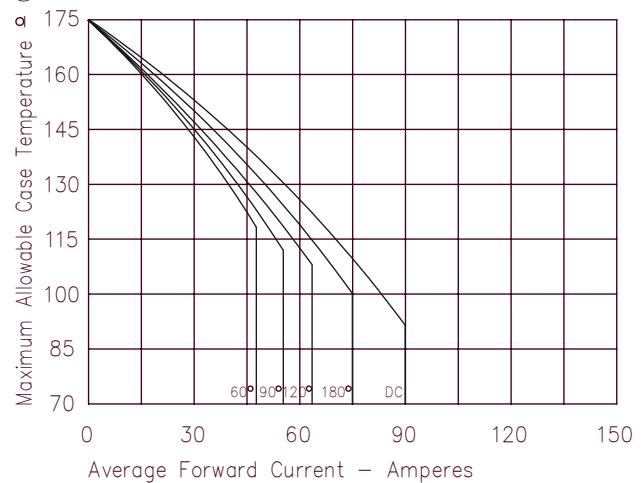


Figure 5
Maximum Forward Power Dissipation – Per Leg

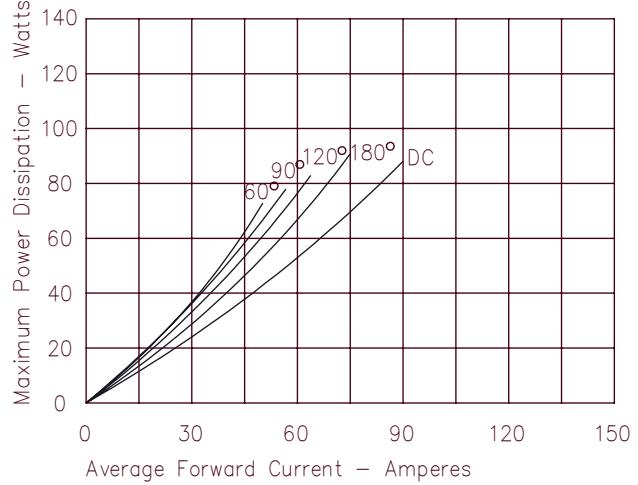

UFT152

Figure 1
Typical Forward Characteristics – Per Leg

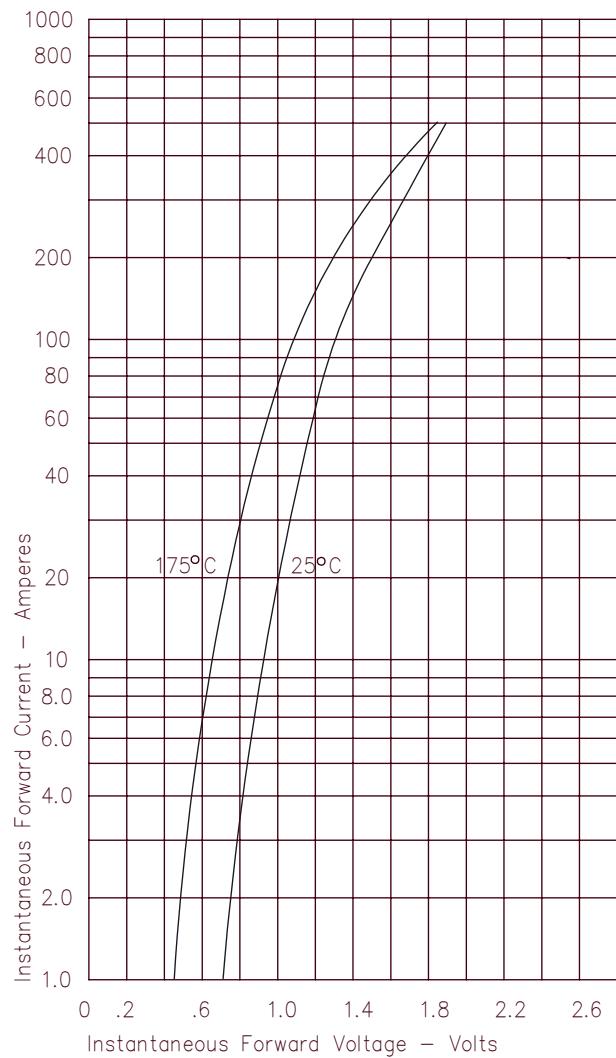


Figure 2
Typical Reverse Characteristics – Per Leg

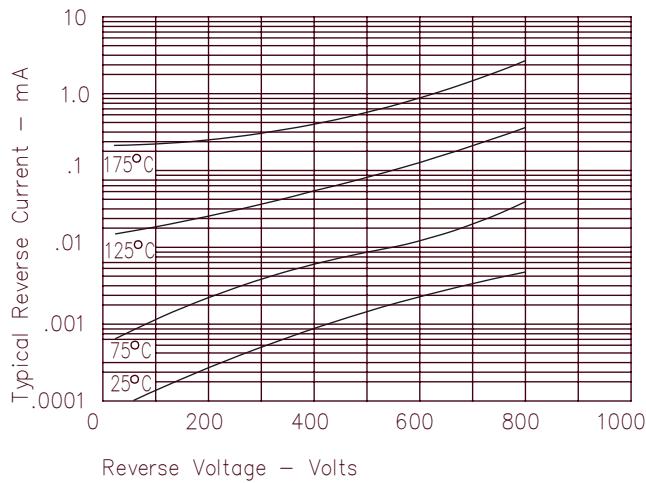


Figure 3
Typical Junction Capacitance – Per Leg

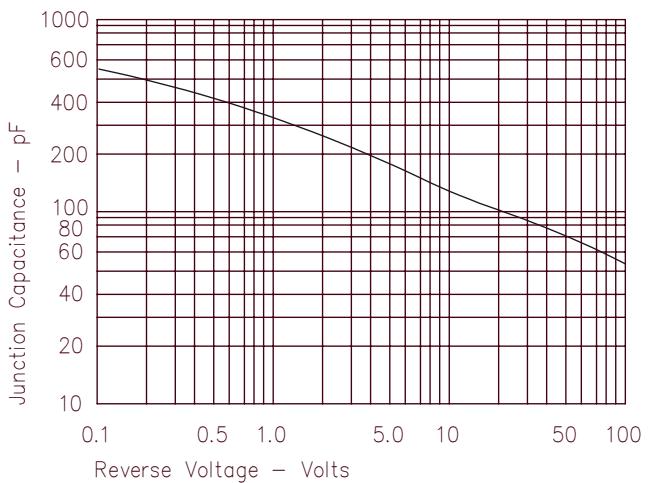


Figure 4
Forward Current Derating – Per Leg

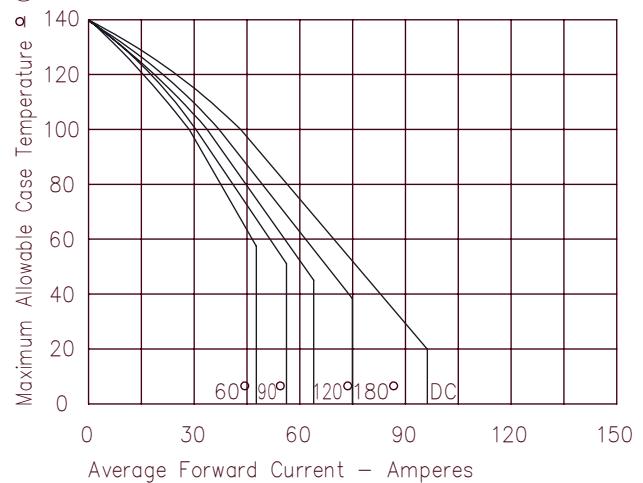


Figure 5
Maximum Forward Power Dissipation – Per Leg

