

High Brightness LED Power Module



FEATURES

- Metal core PCB: Al > 1 thickness
- Single side/single layer PCB
- Shiny white surface
- 6 or 12 LED's minimum 82 lm at 350 mA each
- Prepared to divide in half strips also, by cutting
- Conductive top layer: Cu (min. 18 μm)
- Isolation layer prepreg (100 μm)
- ESD withstand voltage: up to 2 kV according to JESD22-A114-B
- Color binning
- LM80 certified LEDs
- Compliant to RoHS Directive 2002/95/EC



RoHS
COMPLIANT
GREEN
(5-2008)**

DESCRIPTION

VLPC1201A2, VLPC1201A2J and VLPC0601A2 are metal core based high brightness LED power modules assembled with 6 or 12 white LED's. Color temperature range of 5000 K to 7000 K.

The VLPC1201A2J has 12 units in row, while the VLPC1201A2 can be divided in 2 strips 6 LED's each by sawing or driven as 2 x 6 LED's.

PRODUCT GROUP AND PACKAGE DATA

- Product group: LED
- Package: LED module
- Product series: power
- Angle of half intensity: ± 80°

APPLICATIONS

- Automotive internal lighting
- Internal lighting in buildings
- Tunnel lights
- Reading lamp, table lamp
- General lighting application

PARTS TABLE				
PART	COLOR	LUMINOUS FLUX (at I _F = 700 mA typ.)	COLOR TEMPERATURE K	TECHNOLOGY
VLPC0601A2	Cool white	Φ _V = 870 lm	5000 to 7000	InGaN
VLPC1201A2	Cool white	Φ _V = 2 x 870 lm	5000 to 7000	InGaN
VLPC1201A2J	Cool white	Φ _V = 1740 lm	5000 to 7000	InGaN

ABSOLUTE MAXIMUM RATINGS (T _{amb} = 25 °C, unless otherwise specified) VLPC0601A2, VLPC1201A2, VLPC1201A2J					
PARAMETER	TEST CONDITION	PART	SYMBOL	VALUE	UNIT
Forward current			I _F	700	mA
Power dissipation	Total	VLPC0601A2	P _{tot}	16.1	W
		VLPC1206A2	P _{tot}	32.2	W
		VLPC1206A2J	P _{tot}	32.2	W
Junction temperature			T _j	120	°C
Operating temperature range			T _{amb}	- 40 to + 85	°C
Storage temperature range			T _{stg}	- 40 to + 85	°C
Decomposition temperature of PCB (for cable assembly)	3 x 10 s		T _D	350	°C

** Please see document "Vishay Material Category Policy": www.vishay.com/doc?99902

VLPC0601A2, VLPC1201A2, VLPC1201A2J



Vishay Semiconductors High Brightness LED Power Module

OPTICAL AND ELECTRICAL CHARACTERISTICS ⁽¹⁾ ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)						
VLPC0601A2, COOL WHITE						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous flux total ⁽²⁾	$I_F = 700\text{ mA}$	Φ_V	760	870	-	lm
Color temperature	$I_F = 700\text{ mA}$	TK	5000	-	7000	K
Forward voltage	$I_F = 700\text{ mA}$	V_F	19	20	23	V
Temperature coefficient of V_F	$I_F = 350\text{ mA}$	TC_{V_F}	-	- 21	-	mV/K
Temperature coefficient of Φ_V	$I_F = 350\text{ mA}$	TC_{Φ_V}	-	- 0.4	-	%/K

Notes

- (1) Forward voltages are tested at a current pulse duration of 1 ms and a tolerance of $\pm 0.1\text{ V}$. Luminous flux is measured at a current pulse duration of 25 ms and an accuracy of $\pm 11\%$.
 (2) Calculated based on single LED unit.

OPTICAL AND ELECTRICAL CHARACTERISTICS ⁽¹⁾ ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)						
VLPC1201A2J, COOL WHITE						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous flux total ⁽²⁾	$I_F = 700\text{ mA}$	Φ_V	1520	1740	-	lm
Color temperature	$I_F = 700\text{ mA}$	TK	5000	-	7000	K
Forward voltage	$I_F = 700\text{ mA}$	V_F	-	42	46	V
Temperature coefficient of V_F	$I_F = 350\text{ mA}$	TC_{V_F}	-	- 40	-	mV/K
Temperature coefficient of Φ_V	$I_F = 350\text{ mA}$	TC_{Φ_V}	-	- 0.4	-	%/K

Notes

- (1) Forward voltages are tested at a current pulse duration of 1 ms and a tolerance of $\pm 0.1\text{ V}$. Luminous flux is measured at a current pulse duration of 25 ms and an accuracy of $\pm 11\%$.
 (2) Calculated based on single LED unit.

OPTICAL AND ELECTRICAL CHARACTERISTICS ⁽¹⁾ ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)						
VLPC1201A2, COOL WHITE						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous flux total ⁽²⁾	$I_F = 700\text{ mA}$	Φ_V	2 x 760	2 x 870	-	lm
Color temperature	$I_F = 700\text{ mA}$	TK	5000	-	7000	K
Forward voltage per 6 LEDs	$I_F = 700\text{ mA}$	V_F	-	20	23	V
Temperature coefficient of V_F per 6 LEDs	$I_F = 350\text{ mA}$	TC_{V_F}	-	- 20	-	mV/K
Temperature coefficient of Φ_V	$I_F = 350\text{ mA}$	TC_{Φ_V}	-	- 0.4	-	%/K

Notes

- (1) Forward voltages are tested at a current pulse duration of 1 ms and a tolerance of $\pm 0.1\text{ V}$. Luminous flux is measured at a current pulse duration of 25 ms and an accuracy of $\pm 11\%$.
 (2) Calculated based on single LED unit.

SPECIFICATION OF SINGLE LEDs USED FOR THE MODULES

- VLPC0601A2: LED:
- VLPC1201A2: LED: VLMW911KYKZ6P7R
- VLPC1201A2J: LED:

LUMINOUS FLUX CLASSIFICATION FOR THE SINGLE LED		
GROUP	LUMINOUS FLUX Φ_V (lm) CORRELATION TABLE	
STANDARD	MIN.	MAX.
KY	82 000	97 000
KZ	97 000	112 000



COLOR RANGE AND COLOR BINNING

VLPC0601A2; VLPC1201A2: 5000 K to 7000 K group 6P to 7R

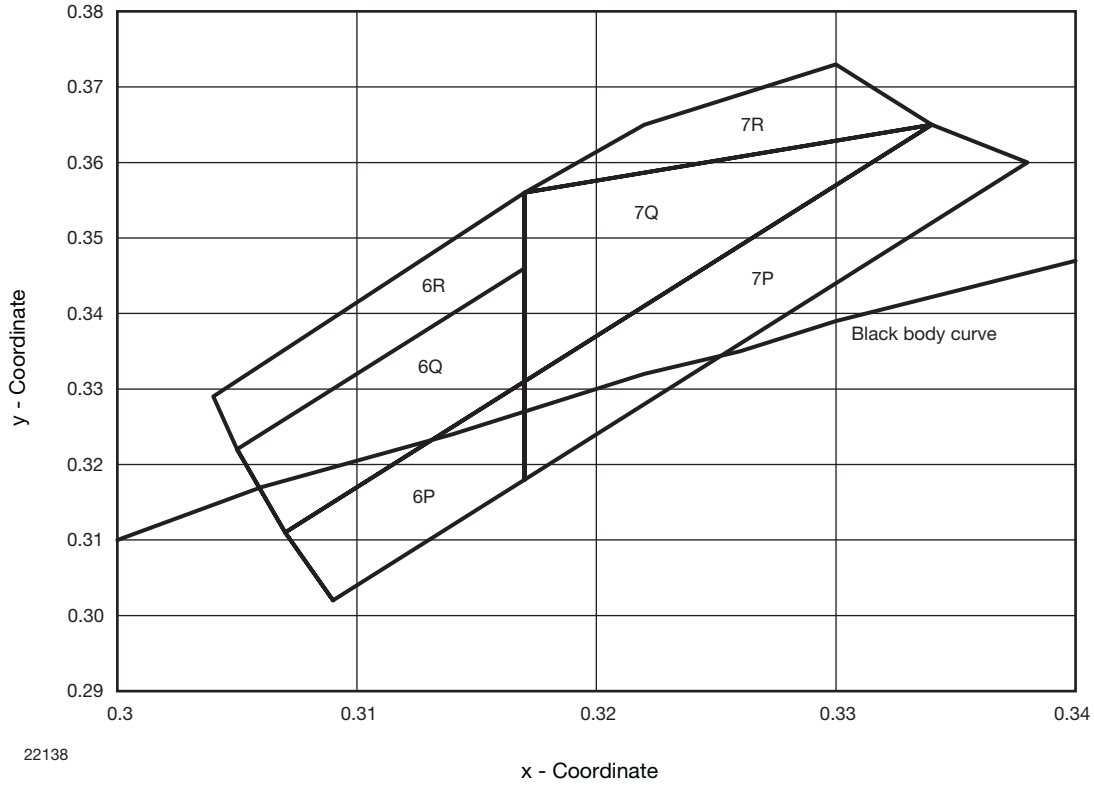


Fig. 1 - Chromaticity Coordinates of Colorgroups


CHROMATICITY COORDINATED GROUPS FOR COOL WHITE SMD LED								
GROUP	X	Y	GROUP	X	Y	GROUP	X	Y
6P	0.309	0.302	6Q	0.307	0.311	6R	0.305	0.322
	0.307	0.311		0.305	0.322		0.304	0.329
	0.317	0.331		0.317	0.346		0.317	0.356
	0.317	0.318		0.317	0.331		0.317	0.346
7P	0.317	0.318	7Q	0.317	0.331	7R	0.317	0.356
	0.317	0.331		0.317	0.356		0.322	0.365
	0.334	0.365		0.334	0.365		0.330	0.373
	0.338	0.360		0.317	0.331		0.334	0.365

VLPC0601A2, VLPC1201A2, VLPC1201A2J

Vishay Semiconductors High Brightness LED Power Module




PCB BASIC DESIGN Dimensions in millimeters

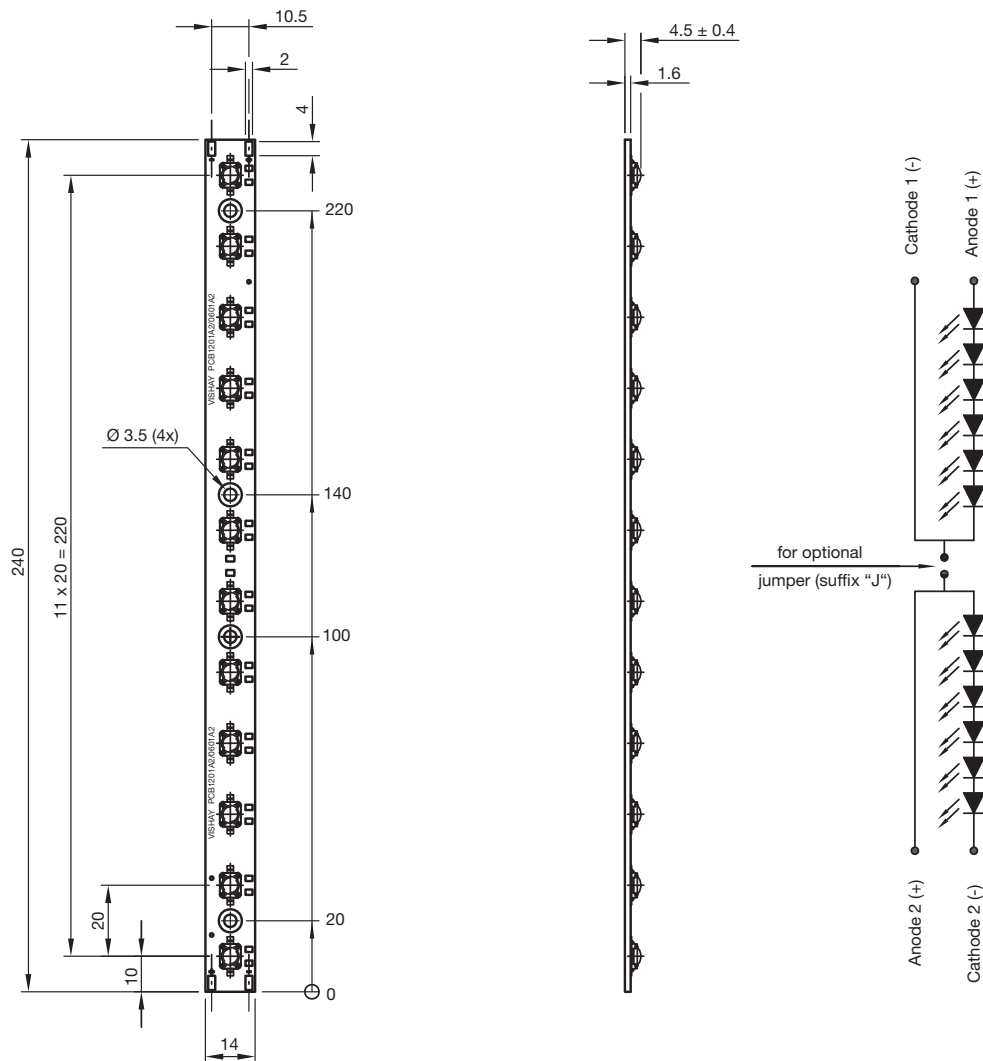

Drawing-No.: 9.920-6754.01-4
 Issue: 1 ; 02.11.10
 22435

Not indicated tolerances ± 0.2







VLPC0601A2, VLPC1201A2, VLPC1201A2J

High Brightness LED Power Module Vishay Semiconductors

PCB BASIC DESIGN Dimensions in millimeters

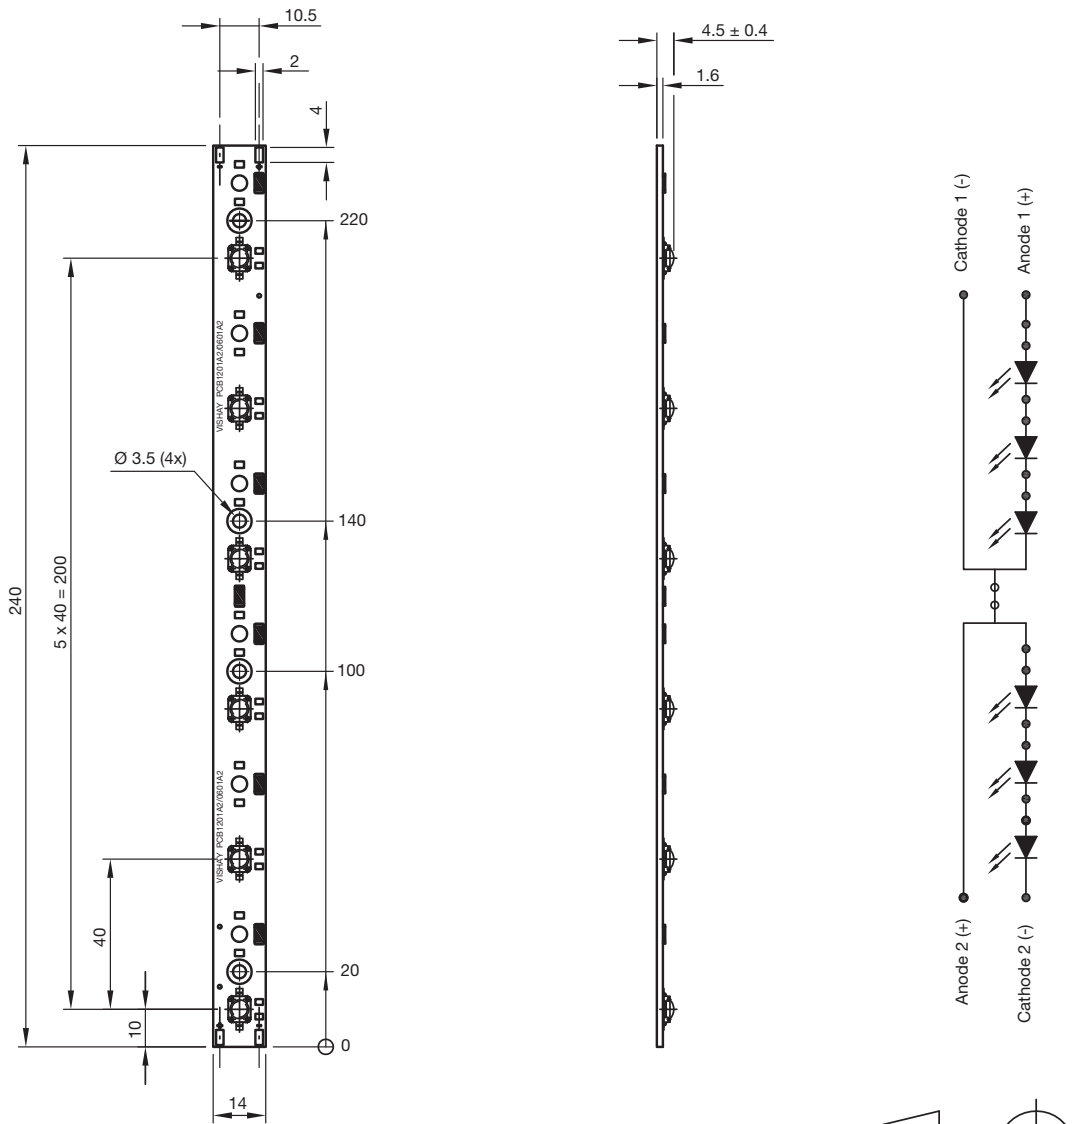

Not indicated tolerances ± 0.2



technical drawings
according to DIN
specifications

Drawing-No.: 9.920-6756.01-4
Issue: 1 ; 02.11.10
22436

VLPC0601A2, VLPC1201A2, VLPC1201A2J

Vishay Semiconductors High Brightness LED Power Module



PCB CHARACTERISTICS

- Metal core PCB: Al (minimum 1000 μm - thickness)
- Prepreg minimum 63 μm
- Conductive pattern Cu minimum 18 μm
- Free of burrs
- Compliant to RoHS Directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition
- Solder resist on top side
- Shiny white surface (glossy-white Taiyo-PSR 2000)
- Galvanic of solder pads and backside pure matte Sn (0.8 μm to 1.2 μm)
- Assembled with 6 or 12 VLMW911xxx LED's. LED position accuracy ± 0.3

EMISSION CHARACTERISTIC


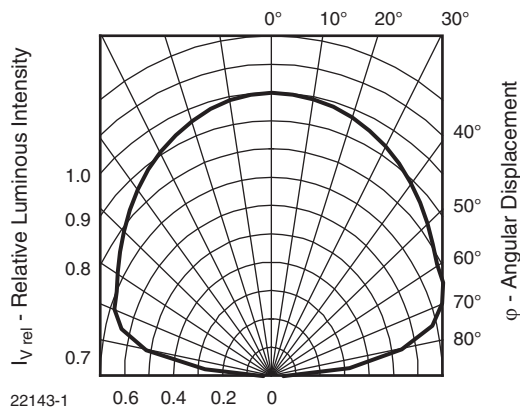


Fig. 2 - Rel. Luminous Intensity vs. Angular Displacement

BAR CODE PRODUCT LABEL

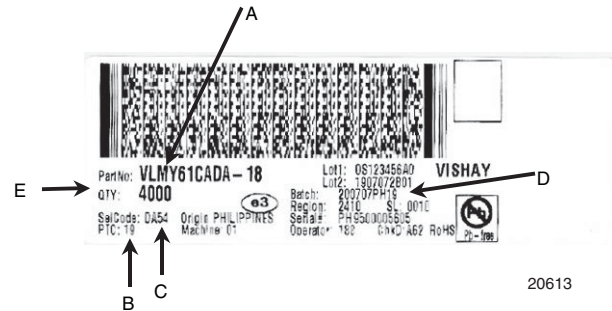

- A. Type of component
- B. Manufacturing plant
- C. SEL - selection code (bin):
X = color group
- D. Batch:
200707 = year 2007, week 07
PH19 = plant code
- E. Total quantity

Note

- 32 PCB's per box, minimum order quantity 32



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.