




# 1/4 (6.4mm) SNAP-IN PANEL MOUNT LEDs

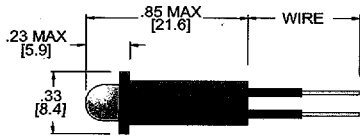


**PP251-W**

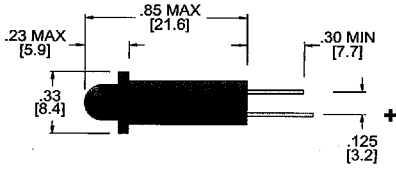


**PP251-T**




**PPL251-W**

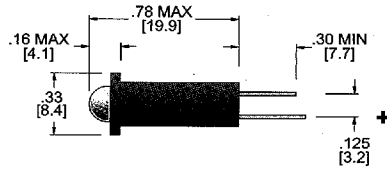


**PPL251-T**

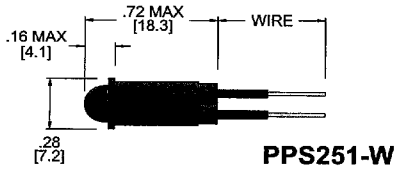


**PPS251-W**

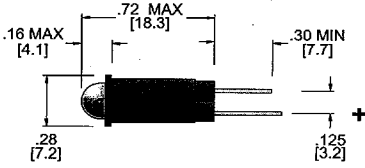


**PPS251-T**




**PPSL251-W**

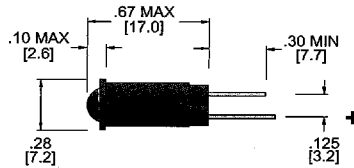

**PPSL251-T**

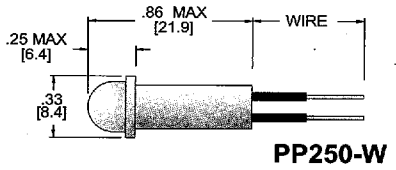


**PP250-W**

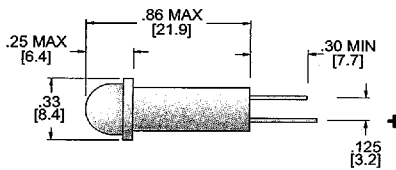


**PP250-T**

## OPTIONAL MOUNTING HARDWARE




# 1/4 (6.4mm) SNAP-IN PANEL MOUNT LEDs

## PART NUMBER SELECTION GUIDE

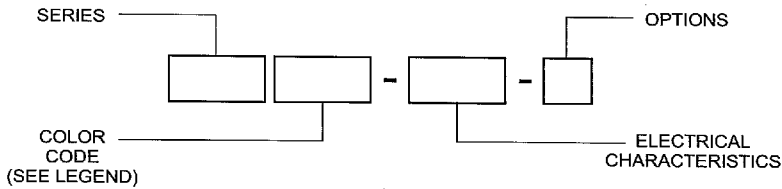

## COLOR CODE LEGEND

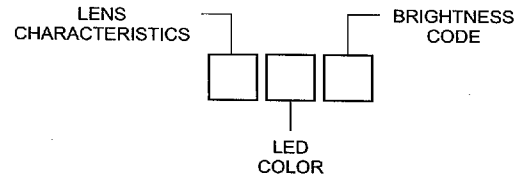

STANDARD	SERIES	COLOR CODE	ELECTRICAL CHARACTERISTICS	OPTIONS
	<b>SINGLE CHIP</b> PP251 PPL251 PPS251 PPSL251	TR5 TY5 TG5	<b>VDC</b> 2Vf 6V 14V 28V	T - WIRE TERMINAL W6 - 6" WIRE

LENS CHARACTERISTICS	LED COLOR	BRIGHTNESS CODE
T-TRANSLUCENT TW-TRANSLUCENT WHITE	R-RED Y-YELLOW G-GREEN B-BLUE O-ORANGE RG-RED/GREEN YG-YELLOW/GREEN	4-STANDARD 5-STANDARD 6-HIGH INTENSITY 3K-HIGH INTENSITY

CUSTOM	SERIES	COLOR CODE	ELECTRICAL CHARACTERISTICS		OPTIONS
	<b>SINGLE CHIP</b> PP251 PPL251 PP250 PPS251 PPSL251	TR6 TY3K TG6 T05 TB5 TWRG4 - BICOLOR TWYG4 - BICOLOR	<b>VDC</b> 5V 12V 24V	<b>VAC</b> 5VAC 6VAC 12VAC 14VAC 24VAC 28VAC	W12 - 12" WIRE W18 - 18" WIRE W24 - 24" WIRE

## PART SPECIFICATIONS

- PART NUMBERS CONSISTING OF OPTIONS NOT FOUND IN THE STANDARD BOX ARE CUSTOM.
- FOR COMPLETE PART NUMBER SELECT ONE OPTION FROM EACH OF THE FOUR COLUMNS FROM LEFT TO RIGHT.
- BRIGHTNESS CODES LISTED ARE SET BY THE FACTORY FOR ALL COLORS. THE ABOVE CHART IS FOR REFERENCE ONLY.
- MOUNTING DIAMETER 0.248 (6.3mm) TO 0.250 (6.4mm).
- PANEL THICKNESSES FROM 0.031 (0.8mm) TO 0.250 (6.4mm).
- HOUSING MATERIAL IS BLACK NYLON UL 94V-2.
- WIRE LEADS ARE RED FOR ANODE AND BLACK FOR CATHODE.
- TERMINALS ARE .020 (0.5mm) SQUARE.

■ 5423705 0000709 2TT ■