



9.6x9.6 Square/ Single Turn /Trimming Potentiometer

-- 3386U--

..... Mutual dimension.....

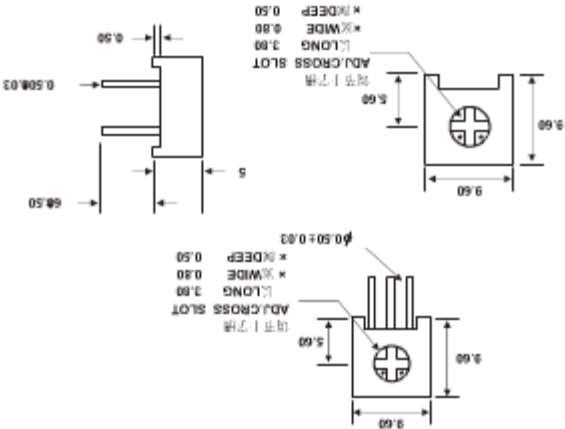

Standard Resistance Table




..... Install dimension.....

Resistance Code Resistance (Ohms)

100	10
200	20
500	50
101	100
201	200
501	500
102	1,000
202	2,000
502	5,000
103	10,000
203	20,000
253	25,000
503	50,000
104	100,000
204	200,000
254	250,000
504	500,000
105	1,000,000
205	2,000,000

Special resistances available

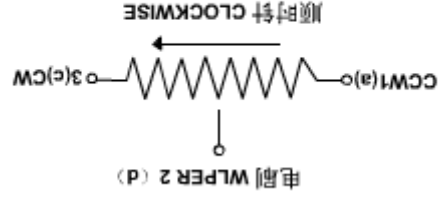

图中公式: 除注明外均为±0.25
Tolerance is ± 0.25 if no identification

Physical Characteristics

- Standard Resistance Range.....50Ω~2MΩ
- Resistance Tolerance.....±10%
- Absolute Minimum Resistance.....≤1%R或10Ω
- Contact Resistance Variation.....CRV ≤ 3%
- Insulation Resistance.....R1 ≥ 1GΩ (100Vac)
- Withstand Voltage.....600Vac
- Effective Travel.....300°
- Environmental Characteristics
- Power Rating, 315 volts max.....0.5W@70°C, 0W@125°C
- Temperature Range.....-55°C~125°C
- Temperature Coefficient.....±250ppm/°C
- Temperature Variation.....55°C, 30min, +125°C
- 5cycles.....30min
- ΔR ≤ 5%, (Uab/Uac) ≤ 10%
- Collision.....100m/s², 1000cycles, ΔR ≤ 2%
- Electrical Endurance at 70°C.....0.5W@70°C
- 1000h, ΔR ≤ 10%
- Δ(Uab/Uac) ≤ 10%, CRV ≤ 3% or 5Ω
- Rotational Life.....200cycles
- ΔR ≤ 10%, CRV ≤ 3% or 5Ω

How To Order 3386U-103

