

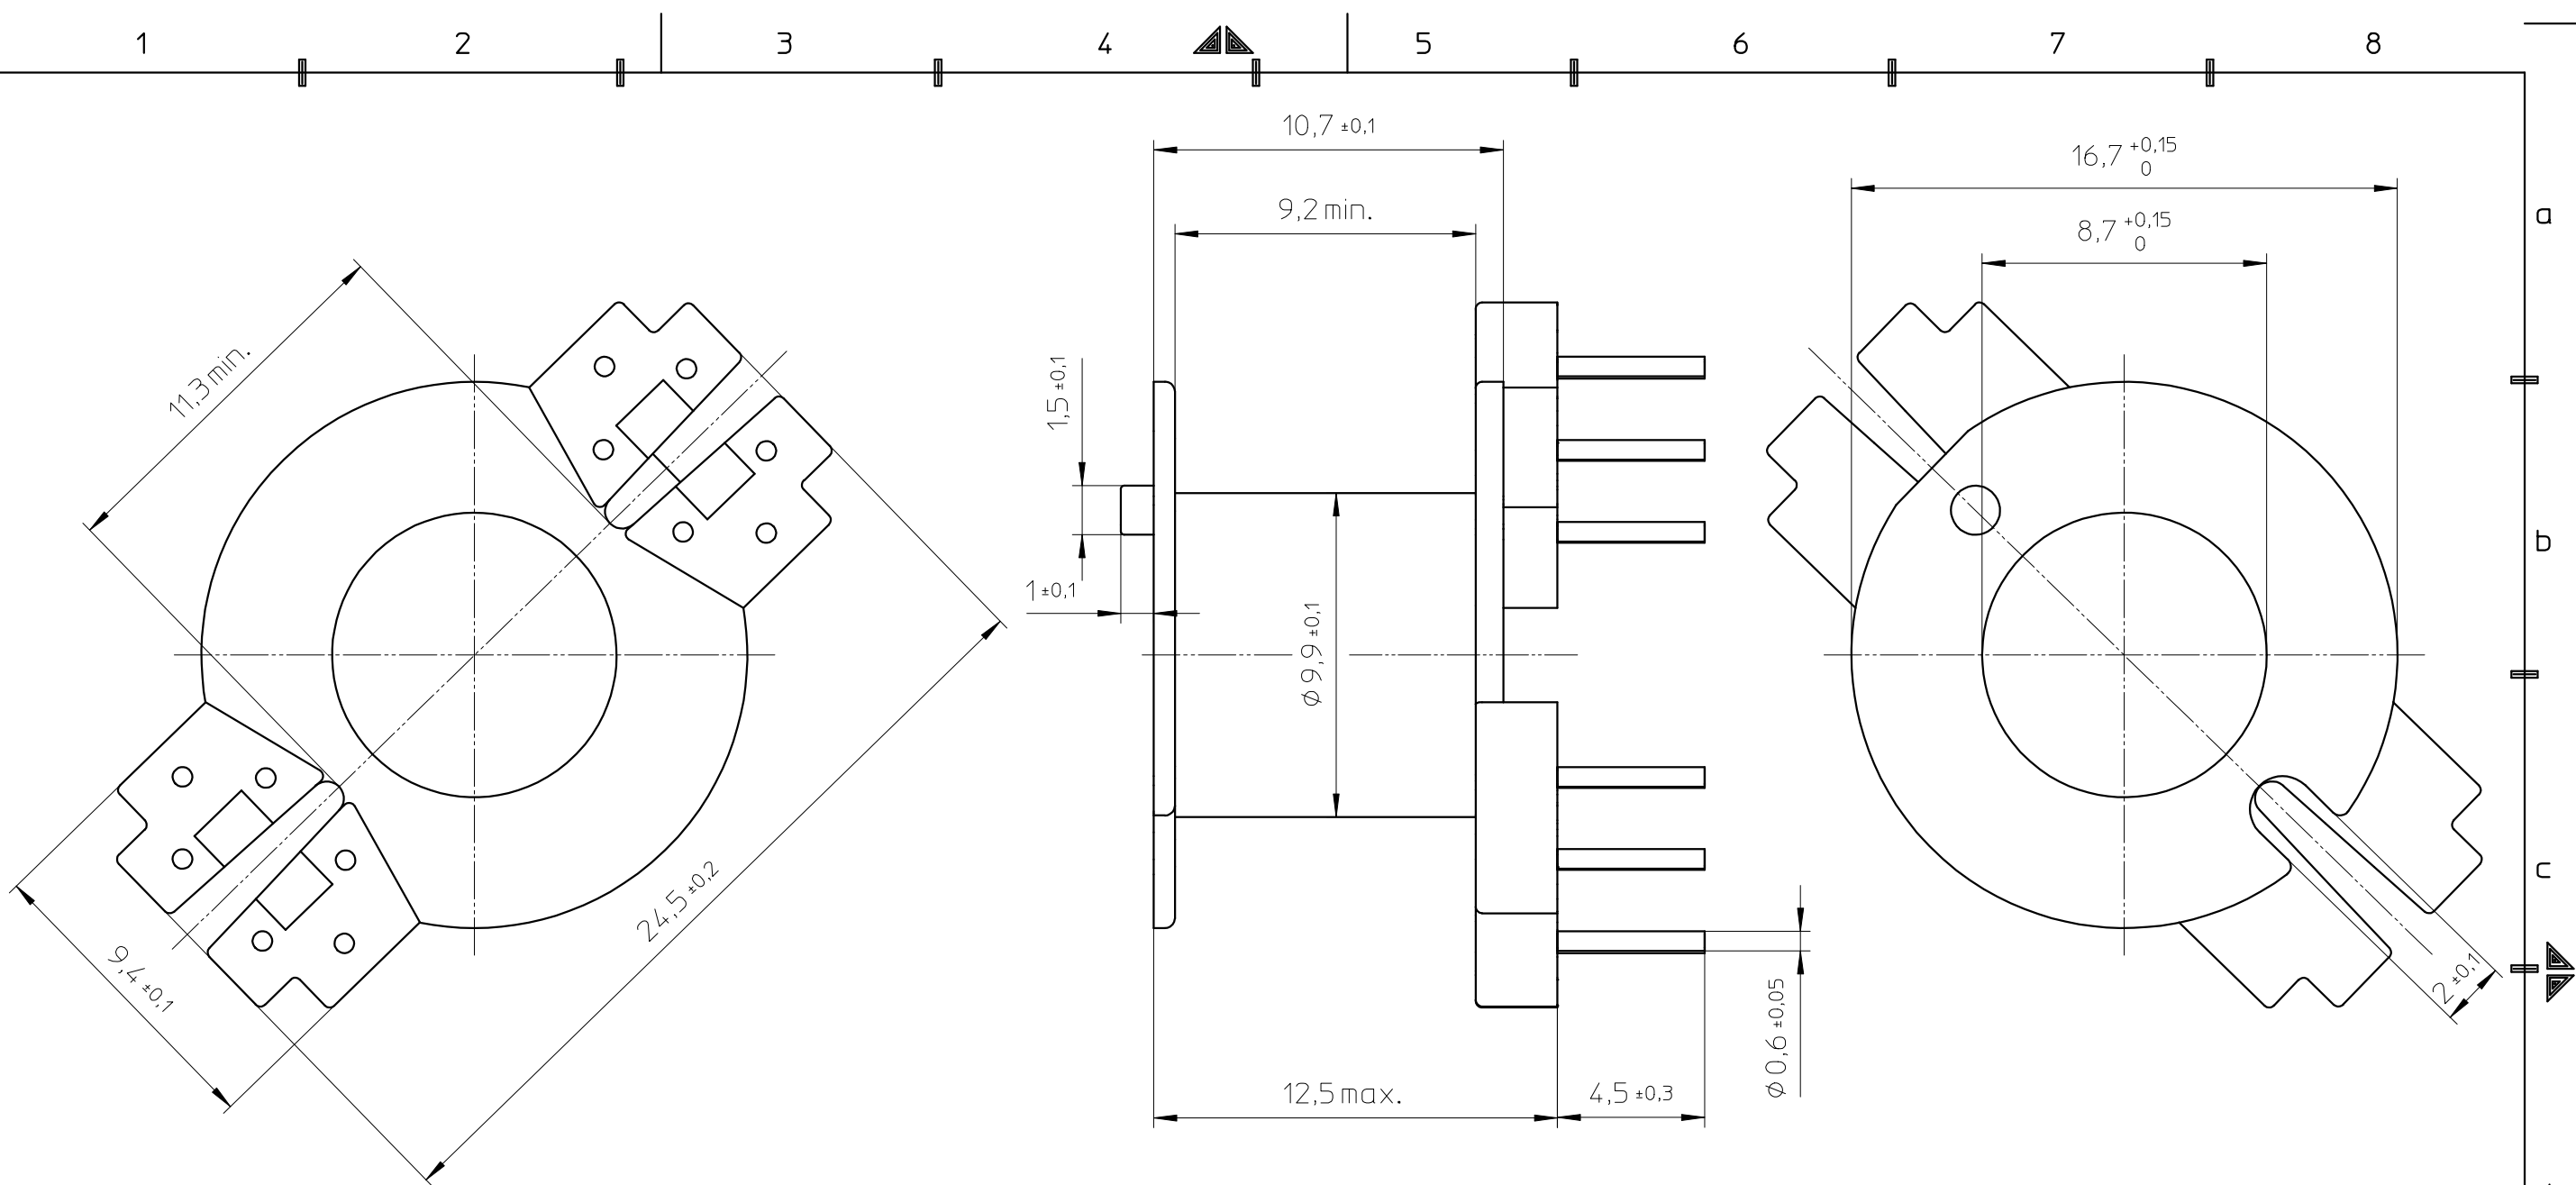





FERROXCUBE



HOLE PATTERN:

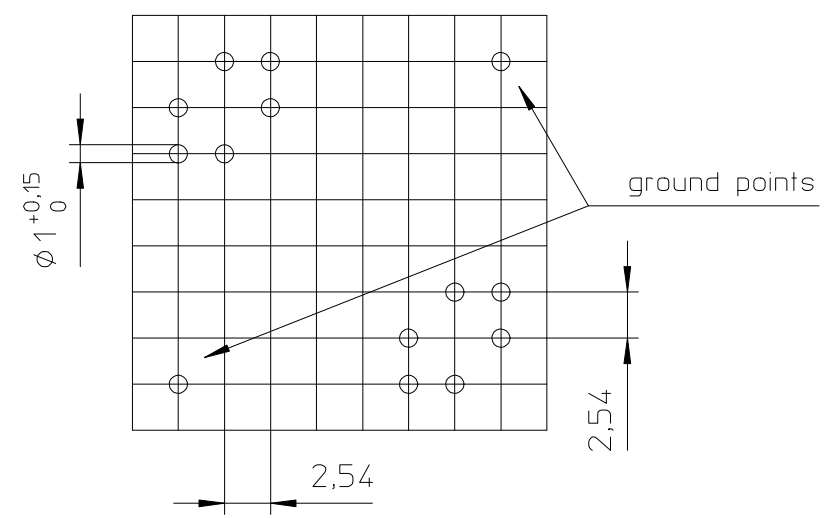

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
 UL file number: E41429(M) - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 85 class F, 150°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 31 mm².
 Mean length of turn: 42 mm.



CLASS.NO.	CSV-RM8-1S-12P-TA		98-11-09
	4322 021 02621		06-06-28
NAME NAAM	A.Wojtasz	SUPERS. VERV.	001 SH SH 112 - 001 069
MPA	CHECK CONTR.	DAT.	98-01-19
		Property of Eigendom van	© FERROXCUBE 2000
			A3