

High Speed Response, 30 mm Square, Bialkali and Multialkali Photocathode  
10-stage, Head-on Type

## FEATURES

- Effective Area: 18 mm × 18 mm
- High Cathode Sensitivity  
Luminous 200  $\mu\text{A}/\text{lm}$  Typ. (R5900U-01 Type)  
Luminous 500  $\mu\text{A}/\text{lm}$  Typ. (R5900U-20 Type)
- High Speed Response
- Wide Dynamic Range
- Compact
- Weight: Approx. 33 g

## APPLICATIONS

- High Energy Physics
- Flow Cytometer (R5900U-01, -20 Type)
- DNA Sequencer (R5900U-01, -20 Type)
- Pollution Monitoring (NOx) (R5900U-01, -20 Type)



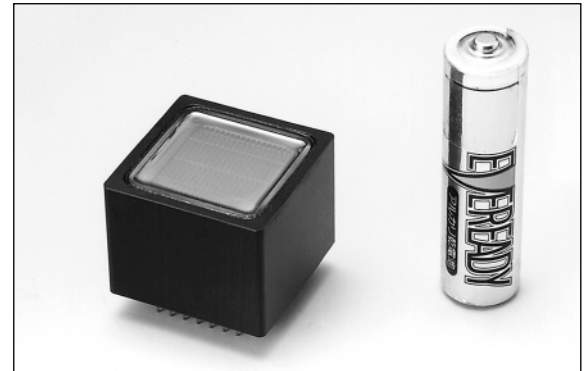


Figure 1: Typical Spectral Response

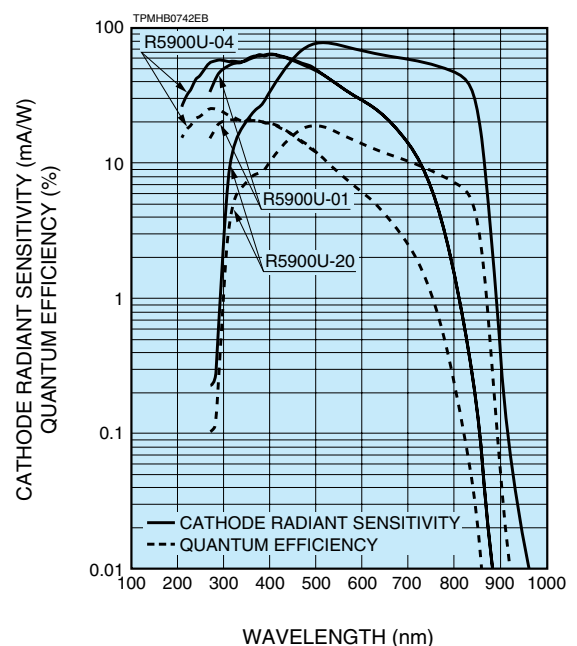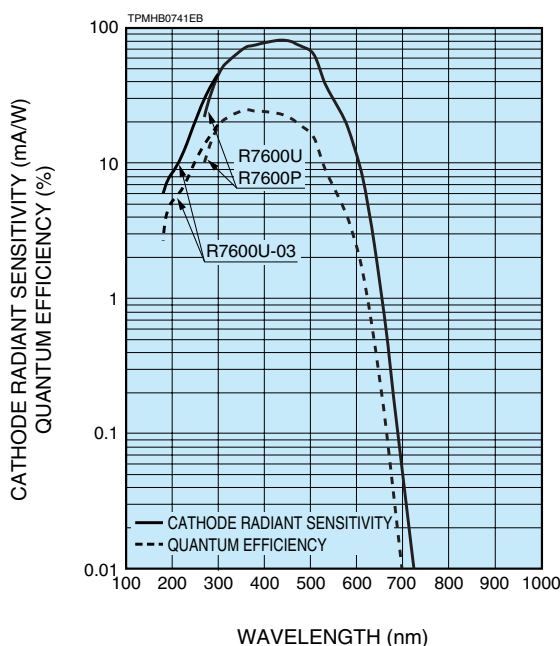

# PHOTOMULTIPLIER TUBE R5900U / R7600U SERIES

Type No.	Spectral Response		Photo-cathode Material	Window Material	Dynode Structure / Stages	Maximum Ratings		Cathode Characteristics				
	Range (nm)	Peak Wavelength (nm)				Supply Voltage Between Anode and Cathode (V)	Average Anode Output Current in Total (mA)	Luminous		Blue Sensitivity Index (CS 5-58) Typ.	Red/White Ratio (R-68) Typ.	Radiant Typ. (mA/W)
								Min. (μA/lm)	Typ. (μA/lm)			
R7600U	300 to 650	420	BA	K	MC/10	900	0.1	60	80	9.5	—	80
R5900U-01	300 to 850	420	MA	K	MC/10	900	0.1	150	200	—	0.25	65
R7600U-03	185 to 650	420	BA	U	MC/10	900	0.1	60	80	9.5	—	80
R5900U-04	185 to 880	420	MA	U	MC/10	900	0.1	150	200	—	0.25	65
R5900U-20	300 to 920	530	MA	K	MC/10	900	0.1	350	500	—	0.4	78
R7600P	300 to 650	420	BA	K	MC/10	900	0.1	60	80	9.5	—	80

**NOTE:** (A) BA: Bialkali, MA: Multialkali  
 (B) K: Borosilicate glass, U: UV glass  
 (C) MC: Metal channel  
 (D) The maximum operating ambient temperature range is -30 °C to +50 °C

Figure 2: Typical Gain

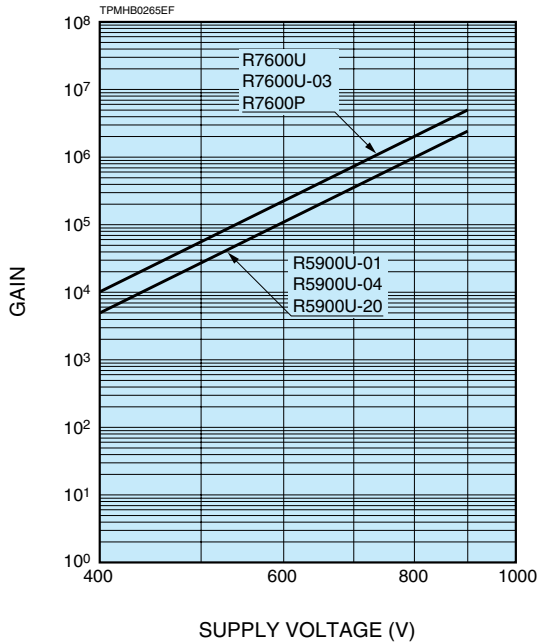


Figure 3: Time Response (Example)


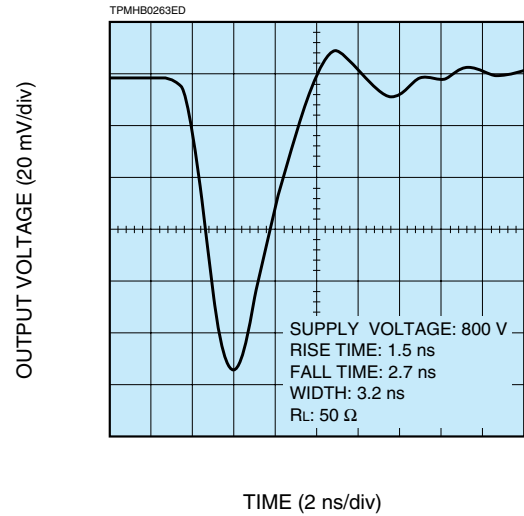


Figure 4: Single Photon Counting (Example)

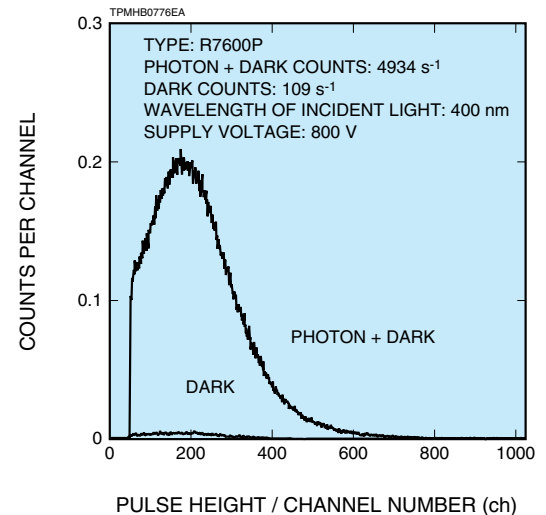

Anode to Cathode Supply Voltage (V)	Anode Characteristics										Type No.		
	Luminous		Gain Typ.	Dark Current (After 30 min)		Dark Count		Time Response				Pulse Linearity	
	Min. (A/lm)	Typ. (A/lm)		Typ. (nA)	Max. (nA)	Typ.	Max.	Rise Time	Transit Time	TTS		2 % Deviation (mA)	5 % Deviation (mA)
			(ns)					(ns)	(ns)				
800	40	160	$2.0 \times 10^6$	2	20	—	—	1.4	9.6	0.35	30	60	R7600U
800	50	200	$1.0 \times 10^6$	10	50	—	—						R5900U-01
800	40	160	$2.0 \times 10^6$	2	20	—	—						R7600U-03
800	50	200	$1.0 \times 10^6$	10	50	—	—						R5900U-04
800	100	500	$1.0 \times 10^6$	20	50	—	—						R5900U-20
800	40	160	$2.0 \times 10^6$	—	—	200	500						R7600P

## VOLTAGE DISTRIBUTION RATIO AND SUPPLY VOLTAGE

Electrodes	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	Dy10	P
Ratio	1.5	1.5	1.5	1	1	1	1	1	1	1	1	1

Supply Voltage: 800 V, K: Cathode, Dy: Dynode, P: Anode

Figure 5: TTS Characteristic (Example)




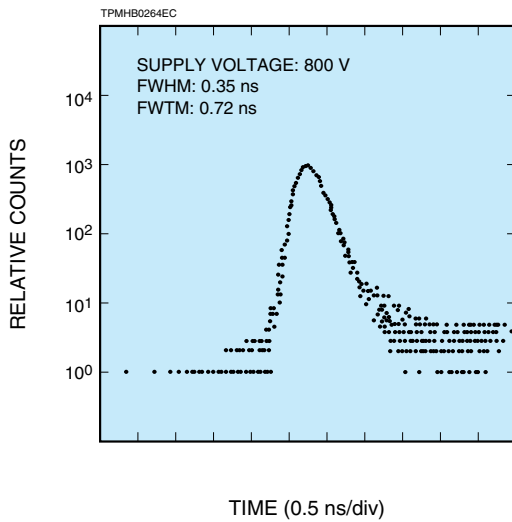


Figure 6: Effect of Magnetic Fields on Anode Output (Example)

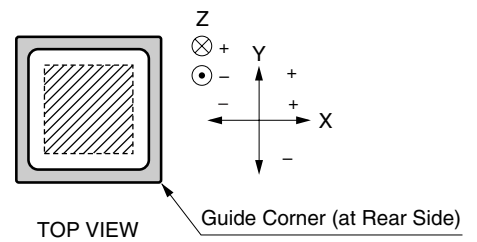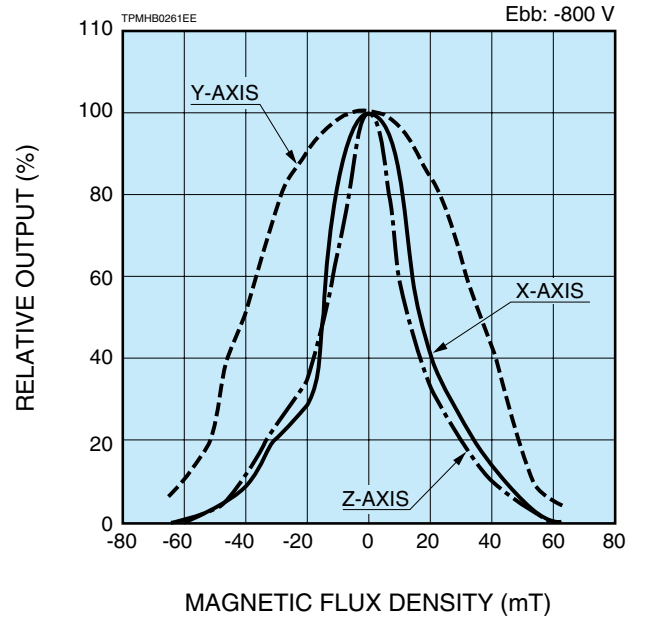

# PHOTOMULTIPLIER TUBE R5900U / R7600U SERIES


Figure 7: Dimensional Outline and Basing Diagram (Unit: mm)

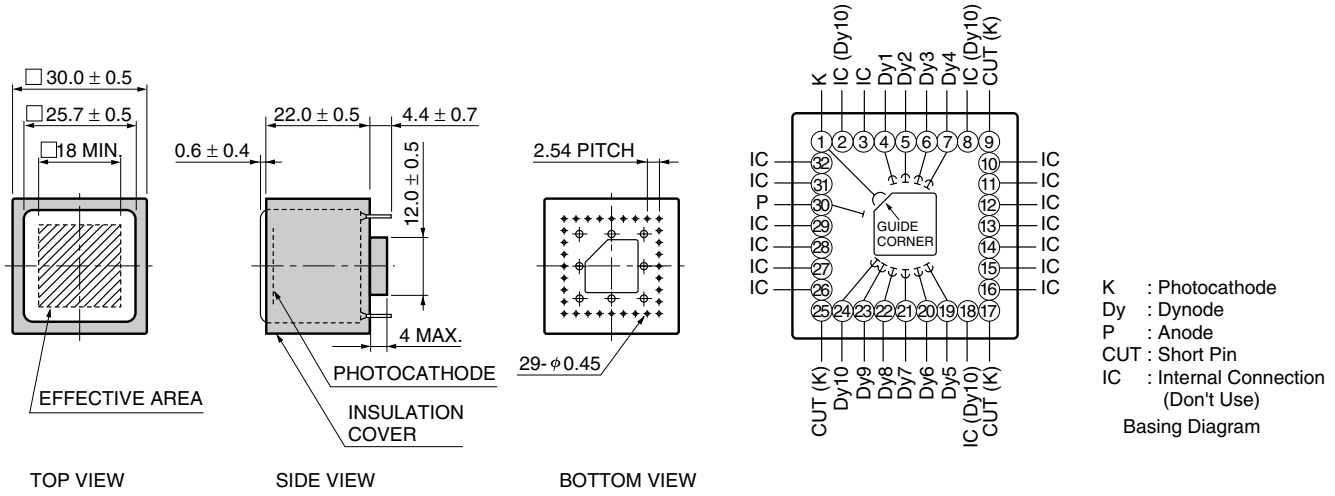

TPMHA0278E1


[ACCESSORIES] (Unit: mm) **SOLD SEPARATELY**

● **Socket E678-32B**

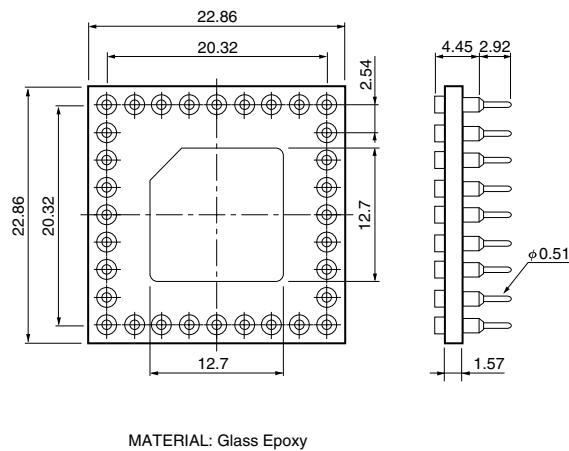

TACCA0094ED

● **D Type Socket Assembly E5996**

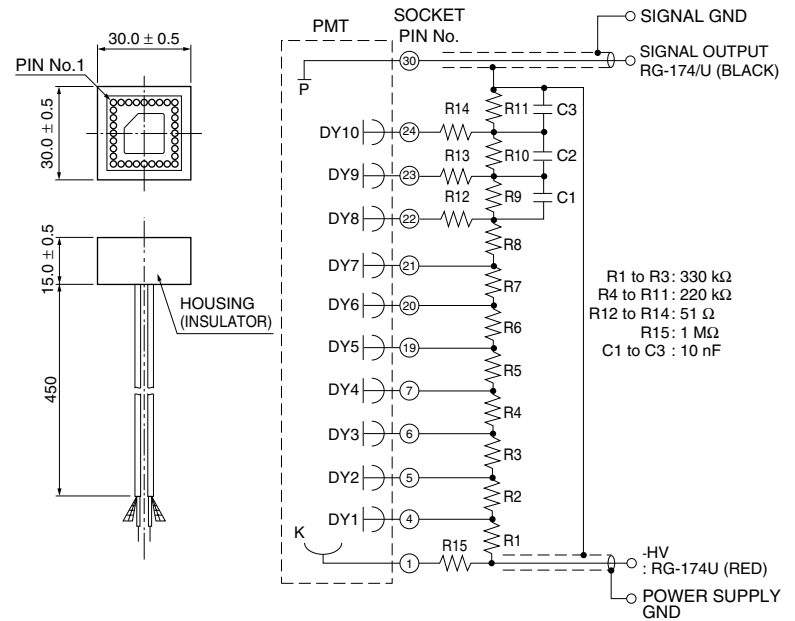

TACCA0234EC

**WARNING ~ High Voltage ~**

The product is operated at high voltage potential. Further, the metal housing of the product is connected to the photocathode (potential) so that it becomes a high voltage potential when the product is operated at a negative high voltage (anode grounded). Accordingly, extreme safety care must be taken for the electrical shock hazard to the operator or the damage to the other instruments.

\* PATENT: USA: 5410211 and other(9), GBR: 551767 and other(9), DEU: 69209809 and other(9), FRA: 551767 and other(9), JPN: 3078905 and other(9)

# HAMAMATSU

WEB SITE [www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation, 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: [usa@hamamatsu.com](mailto:usa@hamamatsu.com)

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road Welwyn Garden City Hertfordshire AL7 1BW, United Kingdom, Telephone: 44-(0)1707-294888, Fax: 44(0)1707-325777 E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741 E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

TPMH1291E03  
SEPT. 2007 IP